

INTERNATIONAL COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents
United States Patent and Trademark
Office
Box PCT
Washington, D.C. 20231
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 03 November 1999 (03.11.99)	Applicant's or agent's file reference
International application No. PCT/GB99/00550	Priority date (day/month/year) 03 March 1998 (03.03.98)
International filing date (day/month/year) 02 March 1999 (02.03.99)	
Applicant BILLINGS, Stephen, Alec et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

01 October 1999 (01.10.99)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<p>The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland</p> <p>Facsimile No.: (41-22) 740.14.35</p>	<p>Authorized officer</p> <p>Marc Salzman</p> <p>Telephone No.: (41-22) 338.83.38</p>
--	---

PATENT COOPERATION TREATY

H.H.

From the
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

PCT

To:

HUTCHINSON, Glenn
DIBB LUPTON ALSOP
Fountain Precinct
Balm Green
Sheffield S1 1RZ
GRANDE BRETAGNE

ENTERED BY

26 MAY 2000

NOTIFICATION OF TRANSMITTAL OF
THE INTERNATIONAL PRELIMINARY
EXAMINATION REPORT

(PCT Rule 71.1)

Date of mailing
(day/month/year)

24.05.2000

Applicant's or agent's file reference
P30524WO

IMPORTANT NOTIFICATION

International application No.
PCT/GB99/00550

International filing date (day/month/year)
02/03/1999

Priority date (day/month/year)
03/03/1998

Applicant

UNIVERSITY OF SHEFFIELD et al.

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the International application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPEA/

European Patent Office
D-80298 Munich
Tel. +49 89 2399 - 0 Tx: 523858 epmu d
Fax: +49 89 2399 - 4465

Authorized officer

Schmethüsen, S

Tel. +49 89 2399-2567/ 7478





PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference P30524WO		FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/GB99/00550	International filing date (day/month/year) 02/03/1999	Priority date (day/month/year) 03/03/1998	
International Patent Classification (IPC) or national classification and IPC H03H17/02			
Applicant UNIVERSITY OF SHEFFIELD et al.			
<p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of 5 sheets, including this cover sheet.</p> <p><input checked="" type="checkbox"/> This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of 3 sheets.</p>			
<p>3. This report contains indications relating to the following items:</p> <ul style="list-style-type: none">I <input checked="" type="checkbox"/> Basis of the reportII <input type="checkbox"/> PriorityIII <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicabilityIV <input type="checkbox"/> Lack of unity of inventionV <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statementVI <input checked="" type="checkbox"/> Certain documents citedVII <input type="checkbox"/> Certain defects in the international applicationVIII <input type="checkbox"/> Certain observations on the international application			
Date of submission of the demand 01/10/1999		Date of completion of this report 24.05.2000	
Name and mailing address of the international preliminary examining authority  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523858 epmu d Fax: +49 89 2399 - 4465		Authorized officer Bourdier, R Telephone No. +49 89 2399 2130 	

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB99/00550

I. Basis of the report

1. This report has been drawn on the basis of (*substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.*):

Description, pages:

1-78 as originally filed

Claims, No.:

1-26,27 (part) as originally filed

27 (part),28-32 as received on 07/03/2000 with letter of 07/03/2000

Drawings, sheets:

1/38-38/38 as originally filed

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
☒ the claims, Nos.: 33-37
☐ the drawings, sheets:

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB99/00550

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**1. Statement**

Novelty (N)	Yes: Claims 1-29,31,32
	No: Claims 30
Inventive step (IS)	Yes: Claims 1-29,31,32
	No: Claims 30
Industrial applicability (IA)	Yes: Claims 1-32
	No: Claims -

2. Citations and explanations:**see separate sheet****VI. Certain documents cited****1. Certain published documents (Rule 70.10)****and / or****2. Non-written disclosures (Rule 70.9)****see separate sheet**

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB99/00550

TO SECTION V

1. The first 3 documents cited in the search report are not considered particularly relevant to the subject matter disclosed in the present application. However the paper "Spectral Amplitude Warping (SAW) for noise spectrum shaping in audio coding", R. Lefebvre, C. Laflamme, 1997 IEEE ICASSP, April 1997, pp 335-338 is considered to be the closest prior art. This document discloses a non linear transformation applied to each frequency sample of the discrete spectrum of a speech signal.

2. Independent claims

- 2.1 The subject matter of claim 1 (design method) and 11 (equivalent design system), in particular the transfer of energy between two specified spectra using the coefficients of a time or spatial domain description of a generalised non-linear system, is neither disclosed nor rendered obvious by the available state of the art and is therefore considered to fulfil the requirements of Article 33(2) and (3) PCT.

The same applies to claim 10, which contains, by reference, the subject matter of claim 1.

The same applies also to claim 20, claiming a computer program product for realizing steps identical to those of claim 1, and to claim 32 claiming an article of manufacture comprising such a computer program.

The same applies also to claim 29, claiming a non-linear system based on the design method of claim 1.

The same applies to claim 31, comprising a data processing system as claimed in any of claims 11 to 19.

- 2.2 The subject matter of claim 30 recites a non-linear system for transferring energy, which must be interpreted as meaning merely "suitable for transferring energy",

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB99/00550

and characterized by comprising means for implementing a method as claimed in any of claims 1 to 9, again interpreted as meaning merely "means suitable for implementing" such methods. Therefore, claim 30 is not considered novel because it does not recite any means which unambiguously and specifically contribute towards executing the novel and inventive method of claim 1, and in its present form amounts to a simple computer.

3. Dependent claims

The dependent claims 2-9,12-19,21-28 are considered novel and inventive for the same reason as the independent claim they depend from.

TO SECTION VI

1. The paper "Narx Approach to black-box modelling of circuit elements", by I.A. Maio, I.S. Stievano, F.G. Canavero, Proceedings of the 1998 IEEE International Symposium on Circuits and Systems, pp 411-414, Monterey, 31 May-03 June 1998 was made available to the public between the priority date of the present application (03 March 1998) and its filing date (02 March 1999).

WO 99/45644

PCT/GB99/00550

the description for the system output spectrum given in terms of the spectrum of the input signal and the coefficients of the time or spatial domain model of the said generalised non-linear system.

5

28. A computer program product as claimed in any of claims 20 to 27, further comprising computer program code means for substituting $H_n(jw_1, \dots, jw_n)$ given in (C21) into (C20), and substituting the resultant expression for $Y_n(jw)$ into (C19) to obtain the description for the system output spectrum in terms of a function of the spectrum of the input signal and the coefficients of the time or spatial domain model of the generalised nonlinear system.

15

29. A method for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies substantially as described herein with reference to and/or as illustrated in the accompanying drawings.

25

30. A method for manufacturing a non-linear system comprising the steps of designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies using a method substantially as

30

WO 99/45644

PCT/GB99/00550

described herein with reference to and/or as illustrated in the accompanying drawings and materially producing the non-linear system so designed.

- 5 31. A data processing system for designing a non-linear system
for transferring energy from a time or spatial domain
input signal having a first spectrum at a first pre-
determinable frequency or range of frequencies to a
10 time or spatial domain output signal having a second
spectrum at a second pre-determinable frequency or
range of frequencies substantially as described herein
with reference to and/or as illustrated in the
accompanying drawings.
- 15
32. A computer program product comprising computer program
'code means for designing and/or implementing a non-
linear system for transferring energy from a time or
spatial domain input signal having a first spectrum at
20 a first pre-determinable frequency or range of
frequencies to a time or spatial domain output signal
having a second spectrum at a second pre-determinable
frequency or range of frequencies substantially as
described herein with reference to and/or as
25 illustrated in the accompanying drawings.
33. A non-linear system for transferring energy from a time
or spatial domain input signal having a first spectrum
at a first predeterminable frequency or range of
30 frequencies to a time or spatial domain output signal
having a second spectrum at a second pre-determinable
frequency or range of frequencies substantially as
described herein with reference to and/or as
illustrated in the accompanying drawings.

WO 99/45644

PCT/GB99/00550

34. A non-linear system which can transfer energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising
- means for identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,
- means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and
- means for giving effect to the energy transfer using coefficients of a time or spatial domain description of a generalised non-linear system, said coefficients having been calculated using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system.
35. A non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising means for implementing a method as claimed in any of claims 1 to 9 or 29.

WO 99/45644

PCT/GB99/00550

36. A non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said non-linear system comprising a data processing system as claimed in any of claims 11 to 19 or 31.

37. An article of manufacture comprising a computer usable medium with computer readable program code means embodied in the medium for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, the computer readable program code means in said article comprising:

computer readable program code means for identifying the first spectrum of a time or spatial domain input signal from which energy is to be transferred,

computer readable program code means for specifying the second spectrum of a time or spatial domain output signal to which said energy is to be transferred, and

computer readable program code means for calculating, using a frequency domain description of the output signal, for example, the output spectrum, expressed in terms of a frequency domain description of the input and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 99/ 00550	International filing date (day/month/year) 02/03/1999	(Earliest) Priority Date (day/month/year) 03/03/1998
Applicant UNIVERSITY OF SHEFFIELD et al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☒ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

4

☐ None of the figures.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/00550

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 H03H17/02		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC 6 H03H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	LEFEBVRE R ET AL: "Spectral amplitude warping (SAW) for noise spectrum shaping in audio coding" 1997 IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING (CAT. NO.97CB36052), 1997 IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING, MUNICH, GERMANY, 21-24 APRIL 1997, pages 335-338 vol.1, XP002104974 ISBN 0-8186-7919-0, 1997, Los Alamitos, CA, USA, IEEE Comput. Soc. Press, USA	1,10,11, 20,30-37
X	see paragraph 2 see paragraph 3	29
A	EP 0 395 424 A (HEWLETT PACKARD CO) 31 October 1990 see column 6, line 2 - line 10 --- -/--	1,10,11, 20,29-37
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search 4 June 1999		Date of mailing of the international search report 17/06/1999
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer D/L PINTA BALLE..., L

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/00550

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 075 880 A (KRESSE JAMES M ET AL) 24 December 1991 see column 13, line 33 - line 49 ---	1,10,11, 20,29-37
A	MAIO I A ET AL: "NARX approach to black-box modeling of circuit elements" ISCAS '98. PROCEEDINGS OF THE 1998 IEEE INTERNATIONAL SYMPOSIUM ON CIRCUITS AND SYSTEMS (CAT. NO.98CH36187), ISCAS '98 PROCEEDINGS OF THE 1998 IEEE INTERNATIONAL SYMPOSIUM ON CIRCUITS AND SYSTEMS, MONTEREY, CA, USA, 31 MAY-3 JUNE 1998, pages 411-414 vol.3, XP002104975 ISBN 0-7803-4455-3, 1998, New York, NY, USA, IEEE, USA see paragraph 2 -----	3

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/00550

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0395424 A	31-10-1990	DE 69028793 D	14-11-1996
		DE 69028793 T	13-02-1997
		JP 2303212 A	17-12-1990
		US 5033018 A	16-07-1991
US 5075880 A	24-12-1991	US 5226000 A	06-07-1993
		US 5260704 A	09-11-1993

PCT

REC'D 26 MAY 2000

WIPO

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference P30524WO	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/GB99/00550	International filing date (day/month/year) 02/03/1999	Priority date (day/month/year) 03/03/1998
International Patent Classification (IPC) or national classification and IPC H03H17/02		
Applicant UNIVERSITY OF SHEFFIELD et al.		



1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 5 sheets, including this cover sheet.

☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

 These annexes consist of a total of 3 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☒ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 01/10/1999	Date of completion of this report 24.05.2000
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Bourdier, R Telephone No. +49 89 2399 2130 

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB99/00550

I. Basis of the report

1. This report has been drawn on the basis of (*substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.*):

Description, pages:

1-78' as originally filed

Claims, No.:

1-26,27 (part) as originally filed

27 (part),28-32 as received on 07/03/2000 with letter of 07/03/2000

Drawings, sheets:

1/38-38/38 as originally filed

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
☒ the claims, Nos.: 33-37
☐ the drawings, sheets:

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB99/00550

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-29,31,32
	No:	Claims	30
Inventive step (IS)	Yes:	Claims	1-29,31,32
	No:	Claims	30
Industrial applicability (IA)	Yes:	Claims	1-32
	No:	Claims	

2. Citations and explanations

see separate sheet

VI. Certain documents cited

1. Certain published documents (Rule 70.10)

and / or

2. Non-written disclosures (Rule 70.9)

see separate sheet

TO SECTION V

1. The first 3 documents cited in the search report are not considered particularly relevant to the subject matter disclosed in the present application. However the paper "Spectral Amplitude Warping (SAW) for noise spectrum shaping in audio coding", R. Lefebvre, C. Laflamme, 1997 IEEE ICASSP, April 1997, pp 335-338 is considered to be the closest prior art. This document discloses a non linear transformation applied to each frequency sample of the discrete spectrum of a speech signal.

2. Independent claims

- 2.1 The subject matter of claim 1 (design method) and 11 (equivalent design system), in particular the transfer of energy between two specified spectra using the coefficients of a time or spatial domain description of a generalised non-linear system, is neither disclosed nor rendered obvious by the available state of the art and is therefore considered to fulfil the requirements of Article 33(2) and (3) PCT.

The same applies to claim 10, which contains, by reference, the subject matter of claim 1.

The same applies also to claim 20, claiming a computer program product for realizing steps identical to those of claim 1, and to claim 32 claiming an article of manufacture comprising such a computer program.

The same applies also to claim 29, claiming a non-linear system based on the design method of claim 1.

The same applies to claim 31, comprising a data processing system as claimed in any of claims 11 to 19.

- 2.2 The subject matter of claim 30 recites a non-linear system for transferring energy, which must be interpreted as meaning merely "suitable for transferring energy",

and characterized by comprising means for implementing a method as claimed in any of claims 1 to 9, again interpreted as meaning merely "means suitable for implementing" such methods. Therefore, claim 30 is not considered novel because it does not recite any means which unambiguously and specifically contribute towards executing the novel and inventive method of claim 1, and in its present form amounts to a simple computer.

3. Dependent claims

The dependent claims 2-9, 12-19, 21-28 are considered novel and inventive for the same reason as the independent claim they depend from.

TO SECTION VI

1. The paper "Narx Approach to black-box modelling of circuit elements", by I.A. Maio, I.S. Stievano, F.G. Canavero, Proceedings of the 1998 IEEE International Symposium on Circuits and Systems, pp 411-414, Monterey, 31 May-03 June 1998 was made available to the public between the priority date of the present application (03 March 1998) and its filing date (02 March 1999).

taking N as \bar{N} and determining the coefficients of the time or spatial domain model of the generalised non-linear system from the description for the system output spectrum given in terms of the spectrum of the input signal and the coefficients of the time or spatial domain model of the said generalised non-linear system.

28. A computer program product as claimed in any of claims 20 to 27, further comprising computer program code means for substituting $H_n(j\omega_1, \dots, j\omega_n)$ given in (C21) into (C20), and substituting the resultant expression for $Y_n(j\omega)$ into (C19) to obtain the description for the system output spectrum in terms of a function of the spectrum of the input signal and the coefficients of the time or spatial domain model of the generalised nonlinear system.

29. A non-linear system which can transfer energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising

means for identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,

means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and

means for giving effect to the energy transfer using coefficients of a time or spatial domain description of a generalised non-linear system, said coefficients having been calculated using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system.

30. A non-linear system to transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising means for implementing a method as claimed in any of claims 1 to 9.

31. A non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said non-linear system comprising a data processing system as claimed in any of claims 11 to 19.

32. An article of manufacture comprising a computer usable medium with computer readable program code means embodied in the medium for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a

time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, the computer readable program code means in said article comprising:

5 computer readable program code means for identifying the first spectrum of a time or spatial domain input signal from which energy is to be transferred,

computer readable program code means for specifying the second spectrum of a time or spatial domain output
10 signal to which said energy is to be transferred, and


computer readable program code means for calculating, using a frequency domain description of the output signal, for example, the output spectrum, expressed in terms of a frequency domain description of the input
15 and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H03H 17/02	A1	(11) International Publication Number: WO 99/45644 (43) International Publication Date: 10 September 1999 (10.09.99)
(21) International Application Number: PCT/GB99/00550 (22) International Filing Date: 2 March 1999 (02.03.99) (30) Priority Data: 9804412.6 3 March 1998 (03.03.98) GB (71) Applicant (for all designated States except US): UNIVERSITY OF SHEFFIELD [GB/GB]; Mappin Street, Sheffield S1 3JD (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): BILLINGS, Stephen, Alec [GB/GB]; 16 Grove Road, Totley, Sheffield S17 4DJ (GB). LANG, Zi, Qiang [CN/GB]; 105 Hawley Street, Sheffield S1 7EA (GB). (74) Agent: HUTCHINSON, Glenn; Dibb Lupton Alsop, Fountain Precinct, Balm Green, Sheffield S1 1RZ (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: NONLINEAR SYSTEM, METHOD OF DESIGN THEREOF AND COMPUTER PROGRAM PRODUCT

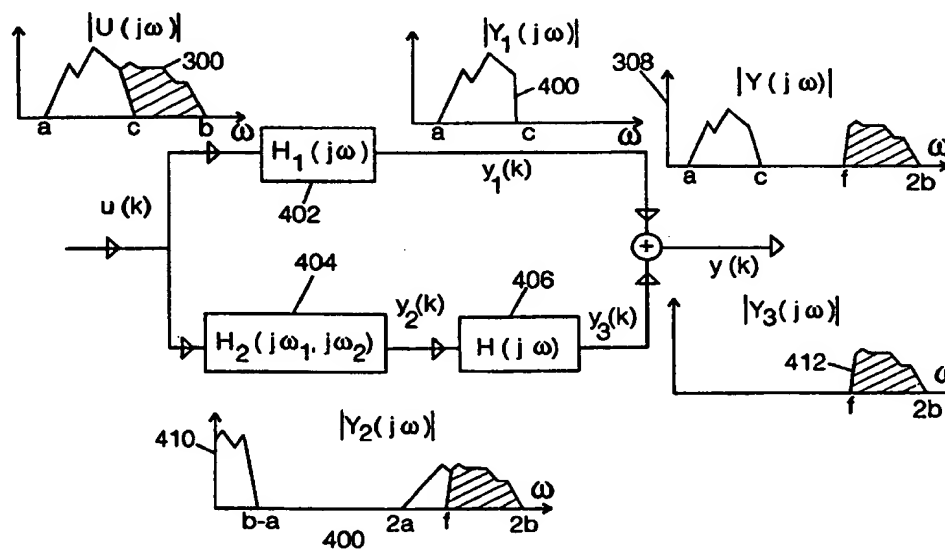**(57) Abstract**

The present invention relates to nonlinear systems and methods of design thereof in the frequency domain. Typically, conventional linear filter design involves attenuating signals at frequencies which are not of interest and dissipating the energy at those frequencies as, for example, heat or sound. However, in most systems, it is not always convenient to design a linear system or design a system solely with energy attenuation in mind. Therefore, the present invention provides a nonlinear system and method of design thereof in the frequency domain which can be used to transfer energy at a first pre-determinable frequency, or frequency range, to a second pre-determinable frequency, or frequency range. Using the method of the present invention a nonlinear system can be developed which can meet given energy transfer requirements or a nonlinear system can be designed which can alter the transfer function of an existing nonlinear or linear system.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**Nonlinear System, Method of Design thereof and
Computer Program Product**

The present invention relates to non-linear systems,
5 methods of design thereof in the frequency domain and
computer program products. More particularly, the present
invention relates to a non-linear system having pre-
determinable frequency response characteristics. The
invention can be utilised to design and realise, for
10 example, nonlinear filters having a required frequency
response or transfer functions having specified transfer
characteristics or within a control system context.

The possible frequency components in an output signal
15 of a linear system are exactly the same as the frequency
components of a corresponding input signal. Conventional
linear filter design is based on the principle that energy
in unwanted frequency bands is attenuated.

20 The Dolby filter, which varies the amplitude of the
output signal as a function of the level and frequency of
the input, is an example of a nonlinear filter system.
However, when compared with the input, the output does not
contain any additional frequency components. Modulation is
25 another concept related to nonlinear filtering, which is
associated with signal transmission where the signal to be
transmitted is modulated by a carrier signal and then
transmitted through a medium. Although a modulation device
allows energy to be moved from one frequency band to
30 another, the output frequency components of such a device
depend not only on the input components but mainly on the
carrier signal. Therefore, the energy transfer implemented
by modulation is realised by a two input and one output

system where one input is the carrier signal and the other input is the signal to be processed.

The prior art lacks a non-linear system and method
5 of/apparatus for the design of such a non-linear system for predictably transferring energy from one frequency or band of frequencies of an input signal to another frequency or band of frequencies independently of any other input signal. Further, the prior art lacks a non-linear control system
10 which can predictably transfer energy from one frequency band to another frequency band.

It is an object of the present invention to at least mitigate some of the problems of the prior art.

15

Accordingly, a first aspect of the present invention provides a method for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable
20 frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies.

Preferably, the method comprises the steps of
identifying the first spectrum of the time or spatial domain
25 input signal from which energy is to be transferred,
specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and
calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed
30 in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system, the

coefficients of a said time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

5 Advantageously, the present invention

allows energy at a particular frequency within a given system to be transferred to another frequency or band of frequencies at which the response of the system is greatly reduced or negligible, or

10 allows energy of a signal which is transmitted at a particular frequency or band of frequencies to be transferred, without using an additional modulating signal, to another frequency or band of frequencies at which the associated transmission media allows signals to pass, or

15 allows energy at a particular band of frequencies to be transferred and spread over a new wider range of frequencies so as to attenuate the energy by employing the desired interkernel and intrakernel effects of nonlinear systems.

20 The present invention is based upon the relationship between the input and output spectra or frequency components of nonlinear systems, and the relationship between the input and output frequencies and/or frequency ranges in the nonlinear case. In addition, the invention utilises a
25 mapping between the time or spatial domains and frequency domain which allows the output spectra or frequency content of nonlinear systems to be described completely by the coefficients of time or spatial domain models which represent the filter or non-linear system to be constructed.

30 A second aspect of the present invention provides a method for manufacturing a non-linear system for transferring energy from a time or spatial domain input

signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said method of manufacture comprising the steps of

5

(a) designing said non-linear system comprising the steps of identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred, specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and

10

calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system, the

15

coefficients of a time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer, and

(b) materially producing the non-linear system so designed.

20

A third aspect of the present invention provides a data processing system which can transfer energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to

25

a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising

means for identifying the first spectrum of the time or spatial domain input signal from which energy is to be

30

transferred,

means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and

means for calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

A fourth aspect of the present invention provides a computer program product for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said computer program product comprising

computer program code means for identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,

computer program code means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and

computer program code means for calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or

spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

A fifth aspect of the present invention provides a non-linear system which can transfer energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising

means for identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,

means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and

means for giving effect to the energy transfer using coefficients of a time or spatial domain description of a generalised non-linear system, said coefficients having been calculated using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system.

25

Advantageously, the fifth embodiment allows processing for the determination of the coefficients to be performed off-line and merely incorporated into a non-linear system which uses the coefficients.

30

Embodiments of the present invention will be described by way of examples only, with reference to the accompanying in which:

figure 1 shows the effect of traditional signal processing by, for example, a linear filter;

figure 2 illustrates signal processing according to one aspect of the present invention;

figure 3 depicts a further example of the signal processing according to the present invention;

figure 4 shows a non-linear system arranged to give effect to the energy transformation shown in figure 3;

figure 5 illustrates a further energy transformation in which energy is distributed over a wider frequency band;

figure 6 illustrates the power spectral densities for the input and output signals of a designed nonlinear system;

figure 7 illustrates the power spectral densities for the input and output signals of another designed nonlinear system;

figure 8 depicts schematically a non-linear system;

figure 9 shows a digital implementation of the non-linear system shown in figure 8;

figure 10 illustrates the power spectral densities for the input and output signals of the nonlinear system which was obtained using a design which improves the filtering effect shown in figure 6;

figure 11 illustrates the power spectral densities for the input and output signals of the nonlinear system which was obtained using a design which improves the filtering effect shown in figure 7;

figure 12 shows the time domain input and output of the nonlinear system with the frequency domain filtering effect shown in figure 10;

figure 13 shows the time domain input and output of the nonlinear system with the frequency domain filtering effect shown in figure 11;

figure 14 depicts the structure of a designed nonlinear system;

figure 15 illustrates the frequency spectrum of a signal to be processed using the present invention;

figure 16 illustrates the result of a Fast Fourier Transform of an input signal having the spectrum shown in figure 15;

figure 17 illustrates the results of the n-dimensional (n= 2 and 3) convolution integration for the spectrum shown in figure 16;

figure 18 illustrates the output magnitude frequency response of a designed nonlinear system to an input signal having the frequency spectrum shown in figure 15;

figure 19 shows the frequency spectrum of a further signal to be processed using the present invention;

figure 20 illustrates the output magnitude frequency response of the same nonlinear system as shown in figure 18 to the further signal to be processed having the frequency spectrum shown in figure 19;

figure 21 illustrates the frequency spectrum of a still further signal to be processed using the present invention;

figure 22 illustrates the output magnitude frequency response of the same nonlinear system as in figure 18 to the still further signal to be processed having the frequency spectrum shown in figure 21;

figure 23 illustrates the structure of another designed nonlinear system;

figure 24 shows the continuous time realisation of the discrete time system in figure 23;

5 figure 25 shows a mechanical implementation of the continuous time system in figure 24;

figure 26 illustrates the result of a Fast Fourier Transform of the further signal shown in figure 19;

10 figure 27 illustrates the output magnitude frequency response of a further designed nonlinear system to the further signal shown in figure 19;

figure 28 illustrates the output magnitude frequency response of a still further designed nonlinear system to the
15 signal shown in figure 15;

figure 29 illustrates the output magnitude frequency response of the nonlinear system shown in figure 28 to the further signal shown in figure 19;

20 figure 30 illustrates a flow chart for designing a nonlinear system according to an embodiment;

figure 31 illustrates a flow chart for designing a nonlinear system according to a further embodiment;

25 figure 32 shows the structure of a nonlinear filter designed based on specifications for both the magnitude and phase of output frequency responses;

30 figure 33 depicts the input and output magnitude frequency characteristics of a specific nonlinear filter designed based on specifications for both the magnitude and phase;

figure 34 shows the phase angle of the spectrum $Y_2(jw)$ in figure 32 in the specific design case shown in figure 33 which reflects the phase response characteristic determined by the design;

figure 35 shows the phase characteristics of the linear phase FIR filter in the specific design case shown in figure 33;

figure 36 depicts the discrete time model of a nonlinear filter designed to focus energy from two different frequency bands into a single frequency band;

figure 37 shows the spectrum of an input signal of the nonlinear filter in figure 36;

figure 38 shows the frequency response of the nonlinear filter in figure 36 to the input in figure 37, which indicates an energy focus effect of the nonlinear filter;

figure 39 illustrates the block diagram of a spatial domain nonlinear filter;

figure 40 depicts the power spectral densities of an input and the corresponding output of the spatial domain nonlinear filter in figure 39;

figure 41 depicts an spatial domain input and corresponding output of the filter in figure 39;

figure 42 shows a one dimensional image to be processed by the spatial domain nonlinear filter in figure 39;

figure 43 shows the one dimensional image obtained by processing the image in figure 42 using the spatial domain nonlinear filter in figure 39; and

5 figure 44 illustrates a data processing system upon which embodiments of the present invention can be implemented.

Referring to figure 1, there is shown the principle of, for example, traditional low pass, high pass, and band pass filtering. Figure 1 shows the power spectrum of a signal 100 both before and after processing. The energy of a signal 100 to be filtered comprises two parts, namely, a first part 102 for further processing or of interest and a second part 104 which is of no interest. Typically, the second part 104 of the signal is attenuated which results in a second signal 106. The second signal 106 comprises the original or a copy of the first part 102 and an attenuated portion or an attenuated version of the second part 108.

20

Figure 2 illustrates the principle of signal processing according to one aspect of the present invention. Figure 2 shows the power spectrum of a signal 200 both before and after processing. The signal comprises a first portion 202 and a second portion 204. The first portion 202 of the signal 200 is of interest for further processing or output. Accordingly, as a result of the signal processing using the present invention, the first portion 202 is retained and the energy in the second portion 204 is translated to another frequency band 206.

30

I. DETAILED DESCRIPTION

The theory and method underlying the present invention will now be described in general terms in steps (i) to (vi).

5 (i) Determine the frequency spectrum of a signal to be processed, including the range of frequencies of the signal.

(ii) Specify the frequency spectrum of the output signal.

10 (iii) Determine the structure of a Nonlinear Auto-Regressive model with eXogenous inputs (NARX model) to ensure that the energy transformation between different frequency bands and other design requirements, for example, specifications for magnitude and/or phase of the output spectrum over the
15 required output frequency band can be met or realised.

The general expression for a NARX model is given by

$$y(k) = \sum_{n=1}^N y_n(k) \quad (1)$$

20 where $y_n(k)$ is a 'NARX nth-order output' given by

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (2)$$

with

$$25 \quad p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, l_{p+q}=1}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

K_n is the maximum lag and $y(\cdot)$, $u(\cdot)$, and $c_{pq}(\cdot)$ are the output, input, and model coefficients respectively. A specific instance of the NARX model such as

$$30 \quad y(k) = 0.3u(k-1) + 0.7y(k-1) - 0.02u(k-1)u(k-1) - 0.04u(k-2)u(k-1) \\ - 0.06y(k-1)u(k-3) - 0.08y(k-2)y(k-3)$$

may be obtained from the general form (1) and (2) with

$c_{01}(1)=0.3$, $c_{10}(1)=0.7$, $c_{02}(1,1)=-0.02$, $c_{02}(2,1)=-0.04$,
 $c_{11}(1,3)=-0.06$, $c_{20}(2,3)=-0.08$, else $c_{pq}(.)=0$

5 Simplified designs will be considered below where the NARX model with only input nonlinearities is employed. However, it will be appreciated by one skilled in the art that the present invention is not limited to use in relation to only input nonlinearities. The present invention can
 10 equally well be used in circumstances of both non-linear outputs and non-linear inputs and outputs. Equally, the invention is not restricted to realisation as a NARX model. The invention may be realised using many alternative model forms either in discrete time or continuous time. Models
 15 such as the Hammerstein and Wiener model, or continuous time models, for example, a nonlinear differential equation model could be used or any other model, including discrete or continuous spatial models, that can be mapped into the frequency domain. However, for each of the models the main
 20 design principle is the same.

The NARX model with only input nonlinearities is given by equation (1) where

$$Y_n(k) = \begin{cases} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) & \text{for } n \geq 2 \\ \sum_{l_1=1}^{K_1} c_{10}(l_1) y(k-l_1) + \sum_{l_1=1}^{K_1} c_{01}(l_1) u(k-l_1) & \text{for } n=1 \end{cases} \quad (3)$$

25 The structure of the NARX model (1) and (3) is defined by the values of N , $K_n, n=1, \dots, N$, and, for each n (an integer between 1 and N inclusive), involves terms of the form

30 $c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) \quad l_i = 1, \dots, K_n, i=1, \dots, n,$

when $n \geq 2$ and

$$c_{10}(l_1)y(k-l_1), c_{01}(l_1)u(k-l_1), \quad l_1 = 1, \dots, K_1$$

5 when $n=1$ in the model.

The parameter N in the non-linear model (1) and (3) is associated with the realisability of the model required to give effect to the energy transformation. The ability to be
10 able to realise the energy transformation is determined from the relationship between the input and output frequencies or frequency ranges of non-linear systems.

The structure parameters K_n , $n=1, \dots, N$, are associated
15 with the extent to which specific design requirements such as the magnitude and/or phase of the output spectrum over the required output frequency band can be satisfied. These parameters are iteratively determined as part of the design. The model could initially be assumed to be of a simple form
20 in terms of these parameters. However, if the initial choice of parameters does not produce a satisfactory design the parameters are progressively or gradually revised according to the energy transfer effect of the resulting non-linear system.

25

For systems described by the NARX model (1) and (3), the relationship between the input and output frequencies or frequency ranges is given by

$$30 \quad f_y = f_{y_n} \cup f_{y_{n-1}} \quad (4)$$

where f_y denotes the range of frequencies of the output, and f_{y_n} and $f_{y_{n-1}}$ denote the ranges of frequencies produced by the
35 N th-order and $(N-1)$ th-order nonlinearities, and

$$f_{y_n} = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases}$$

$n = N \quad \text{and} \quad N-1$

where $[.]$ relates to or means take the integer part,

$$i^* = \left\lceil \frac{na}{(a+b)} \right\rceil + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k = 0, \dots, i^* - 1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

and the frequencies of the signal to be processed are in the range defined by the interval $[a, b]$.

10 Given $[a, b]$ and the required output frequency range f_y , the smallest N for the NARX model (1) and (3) which can bring about the specified frequency domain energy transformation can be determined from equation 4.

15 (iv) Map the NARX model with the structure given in (iii) into the frequency domain to yield the frequency domain description. The frequency domain description is given in terms of the Generalised Frequency Response Functions (GFRFs), $H_n(jw_1, \dots, jw_n)$, $n = 1, \dots, N$, which, after this mapping,
20 are specified in terms of time or spatial domain model parameters.

The mapping of the NARX model (1) and (3) between the time or spatial domain and the frequency domain is given by

25

$$H_n(jw_1, \dots, jw_n) = \frac{1}{\left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(w_1 + \dots + w_n)l_1] \right\} \prod_{l_n=1}^{K_n} c_{nn}(l_n) \exp[-j(w_1 l_1 + \dots + w_n l_n)]}$$

$n = 1, \dots, N \quad (5)$

Therefore the frequency domain properties of the system can be completely defined in terms of the parameters $c_{pq}(\cdot)$ of the time or spatial domain description of the system.

- 5 (v) The output frequency response of the non-linear system (1) and (3) is given by

$$Y(j\omega) = \sum_{n=1}^N Y_n(j\omega) \quad (6)$$

10

where

$$Y_n(j\omega) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{\omega_1 + \dots + \omega_n = \omega} H_n(j\omega_1, \dots, j\omega_n) \prod_{i=1}^n U(j\omega_i) d\sigma_{\omega} \quad (7)$$

with

$$\int_{\omega_1 + \dots + \omega_n = \omega} (\cdot) d\sigma_{\omega}$$

- 15 denoting an integration over the nth-dimensional hyper-plane $\omega_1 + \dots + \omega_n = \omega$

Based on this relationship, the parameters in $H_n(j\omega_1, \dots, j\omega_n), n=1, \dots, N$, which, due to the mapping performed in (iv), are the same parameters as those in the time or spatial domain model are determined. This step enables the shape of the output frequency spectrum $Y(j\omega)$ to be defined which in turn ensures that the spectrum approaches the specified output frequency spectrum as closely as possible.

20

25

Different design specifications can lead to different implementations of corresponding designs.

- (v.1) Firstly, given knowledge of the input spectrum $U(j\omega)$ and the required output spectrum $Y^*(j\omega)$. Substituting (5) and (7) into (6) yields
- 30

$$Y(j\omega) = \frac{1}{\left\{1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-j\omega l_1)\right\}} \sum_{n=1}^N \frac{1/\sqrt{n}}{(2\pi)^{(n-1)}} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \times \int_{w_1+\dots+w_n=\omega} \exp[-j(w_1 l_1 + \dots + w_n l_n)] \prod_{i=1}^n U(j\omega_i) d\sigma_w \quad (8)$$

Equation (8) enables the parameters associated with the time or spatial domain NARX model,

$$c_{0n}(l_1, \dots, l_n), \quad l_1=1, \dots, K_n, \dots, l_n=1, \dots, K_n, \quad n=1, \dots, N,$$

and

$$c_{10}(l_1), \quad l_1=1, \dots, K_1,$$

to be determined as follows to implement the required design:

10

1) Based upon the equation

$$Y^*(j\omega) = \sum_{n=1}^N \frac{1/\sqrt{n}}{(2\pi)^{(n-1)}} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \times \int_{w_1+\dots+w_n=\omega} \exp[-j(w_1 l_1 + \dots + w_n l_n)] \prod_{i=1}^n U(j\omega_i) d\sigma_w \quad (9)$$

determine parameters

15

$$c_{0n}(l_1, \dots, l_n), \quad l_1=1, \dots, K_n, \dots, l_n=1, \dots, K_n, \quad n=1, \dots, N,$$

using a least squares routine to make the right hand side of equation (9) approach the specified output spectrum as closely as possible.

20

The first term on the right hand side of equation (8)

$$\frac{1}{\left\{1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-j\omega l_1)\right\}}$$

25

is omitted from (9). The omitted term represents linear output terms in the time or spatial domain realisation of

the nonlinear system and these may not be needed to achieve the design at this step, hence they are omitted from (9).

2) In order to augment the performance of a filter designed as above, it may be desirable to also design a suitable linear filter $H(jw)$ to improve the approximation to $Y^*(jw)$ obtained in 1) above such that

$$H(jw) \sum_{n=1}^N \frac{1/\sqrt{n}}{(2\pi)^{(n-1)}} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \times \int_{w_1 + \dots + w_n = w} \exp[-j(w_1 l_1 + \dots + w_n l_n)] \prod_{i=1}^n U(jw_i) d\sigma_w$$

can achieve a better approximation to $Y^*(jw)$. As part of this linear design the parameters $c_{10}(l_1)$, $l_1 = 1, \dots, K_1$, which were omitted from (8) to get (9), can be obtained from the parameters of the linear filter.

Design 1 hereafter illustrates the design of a nonlinear system using this first case.

(V.2) Secondly, given the input spectrum $U(jw)$, and a specified bound for the magnitude of the required output spectrum, $Y^{B*}(w)$.

A bound $Y^B(w)$ for the magnitude of the output spectrum $Y(jw)$ of the NARX model (1) and (3) can be expressed as

$$Y^B(w) = \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} |H_n(jw_1, \dots, jw_n)|_w^B \underbrace{|U| \dots |U|}_n(jw) \quad (10)$$

according to the result in Billings, S.A. and Lang, Zi-Qiang, 1996, A bound for the magnitude characteristics of nonlinear output frequency response functions, Part 1:

Analysis and computation. Int. J. Control, Vol.65, pp309-328, where

$$\underbrace{|U|*...*|U(jw)|}_n$$

5 denotes the n-dimensional convolution integration for the magnitude characteristic of the input spectrum and

$$|H_n(jw_1, \dots, jw_n)|_w^B$$

represents a bound for the GFRFs magnitude

$$|H_n(jw_1, \dots, jw_n)|$$

10 with w_1, \dots, w_n satisfying the constraint $w_1 + \dots + w_n = w$. For the NARX model (1) and (3),

$$|H_n(jw_1, \dots, jw_n)|_w^B$$

can be evaluated as follows

$$15 \quad |H_n(jw_1, \dots, jw_n)|_w^B = \frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jw l_1) \right|} \sum_{l_1, l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)| \quad (11)$$

Combining (10) and (11) yields

$$Y^B(w) = \frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jw l_1) \right|} \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U|*...*|U(jw)|}_n \quad (12)$$

20

where

$$C_n = \sum_{l_1, l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|$$

25 Equation (11) enables

$$C_n = \sum_{l_1, l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|$$

and $c_{10}(l_1)$, $l_1=1, \dots, K_1$ to be determined for shaping the bound $Y^B(w)$ for $Y(jw)$ in order to make this bound approach $Y^{B*}(w)$. The procedure which can be used to achieve this is

30 as below.

1) Based upon the equation

$$Y^{B*}(w) = \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U| * \dots * |U|}_n(jw) \quad (13)$$

use a least squares routine to make the right hand side of
 5 the above equation approach $Y^{B*}(w)$ especially over the
 frequencies or frequency range to which the required energy
 transformation needs to be implemented. The coefficients C_n
 $n=1, \dots, N$, in equation (13) must be constrained to be
 positive since C_n is the result of the summation of the
 10 modulus of the coefficients $c_{0n}(l_1, \dots, l_n)$,
 $l_1=1, \dots, K_n, \dots, l_n=1, \dots, K_n$.

The first term on the right hand side of equation (12)

$$\frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jwl_1) \right|}$$

15 is omitted from (13). The omitted term represents linear
 output terms in the time or spatial domain realisation.
 These omitted terms may not be needed to achieve the design
 at this step, hence they are omitted from (13).

20

2) If necessary, the approximation to $Y^{B*}(w)$ in 1) above

can be supplemented using a linear filter with a magnitude
 25 characteristic $|H(jw)|$ such that

$$|H(jw)| \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U| * \dots * |U|}_n(jw)$$

provides a better approximation to the specified bound and
 as a result $c_{10}(l_1)$, $l_1=1, \dots, K_1$, which were omitted from
 30 (12) to get (13), can be obtained from the linear filter
 parameters.

Design 2 hereafter illustrates the detailed procedure of the above and several examples of the design.

(V.3) Thirdly, there are many practical situations which should be dealt with on an individual basis. There follows examples of two such situations.

(a) Referring to figure 3 there is shown an input signal having a spectrum $U(jw)$ 300 which comprises a portion 302 of interest, between frequencies a and e , and an portion 304, between frequencies e and b , to be translated to another frequency range 306 defined by frequencies f and $2b$ while retaining the portion of interest 302 within the output signal 308.

In order to realise the energy transformation shown in figure 3, a non-linear system 400 can be constructed as illustrated in figure 4 which comprises means 402, 404 and 406 for implementing the following components

$H_1(jw)$, $H_2(jw_1, jw_2)$, and $H(jw)$.

$H_1(jw)$ 402 and $H(jw)$ 406 can be implemented readily using classical linear band pass filters, while $H_2(jw_1, jw_2)$ 404 can be constructed in the time or spatial domain as shown in the equation below

$$y_2(k) = \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i)$$

with the parameters, $c_{02}(l_1, l_2)$, $l_1 = 1, \dots, K_2$, $l_2 = 1, \dots, K_2$ being determined to produce the signal $y_2(k)$ with a required frequency characteristic. Each of the components 402, 404

and 406 have corresponding frequency responses 408, 410 and 412. Consequently, the whole non-linear system can be realised as a non-linear time or spatial domain filter as

$$\begin{aligned}
 5 \quad y(k) &= H_1(q^{-1})u(k) + H(q^{-1}) \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) \\
 &= \frac{H_{1N}(q^{-1})}{H_{1D}(q^{-1})} u(k) + \frac{H_N(q^{-1})}{H_D(q^{-1})} \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i)
 \end{aligned}$$

where

$$H_1(q^{-1}) = \frac{H_{1N}(q^{-1})}{H_{1D}(q^{-1})}, \quad H(q^{-1}) = \frac{H_N(q^{-1})}{H_D(q^{-1})}$$

10

are the backward shift operator descriptions of the linear filters which have the frequency response functions $H_1(j\omega)$ and $H(j\omega)$, respectively.

15

The equation for $y(k)$ can be further written as

$$H_{1D}(q^{-1})H_D(q^{-1})y(k) = H_{1N}(q^{-1})H_D(q^{-1})u(k) + H_N(q^{-1})H_{1D}(q^{-1}) \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i)$$

which is clearly a NARX model that can be described by equations (1) and (3).

20

Although the above shows energy transformation from a frequency band to a higher frequency band, energy can equally well be transferred from one frequency band to a lower frequency band.

25

(b) If the objective of the energy transformation and hence the desired non-linear system is only to distribute energy of the signal to be processed over a wider frequency band without energy amplification then a simpler model may be sufficient. Referring to figure 5, there is shown schematically an input signal 500 in the frequency domain comprising energy between frequencies a and b. The desired output frequency spectrum 502 comprises two portions, a lower frequency portion 504 and a higher frequency portion

30

506. It will be appreciated that the energy of the input signal 500 is to be spread over the two frequency ranges 504 and 506.

5 A quadratic filter, for example,

$$y(k) = \alpha u^2(k)$$

can be designed to redistribute energy of the original signal $u(k)$, with frequency components over the frequency
10 band $[a,b]$, to the new ranges $[0,b-a]$ and $[2a,2b]$ without energy amplification provided an appropriate α is selected in the design process described above.

(vi) The final step in the design process is to
15 materially realise, that is, to physically realise the designed filter using appropriate software or hardware or combination of software and hardware.

Although the present invention has been described above
20 with reference to a NARX model, it will be appreciated that the present invention is not limited thereto. The method and realisation of non-linear systems having pre-determinable frequency or energy transfer characteristics can equally well be utilised using other forms of
25 descriptions of non-linear systems or models where there exists a requirement to transform or transfer energy at one frequency or band of frequencies to energy at another frequency or band of frequencies.

30 The present invention can be used to realise energy transformations over frequencies using a nonlinear system or

to modify energy transformation of an existing linear or non-linear system.

Furthermore, the present invention can be applied or
5 utilised in the field of design and realisation of
electronic circuits or filters. The energy in the input
signal at a particular frequency or band of frequencies is
transferred to desired frequency bands. Similarly, in
mechanical systems, the addition of non-linear mechanisms
10 could transfer the energy of a vibration at an undesirable
frequency to some other frequency. The present invention
may also find application in the field of fluid mechanics,
for example, in the effects of flow around objects (e.g. oil
platform legs), noise in ducting and pipe flow systems.

15

Alternatively, the modifications which are required to
be effected to a known linear or non-linear system, for
example, a mechanical system, in order to bring about a
particular frequency distribution of energy can be
20 determined using the present invention and then the linear
or non-linear system can be so modified.

II. EXAMPLES

25 II.1 DESIGN 1

Design No.1 shows an example of how the energy of an
input signal having predetermined frequency components can
be transferred to other frequencies.

30

Consider digitally filtering an input signal
 $u(t) = \cos t + \cos 2t,$

(14)

wherein the sampling period is $T=1/100$ s.

The first step is to determine the frequency spectrum of the signal to be processed. The frequency spectrum of the signal to be processed comprises input frequencies $w_{a1}=1$ and $w_{a2}=2$.

The second step is to specify the output frequency characteristics of the filter. Two different filtering problems will be considered for this example.

The specification for the first problem is to transfer the energy in $u(t)$ to the output frequency $w_{ao}=0$ and the specification for the second problem is to transfer the energy in $u(t)$ to the output frequency $w_{ao}=4$.

Since the sampling period is $T=1/100$ s, the digital input to the filter is

$$u(k) = \cos \frac{1}{100}k + \cos \frac{2}{100}k \quad \text{for } k=0,1,\dots, \quad (15)$$

the normalised input frequencies are therefore

$$w_{d1}=1/100 \quad \text{and} \quad w_{d2}=2/100,$$

and the required normalised output frequencies are

$w_{do}=0$ for the first filtering problem and $w_{do}=4/100$ for the second filtering problem.

For this example, the output frequencies produced by the n th-order nonlinearity of a non-linear filter are distributed uniformly in

$$f_{v_n} = \begin{cases} \bigcup_{j=0}^{i^*-1} I_j, & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{j=0}^{i^*} I_j, & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases} \quad (16)$$

where $a = \frac{1}{100}$, $b = \frac{2}{100}$, $[x]$ means to take the integer part of x , and

$$i^* = \left\lceil \frac{na}{(a+b)} \right\rceil + 1,$$

$$I_j = [na - j(a+b), nb - j(a+b)] \quad \text{for } j=0, \dots, i^*-1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

with the difference between any two neighbouring frequencies

$$\text{being } \Delta = \frac{2}{100} - \frac{1}{100} = \frac{1}{100}.$$

10 For $n=1$, it can be evaluated from the above equations that

$$f_{x_1} = \left[\frac{1}{100}, \frac{2}{100} \right] \quad (17)$$

and the corresponding output frequencies are

$$\left\{ \frac{1}{100}, \frac{2}{100} \right\}$$

15

For $n=2$, it can be similarly obtained that

$$f_{x_2} = I_0 \cup I_1 = \left[\frac{2}{100}, \frac{4}{100} \right] \cup \left[0, \frac{4}{100} - \frac{3}{100} \right] = \left[\frac{2}{100}, \frac{4}{100} \right] \cup \left[0, \frac{1}{100} \right]$$

and the corresponding output frequencies are

$$\left\{ 0, \frac{1}{100}, \frac{2}{100}, \frac{3}{100}, \frac{4}{100} \right\}$$

20

Therefore, a NARX model of up to second order nonlinearity will be sufficient to realise the energy transformations required by the filtering example thereby addressing the third step in the design process.

25 According to the above analysis, select a NARX model of the form

$$y(k) = \sum_{k_1=1}^{K_1} c_{10}(k_1) y(k-k_1) + \sum_{k_1=0}^{K_2} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) u(k-k_1) u(k-k_2) \quad (18)$$

as the basic structure for the non-linear filter and take $K_2=1$ for simplicity. The parameters $K_1, c_{10}(1), \dots, c_{10}(K_1)$ and $c_{02}(k_1, k_2)$, $k_1=0,1$ and $k_2=0,1$, then need to be determined to completely specify the design.

5

In order to derive the procedures for determining these parameters, consider the frequency domain characteristics of the filter model (18). According to J.C.Peyton Jones and S.A.Billings, Recursive Algorithm for Computing the
10 Frequency Response of a Class of Non-linear Difference Equation Models, Int. J. Control, 1989, Vol.50, No.5, 1925-1940, the generalised frequency response functions of this filter model are

$$\left\{ \begin{array}{l} H_1(j\omega) = 0 \\ H_2(j\omega_1, j\omega_2) = \frac{\sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \exp[-j(\omega_1 k_1 + \omega_2 k_2)]}{\left[1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j(\omega_1 + \omega_2)k_1] \right]} \\ H_n(j\omega_1, \dots, j\omega_n) = 0 \quad \text{for } n \geq 3 \end{array} \right. \quad (19)$$

15

The output frequency response of the filter (18) under the input

$$u(k) = \cos \frac{1}{100} k + \cos \frac{2}{100} k = \sum_{i=-K, i \neq 0}^K \frac{A(\omega_i)}{2} e^{j\omega_i k} \quad , \quad (20)$$

with $K=2$, $A(\omega_i)=1$, $\omega_i = \frac{i}{100}$, $\omega_{-i} = -\omega_i$, $i = \pm 1, \pm 2$, can be

20

25

written as

$$\tilde{Y}(j\omega) = \sum_{n=1}^N \tilde{Y}_n(j\omega) = \tilde{Y}_2(j\omega) = \begin{cases} \frac{1}{2} \sum_{\omega_{i_1} + \omega_{i_2} = \omega} A(\omega_{i_1}) A(\omega_{i_2}) H_2(j\omega_{i_1}, j\omega_{i_2}) & \text{for } \omega > 0 \\ \frac{1}{4} \sum_{\omega_{i_1} + \omega_{i_2} = \omega} A(\omega_{i_1}) A(\omega_{i_2}) H_2(j\omega_{i_1}, j\omega_{i_2}) & \text{for } \omega = 0 \end{cases} \quad (21)$$

30

where $i_1, i_2 \in \{-2, -1, +1, +2\}$, $\tilde{Y}(j\omega)$ is related to the output spectrum $Y(j\omega)$ by

$$\tilde{Y}(j\omega) = \begin{cases} 2Y(j\omega) & \text{for } \omega > 0 \\ Y(j\omega) & \text{for } \omega = 0 \end{cases}$$

and, similarly, $\tilde{Y}_n(j\omega)$ is related to the nth-order output spectrum $Y_n(j\omega)$ by

$$\tilde{Y}_n(j\omega) = \begin{cases} 2Y_n(j\omega) & \text{for } \omega > 0 \\ Y_n(j\omega) & \text{for } \omega = 0 \end{cases}$$

This is a specific form of the general expression for output frequency responses of non-linear systems which are given by

$$Y(j\omega) = \sum_{n=1}^N Y_n(j\omega) \quad (22)$$

10 where

$$Y_n(j\omega) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{\omega_1 + \dots + \omega_n = \omega} H_n(j\omega_1, \dots, j\omega_n) \prod_{i=1}^n U(j\omega_i) d\sigma_\omega \quad (23)$$

with

$$\int_{\omega_1 + \dots + \omega_n = \omega} (.) d\sigma_\omega$$

denoting an integration over the nth-dimensional hyper-plane

15 $\omega_1 + \dots + \omega_n = \omega$ and N being the maximum order of the dominant system nonlinearities.

Substituting (19) into (21) yields

$$\begin{aligned}\tilde{Y}(j\omega) &= \frac{1}{2} \sum_{w_{i_1}+w_{i_2}=w} A(w_{i_1}) A(w_{i_2}) \frac{\sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \exp[-j(w_{i_1}k_1 + w_{i_2}k_2)]}{\left[1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j(w_{i_1} + w_{i_2})k_1]\right]} \\ &= \frac{1}{1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j\omega k_1]} \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{1}{2} \sum_{w_{i_1}+w_{i_2}=w} A(w_{i_1}) A(w_{i_2}) \exp[-j(w_{i_1}k_1 + w_{i_2}k_2)] \\ &= H(j\omega) \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f(w, k_1, k_2) \quad \text{for } w > 0\end{aligned}\quad (24)$$

5 and

$$\tilde{Y}(j\omega) = H(j\omega) \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f(w, k_1, k_2)}{2} \quad \text{for } w = 0 \quad (25)$$

where

$$H(j\omega) = \frac{1}{1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j\omega k_1]} \quad (26)$$

$$10 \quad f(w, k_1, k_2) = \frac{1}{2} \sum_{w_{i_1}+w_{i_2}=w} A(w_{i_1}) A(w_{i_2}) \exp[-j(w_{i_1}k_1 + w_{i_2}k_2)] \quad (27)$$

Moreover denoting

$$\bar{Y}(j\omega) = \begin{cases} \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f(w, k_1, k_2) & \text{for } w > 0 \\ \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f(w, k_1, k_2)}{2} & \text{for } w = 0 \end{cases} \quad (28)$$

gives

$$15 \quad \tilde{Y}(j\omega) = H(j\omega) \bar{Y}(j\omega). \quad w \geq 0 \quad (29)$$

In view of the fact that $H(j\omega)$ is the frequency response function of a classical linear filter and $\bar{Y}(j\omega)$ is a linear function of the filter parameters $c_{02}(k_1, k_2)$,
20 $k_1=0,1$ and $k_2=0,1$, the procedures for determining the parameters of the non-linear filter with the given design requirements and the structure (18) are given as :

(a) From the design requirements, determine the desired output frequency characteristic $\tilde{Y}^*(j\omega)$ and choose the parameters $c_{02}(k_1, k_2)$, $k_1=0,1$ and $k_2=0,1$, appropriately to make $\bar{Y}(j\omega)$ approximate $\tilde{Y}^*(j\omega)$ as well as possible.

5

(b) Examine the filtering effect of

$$\bar{Y}(k) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}(k_1, k_2) u(k-k_2) u(k-k_2), \quad (30)$$

where $\hat{c}_{02}(k_1, k_2)$, $k_1=0,1$, $k_2=0,1$, are the results obtained in the procedure (a). If the effect is acceptable, then
 10 choose $H(j\omega)=1$ so that the filter parameters
 $c_{10}(1)=c_{10}(2)=\dots=c_{10}(K_1)=0$;
 otherwise design the classical linear filter $H(j\omega)$ to make
 $H(j\omega)\bar{Y}(j\omega)$ satisfy the requirements for the output frequency characteristics and obtain the filter parameters
 15 $K_1, c_{10}(1), c_{10}(2), \dots, c_{10}(K_1)$ at the same time.

Therefore, in order to address the first problem to transfer energy from $u(t)$, $w_{a1}=1$ and $w_{a2}=2$, to the output frequency $w_{a0}=0$, take

$$20 \quad \tilde{Y}^*(j0)=1, \quad \tilde{Y}^*(jw_i)=0, \quad w_i = \frac{i}{100}, \quad i=1,2,3,4.$$

and for the second problem to transfer energy from $u(t)$, $w_{a1}=1$ and $w_{a2}=2$, to the output frequency $w_{a0}=4$, take

$$\tilde{Y}^*(j\frac{4}{100})=1, \quad \tilde{Y}^*(jw_i)=0, \quad w_i = \frac{i}{100}, \quad i=1,2,3,0.$$

25 The filter parameters $\hat{c}_{02}(k_1, k_2)$, $k_1=0,1$, $k_2=0,1$, can then be determined through the group equations

$$\left\{ \begin{array}{l} \operatorname{Re}[\tilde{Y}^*(j0)] = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f^R(0, k_1, k_2)}{2} \\ \vdots \\ \operatorname{Re}\left[\tilde{Y}^*\left(j\frac{4}{100}\right)\right] = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f^R\left(\frac{4}{100}, k_1, k_2\right) \\ \operatorname{Im}[\tilde{Y}^*(j0)] = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f^I(0, k_1, k_2)}{2} \\ \vdots \\ \operatorname{Im}\left[\tilde{Y}^*\left(j\frac{4}{100}\right)\right] = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f^I\left(\frac{4}{100}, k_1, k_2\right) \end{array} \right. \quad (31)$$

by the least squares method. In (31) $f^R(\cdot)$ and $f^I(\cdot)$ represent the real and imaginary parts of $f(\cdot)$.

5

Rewrite (31) as

$$\tilde{Y} = \bar{X}\theta \quad (32)$$

where

$$\tilde{Y} = \left[\operatorname{Re}[\tilde{Y}^*(j0)], \dots, \operatorname{Re}[\tilde{Y}^*(j\frac{4}{100})], \operatorname{Im}[\tilde{Y}^*(j0)], \dots, \operatorname{Im}[\tilde{Y}^*(j\frac{4}{100})] \right]^T \quad (33)$$

$$5 \quad \theta = [c_{02}(0,0), c_{02}(1,1), c_{02}(0,1) + c_{02}(1,0)]^T \quad (34)$$

$$\begin{aligned} \bar{X} &= \begin{bmatrix} \frac{f^R(0,0,0)}{2}, & \frac{f^R(0,1,1)}{2}, & \frac{f^R(0,0,1)}{2} \\ \vdots & \vdots & \vdots \\ f^R(\frac{4}{100}, 0, 0), & f^R(\frac{4}{100}, 1, 1), & f^R(\frac{4}{100}, 0, 1) \\ \frac{f^I(0,0,0)}{2}, & \frac{f^I(0,1,1)}{2}, & \frac{f^I(0,0,1)}{2} \\ \vdots & \vdots & \vdots \\ f^I(\frac{4}{100}, 0, 0), & f^I(\frac{4}{100}, 1, 1), & f^I(\frac{4}{100}, 0, 1) \end{bmatrix} \\ &= \begin{bmatrix} \frac{4}{2} & \frac{4}{2} & \sum_{i=-2}^2 \frac{\cos \frac{i}{100}}{2} \\ 2 & 2 \cos \frac{1}{100} & \cos \frac{1}{100} + \cos \frac{1}{100} \\ 1 & \cos \frac{2}{100} & \cos \frac{1}{100} \\ 2 & 2 \cos \frac{3}{100} & \cos \frac{1}{100} + \cos \frac{2}{100} \\ 1 & \cos \frac{4}{100} & \cos \frac{2}{100} \\ \frac{0}{2} & \frac{0}{2} & \sum_{i=-2}^2 \frac{\sin \frac{i}{100}}{2} \\ 0 & -2 \sin \frac{1}{100} & \sin \frac{1}{100} - \sin \frac{2}{100} \\ 0 & -\sin \frac{2}{100} & -\sin \frac{1}{100} \\ 0 & -2 \sin \frac{3}{100} & -\sin \frac{1}{100} - \sin \frac{2}{100} \\ 0 & -\sin \frac{4}{100} & -\sin \frac{2}{100} \end{bmatrix}. \end{aligned} \quad (35)$$

Notice that θ can be written in the form of (34) due to the fact that

$$10 \quad f(w, 0, 1) = f(w, 1, 0). \quad (36)$$

Therefore, the filter parameters θ for the first filtering problem to transfer energy from $u(t)$,

$w_{a1} = 1$ and $w_{a2} = 2$, to the output frequency $w_{a0} = 0$ can be

15 obtained as

$$\hat{\theta}_1 = (\bar{X}^T \bar{X})^{-1} \bar{X}^T \tilde{Y}_1 \quad (37)$$

where

$$\tilde{Y}_1 = \left[1, \overbrace{0, \dots, 0}^4, \overbrace{0, \dots, 0}^5 \right]^T, \quad (38)$$

and the parameters θ for the second filtering problem to transfer energy from $u(t)$, $w_{a1}=1$ and $w_{a2}=2$, to the output frequency $w_{a0}=4$ can be obtained as

$$\hat{\theta}_2 = (\bar{X}^T \bar{X})^{-1} \bar{X}^T \bar{Y}_2 \quad (39)$$

5 where

$$\bar{Y}_2 = \left[\overbrace{0, \dots, 0}^4 \ 1 \ \overbrace{0, \dots, 0}^5 \right]^T. \quad (40)$$

The results of computing (37) and (39) are

$$\hat{\theta}_1 = \begin{bmatrix} \hat{C}_{02}^1(0,0) \\ \hat{C}_{02}^1(1,1) \\ \hat{C}_{02}^1(0,1) + \hat{C}_{02}^1(1,0) \end{bmatrix} = \begin{bmatrix} 1187 \\ 1187 \\ -2373.8 \end{bmatrix} \quad (41)$$

and

$$10 \quad \hat{\theta}_2 = \begin{bmatrix} \hat{C}_{02}^2(0,0) \\ \hat{C}_{02}^2(1,1) \\ \hat{C}_{02}^2(0,1) + \hat{C}_{02}^2(1,0) \end{bmatrix} = \begin{bmatrix} -1206.2 \\ -1206.2 \\ 2413.2 \end{bmatrix} \quad (42)$$

respectively.

Under the input of (20), the power spectral densities of the input and output of the non-linear filter

$$15 \quad \begin{aligned} \bar{Y}_1(k) &= \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{C}_{02}^1(k_1, k_2) u(k-k_1) u(k-k_2) \\ &= \hat{C}_{02}^1(0,0) u^2(k) + \hat{C}_{02}^1(1,1) u^2(k-1) + [\hat{C}_{02}^1(1,0) + \hat{C}_{02}^1(0,1)] u(k-1) u(k) \end{aligned} \quad (43)$$

which is initially designed to address the first filtering problem above, are shown in figure 6, and the power spectral
20 densities of the input and output of the non-linear filter

$$\begin{aligned}\bar{y}_2(k) &= \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}^2(k_1, k_2) u(k-k_1) u(k-k_2) \\ &= \hat{c}_{02}^2(0, 0) u^2(k) + \hat{c}_{02}^2(1, 1) u^2(k-1) + [\hat{c}_{02}^2(1, 0) + \hat{c}_{02}^2(0, 1)] u(k-1) u(k)\end{aligned}\quad (44)$$

which is initially designed to address the second filtering
5 problem above, are shown in figure 7.

Further improvement to the performances of the filters
(43) and (44) may be possible. Therefore, a linear filter,
 $H(jw)$, is designed in order to further improve the filter
10 performances.

To improve the performance of the filter (43) for the
first filtering problem, $H(jw)$ is designed to be a fifth
order low-pass type 1 Chebyshev filter with cut off
15 frequency 0.5 rad/sec and 0.5 dB of ripple in the pass-band
to ensure a satisfactory frequency response over the pass
band. The result is

$$\begin{aligned}H_1(jw) &= \frac{b^1(1) + b^1(2)z^{-1} + \dots + b^1(6)z^{-5}}{1 - a^1(2)z^{-1} - \dots - a^1(6)z^{-5}} \Big|_{z=e^{jw}} \\ &= 10^{-12} \frac{0.0174 + 0.0853z^{-1} + 0.1812z^{-2} + 0.1652z^{-3} + 0.0933z^{-4} + 0.0159z^{-5}}{1 + 4.9941z^{-1} - 9.9765z^{-2} + 9.9648z^{-3} - 4.9766z^{-4} + 0.9942z^{-5}} \Big|_{z=e^{jw}}\end{aligned}\quad (45)$$

To improve the performance of the filter (44) for the
second problem, $H(jw)$ is designed to be a fifth order high-
pass type 1 Chebyshev filter with cut off frequency 3.9
rad/sec and 0.5 dB of ripple in the pass band for the same
25 purpose as in the first problem case. The result is

$$\begin{aligned}H_2(jw) &= \frac{b^2(1) + b^2(2)z^{-1} + \dots + b^2(6)z^{-5}}{1 - a^2(2)z^{-1} - \dots - a^2(6)z^{-5}} \Big|_{z=e^{jw}} \\ &= \frac{0.9218 - 4.6088z^{-1} + 9.2175z^{-2} - 9.2175z^{-3} + 4.6088z^{-4} - 0.9218z^{-5}}{1 + 4.8381z^{-1} - 9.3635z^{-2} + 9.0613z^{-3} - 4.3846z^{-4} + 0.8486z^{-5}} \Big|_{z=e^{jw}}\end{aligned}\quad (46)$$

The purpose of the additional linear filter is to
30 attenuate unwanted frequency components in the outputs of

the filters (43) and (44) for the above two filtering problems respectively to make the output of the additional filter satisfy the corresponding design requirement.

5 It will be appreciated that the filter parameters $K_1, c_{10}(1), \dots, c_{10}(K_1)$, associated with the expression $\left\{1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j\omega k_1]\right\}$ in $H(j\omega)$ can be obtained as a result of dividing the denominator of $H(j\omega)$ by the numerator of $H(j\omega)$. The specific $H(j\omega)$ is given by $H_1(j\omega)$ and $H_2(j\omega)$ in
10 equations (45) and (46) for the two filtering problems respectively.

The general description for the nonlinear filters
15 designed as above is

$$\begin{aligned} y(k) - \sum_{k_1=1}^{K_1} c_{10}(k_1) y(k-k_1) &= \left[1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) q^{-k_1}\right] y(k) = \bar{H}(q^{-1}) y(k) \\ &= \sum_{k_1=0}^{K_2} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) u(k-k_1) u(k-k_2) = \sum_{k_1=0}^{K_2} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) q_1^{-k_1} q_2^{-k_2} u(k) \end{aligned} \quad (47)$$

where

$$20 \quad \bar{H}(q^{-1}) = \left(1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) q^{-k_1}\right), \quad (48)$$

and q^{-1} , q_1^{-1} and q_2^{-1} denote the backward shift operators. Another expression in the time domain for (47) is

$$y(k) = \bar{H}^{-1}(q^{-1}) \left[\sum_{k_1=0}^{K_2} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) q_1^{-k_1} q_2^{-k_2} \right] u(k) \quad (49)$$

25 Therefore, embodiments of the non-linear filters which have been designed can be realised in a manner as shown in figure 8 or more specifically as shown figure 9.

It will be appreciated that in figure 8 the two
30 components 800 and 802 are represented by

$$G_1(q_1^{-1}, q_2^{-1}) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) q_1^{-k_1} q_2^{-k_2}$$

and

$$G_2(q^{-1}) = \bar{H}^{-1}(q^{-1}) = \frac{b(1) + b(2)q^{-1} + \dots + b(6)q^{-5}}{1 - a(2)q^{-1} - \dots - a(6)q^{-5}}$$

For the first filtering problem in this example

$$G_1(q_1^{-1}, q_2^{-1}) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}^1(k_1, k_2) q_1^{-k_1} q_2^{-k_2}$$

5 with $\hat{c}_{02}^1(k_1, k_2)$'s given by (41) and

$$G_2(q^{-1}) = \frac{b^1(1) + b^1(2)q^{-1} + \dots + b^1(6)q^{-5}}{1 - a^1(2)q^{-1} - \dots - a^1(6)q^{-5}}$$

with $b^1(i)$'s and $a^1(i)$'s given by (45).

For the second filtering problem in this example

$$10 \quad G_1(q_1^{-1}, q_2^{-1}) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}^2(k_1, k_2) q_1^{-k_1} q_2^{-k_2}$$

with $\hat{c}_{02}^2(k_1, k_2)$'s given by (42) and

$$G_2(q^{-1}) = \frac{b^2(1) + b^2(2)q^{-1} + \dots + b^2(6)q^{-5}}{1 - a^2(2)q^{-1} - \dots - a^2(6)q^{-5}}$$

with $b^2(i)$'s and $a^2(i)$'s given by (46).

15 Referring to figures 10 and 11, there is shown the filtering effects of the filters designed to address the two filtering problems. Figure 10 shows the power spectrum densities of the output and input of the nonlinear filter which is finally obtained for the first filtering problem.

20 Figure 11 shows the power spectrum densities of the output and input of the nonlinear filter which is finally obtained for the second filtering problem. The effects of the filtering in the time domain of the two filters are shown in figures 12 and 13. All the responses indicate that the

25 filters substantially satisfy the design requirements.

II.2 DESIGN 2

Design No.2 illustrates the detailed procedure and several examples for designing a non-linear system for transferring the energy of a signal from a first predeterminable frequency or range of frequencies to a second predeterminable frequency or range of frequencies such that the output frequency response of the nonlinear system so designed is within specified bounds.

II.2.1 Detailed Procedure

(1) Given $u(t)$, the signal to be processed in the time or spatial domain, the frequency band $[c,d]$ to which the energy of $u(t)$ is to be transferred, and the user specified bound $Y^B(w)$ for the output spectrum $Y(jw)$ over $[c,d]$ for the design.

(2) Sample the time or spatial domain signal $u(t)$ with sampling interval T to yield a discrete series $\{u(k)\}$ and perform a Fast Fourier Transform (FFT) on the series to compute the spectrum $U(jw)$ of $u(t)$ as

$$U\left(j\frac{2\pi}{MT}l\right) = TU_d\left(j\frac{2\pi}{M}l\right), \quad l = -\left(\frac{M}{2}-1\right), \dots, 0, \dots, \frac{M}{2}$$

where $U_d[j(\cdot)]$ is the result of the FFT operating on $\{u(k)\}$ and M is the length of the data used to perform the FFT. M is taken as an even number for convenience.

(3) Evaluate the range $[a,b]$ of frequencies in $u(t)$ as

$$b = \frac{2\pi}{MT}l_b, \quad a = \frac{2\pi}{MT}l_a$$

where l_b is an integer such that

$$\left| U\left(j\frac{2\pi}{MT}l_b\right) \right| \geq 0.05, \quad \left| U\left(j\frac{2\pi}{MT}l\right) \right| < 0.05 \quad \text{for } l \in \left\{ (l_b+1), \dots, \frac{M}{2} \right\}$$

and l_a is an integer such that

$$\left| U\left(j\frac{2\pi}{MT}l_a\right) \right| \geq 0.05, \quad \left| U\left(j\frac{2\pi}{MT}l\right) \right| < 0.05 \quad \text{for } l \in \{0, \dots, (l_a-1)\}$$

- 5 (4) The relationship between the bound of the output spectrum $Y^B(w)$, the coefficients of the NARX model

$$y(k) = \sum_{n=1}^N y_n(k)$$

$$y_n(k) = \begin{cases} \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) & \text{for } n \geq 2 \\ \sum_{l_1=1}^{K_1} c_{10}(l_1) y(k-l_1) + \sum_{l_1=1}^{K_1} c_{01}(l_1) u(k-l_1) & \text{for } n=1 \end{cases}$$

- 10 and the spectrum $U(jw)$ is given by

$$\begin{aligned} Y^B(w) &= \frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jw l_1) \right|} \sum_{n=N_0}^N \frac{1}{(2\pi)^{(n-1)}} \left[\sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)| \right] \underbrace{|U| * \dots * |U(jw)|}_n \\ &= \frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jw l_1) \right|} \sum_{n=N_0}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U| * \dots * |U(jw)|}_n \end{aligned}$$

where

$$C_n = \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|, \quad n = N_0, \dots, N$$

- 15 are parameters associated with the NARX model parameters

$K_n, c_{0n}(l_1, \dots, l_n), l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n, \text{ for } n = N_0, \dots, N,$

$\underbrace{|U| * \dots * |U(jw)|}_n$ denotes the n -dimensional convolution

integration for the magnitude $|U(jw)|$ of the spectrum $U(jw)$, which is defined by

$$\underbrace{|U|^* \dots |U|}_{n} (j\omega) = \int_{-\infty}^{\infty} \dots \int_{-\infty}^{\infty} |U(j\omega_1)| \dots |U(j(\omega - \omega_1 - \dots - \omega_{n-1}))| d\omega_1 \dots d\omega_{n-1}$$

and $N_0 = 1$ when the NARX model involves nonlinear terms from order 1 to N .

5 Based upon this expression, the structure parameters N and N_0 and the NARX model parameters are determined as below.

(i) Evaluate

$$f_{x_n} = \begin{cases} \bigcup_{i=1}^{i^*-1} I_i & \text{when } \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] < 1 \\ \bigcup_{i=0}^{i^*} I_i & \text{when } \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] \geq 1 \end{cases}$$

10 where $[x]$ denotes the integer part of x ,

$$i^* = \left[\frac{na}{(a+b)} \right] + 1$$

$$I_i = [na - i(a+b), nb - i(a+b)], \quad \text{for } i = 0, \dots, i^* - 1$$

$$I_{i^*} = [0, nb - i^*(a+b)]$$

15 for $n=1, 2, \dots$ until a value of n is reached such that part of the specified output frequency range $[c, d]$ falls into f_{x_n} . This value of n is used as the value of N_0 .

(ii) Evaluate

$$f_y = f_{x_n} \cup f_{x_{n-1}}$$

20 for $n=2, 3, \dots$ until a value of n is reached such that the frequency range $[c, d]$ falls completely within the corresponding f_y . This value of n is taken as the value of N .

(iii) Calculate

25
$$\underbrace{|U|^* \dots |U|}_{n} (j\omega)$$

to yield

$$\underbrace{|U|^* \dots |U|}_{n} (j 2\pi i / MT), \quad \text{for } i = 0, \dots, M/2$$

using the algorithm

$$\left\{ \begin{array}{l} \underbrace{|U|^* \dots |U|}_{n} (j 2\pi i / MT) = T \tilde{U} \left[i + \left(\frac{M}{2} - 1 \right) n \right] \left(\frac{2\pi}{M} \right)^{(n-1)} \quad i = 0, \dots, \frac{M}{2} \\ \left\{ \tilde{U}(0), \dots, \tilde{U}[n(M-1)] \right\} = \text{Conv} \left\{ \underbrace{\left[\tilde{U}(0), \dots, \tilde{U}(M-1) \right], \dots, \left[\tilde{U}(0), \dots, \tilde{U}(M-1) \right]}_n \right\}, \\ \tilde{U}(i) = \left| U_d \left[j \frac{2\pi}{M} \left(i - \frac{M}{2} + 1 \right) \right] \right|, \quad i = 0, 1, \dots, M-1 \end{array} \right.$$

5 for $n = N_0, \dots, N$, where $\text{Conv}(\cdot)$ denotes the convolution operation and $\tilde{U}(\cdot)$ and $\tilde{\tilde{U}}(\cdot)$ represent the intermediate results of this algorithm.

(iv) Based on the $(i_d - i_c + 1)$ equations

$$Y^{B*} \left(\frac{2\pi}{MT} i \right) = \sum_{n=N_0}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U|^* \dots |U|}_{n} \left[j \left(\frac{2\pi i}{MT} \right) \right] \quad i = i_c, i_c + 1, \dots, i_d$$

10 where $i_c = \text{round} \left[\frac{cMT}{2\pi} \right]$, $i_d = \text{round} \left[\frac{dMT}{2\pi} \right]$, and $\text{round}(x)$ means to take the integer nearest to x , use a least squares routine to compute

$$C_n, \quad n = N_0, \dots, N,$$

15 under the constraint that the results must be positive, and then select the NARX model parameters

$$K_n, c_{0n}(l_1, \dots, l_n), \quad l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n \\ \text{for } n = N_0, \dots, N$$

under the constraints on the summation of the modulus of the coefficients given by

$$20 \quad C_n = \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|, \quad n = N_0, \dots, N$$

(v) If necessary, design a classical linear filter, for example, a band pass filter which ideally allows the frequency response to be unity over the frequency

band $[c,d]$ and zero beyond to yield the linear frequency characteristic

$$\frac{1}{\left[1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-j\omega l_1)\right]}$$

and therefore determine the parameters associated with K_1 , $c_{10}(l_1)$, $l_1=1, \dots, K_1$. Otherwise, all of the parameters of $c_{10}(\cdot)$ can be taken as zero to yield a model having no regression terms associated with the output.

- (5) Construct a NARX model as shown in figure (14) using the results obtained in the above (iv) and (v). The nonlinear system illustrated in figure 14 comprises a nonlinear part 1400 and a linear part 1402. It will be appreciated that in figure 14

$$\sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) = \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i)$$

II.2.2 Three Specific Examples

Example 1

- This example illustrates a further implementation or design of a nonlinear system following the above detailed procedure.

(1) The signal to be processed is given by

$$u(t) = 2M_u \frac{1}{2\pi} \frac{\sin \alpha t - \sin \beta t}{t}$$

with $\alpha = 3.3$, $\beta = 1$, and $M_u = 1.6$. The frequency spectrum $U(j\omega)$ of the signal is shown in figure 15 indicating that the real input frequency range is $[1, 3.3]$. The requirement for the design is to transfer energy of the original signal to the frequency band $[c, d] = [5.6, 7.6]$ with the bound on the output spectrum magnitude specified to be $Y^{B*}(\omega) = 1.6$ over this frequency band.

(2) Sample $u(t)$ with sampling interval $T = 0.01$ sec to produce

$$u(k) = 2M_u \frac{1}{2\pi} \frac{\sin \alpha kT - \sin \beta kT}{kT} = 2 \times 1.6 \times \frac{1}{2\pi} \times \frac{\sin 3.3 \times 0.01k - \sin 0.01k}{0.01k}$$

$$k = -1999, \dots, 0, \dots, 2000$$

and perform a Fast Fourier Transform (FFT) on this series ($M = 4000$) to compute

$$U_d\left(j\frac{2\pi}{M}l\right) = U_d\left(j\frac{2\pi}{4000}l\right) \quad l = -1999, \dots, 0, \dots, 2000$$

and then to yield

$$U\left(j\frac{2\pi}{MT}l\right) = U\left(j\frac{2\pi}{4000 \times 0.01}l\right) = 0.01 U_d\left(j\frac{2\pi}{4000}l\right) \quad l = -1999, \dots, 0, \dots, 2000$$

the result of which, in the nonnegative frequency range, is shown in figure 16.

Notice the difference between the real spectrum of $u(t)$ in figure 15 and the computed spectrum in figure 16. The differences are due to the errors caused by the FFT operation. The design should and will be performed based upon the computed spectrum to lead to more practical results.

- (3) Evaluate the frequency range $[a,b]$ of $u(t)$ from the computed spectrum giving

$$a=0.6283 \quad b=3.7699$$

- (4) Design the system structure and parameters

- 5 (i) Determination of N_0 .

Clearly, the output frequency range contributed by the linear part when the input frequencies are within $[a,b]=[0.6283, 3.7699]$ is

$$f_{x_1}=[a,b]=[0.6283, 3.7699]$$

- 10 The frequency range f_{x_2} produced by the second order nonlinearity in this case is obtained as follows.

Since $n=2$,

$$15 \quad \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] = \frac{2 \times 3.7699}{(3.7699+0.6283)} - \left[\frac{2 \times 0.6283}{(3.7699+0.6283)} \right] \\ = 1.7143 - [0.2857] = 1.7143 - 0 > 1$$

and

$$i^* = \left[\frac{na}{(a+b)} \right] + 1 = \left[\frac{2 \times 0.6283}{3.7699+0.6283} \right] + 1 = [0.2857] + 1 = 0 + 1 = 1$$

So

$$f_{x_2} = \bigcup_{i=0}^{i^*} \left\{ \bigcup_{i=0}^{i^*-1} [na-i(a+b), nb-i(a+b)] \right\} \cup [0, nb-i^*(a+b)] \\ = [na, nb] \cup [0, nb-(a+b)] = [2 \times 0.6283, 2 \times 3.7699] \cup [0, 2 \times 3.7699 - (0.6283 + 3.7699)] \\ 20 \quad = [1.2566, 7.5398] \cup [0, 3.1416] = [0, 7.5398]$$

f_{x_2} thereby obtained contains part of the specified output frequency range $[c,d]=[5.6, 7.6]$. So, N_0 is determined to be $N_0=2$.

- (ii) Determination of N .

Evaluating $f_y = f_{y_n} \cup f_{y_{n-1}}$ for $n=2$ yields

$$f_y|_{n=2} = f_{y_2} \cup f_{y_1} = [0, 7.5398] \cup [0.6283, 3.7699] = [0, 7.5398]$$

To evaluate $f_y|_{n=3} = f_{y_3} \cup f_{y_2}$, calculate f_{y_3} first. In this case

$$\frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] = \frac{3 \times 3.7699}{(3.7699 + 0.6283)} - \left[\frac{3 \times 0.6283}{(3.7699 + 0.6283)} \right] \\ = 2.5714 - [0.4286] = 2.5714 - 0 > 1$$

$$i^* = \left[\frac{na}{(a+b)} \right] + 1 = \left[\frac{3 \times 0.6283}{3.7699 + 0.6283} \right] + 1 = [0.4286] + 1 = 0 + 1 = 1$$

So

$$f_{y_3} = \bigcup_{i=0}^{i^*} I_i = I_0 \cup I_1 = [na, nb] \cup [0, nb - (a+b)] \\ = [3 \times 0.6283, 3 \times 3.7699] \cup [0, 3 \times 3.7699 - (0.6283 + 3.7699)] \\ = [1.8848, 11.3097] \cup [0, 6.9115] = [0, 11.3097]$$

Therefore

$$f_y|_{n=3} = f_{y_3} \cup f_{y_2} = [0, 7.5398] \cup [0, 11.3097] = [0, 11.3097]$$

$f_y|_{n=3}$ thereby obtained includes the whole specified output frequency range $[5.6, 7.6]$. N is therefore determined to be $N=3$.

(iii) Calculate $\underbrace{|U|^* \dots |U|}_{n}(j\omega)$ for $n=N_0=2$ and $n=N=3$, respectively to yield

$$\underbrace{|U|^* \dots |U|}_{n}(j2\pi i/MT) = \underbrace{|U|^* \dots |U|}_{n}(j2\pi i/4000 \times 0.01) \quad i=0, \dots, 4000/2, n=2 \text{ and } 3$$

The results are shown in figure 17.

(iv) Based on the $(i_d - i_c + 1)$ equations

$$Y^{B*}(\pi i/2000 \times 0.01) = 1.6 = \frac{1}{2\pi} C_2 |U|^* |U(j\pi i/2000 \times 0.01)| \\ + \frac{1}{(2\pi)^2} C_3 |U|^* |U|^* |U(j\pi i/2000 \times 0.01)|$$

$$i = i_c, i_{c+1}, \dots, i_{d-1}, i_d$$

with

$$i_c = \text{round}[cMT/2\pi] = \text{round}[5.6 \times 4000 \times 0.01/2 \times \pi] = 36$$

$$i_d = \text{round}[dMT/2\pi] = \text{round}[7.6 \times 4000 \times 0.01/2 \times \pi] = 48$$

use a least squares routine under the constraint of nonnegative solutions to compute C_2 and C_3 , that is, to determine C_2 and C_3 , under the constraints of $C_2 \geq 0$ and $C_3 \geq 0$, to minimise the following expression

$$\sum_{i=1}^{i_d} \left[1.6 - \frac{1}{2\pi} C_2 |U * U(j\pi i/2000 \times 0.01)| - \frac{1}{(2\pi)^2} C_3 |U * U * U(j\pi i/2000 \times 0.01)| \right]^2$$

The results obtained are

$$C_2 = 0 \quad \text{and} \quad C_3 = 3.8367$$

- (v) Design, optionally, a linear Butterworth band pass filter to attenuate the frequency components beyond the frequency band $[c, d] = [5.6, 7.6]$ to yield the linear frequency characteristic

$$\frac{10^{-3}(0.0986 - 0.1972q^{-2} + 0.0986q^{-4})}{1 - 3.9633q^{-1} + 5.8988q^{-2} - 3.9076q^{-3} + 0.9721q^{-4}} \Big|_{q=e^{j\omega}}$$

(5) Construct a NARX model as shown in figure 14 with

$$N_0 = 2, N = 3, K_2 = K_3 = 1, c_{02}(1,1) = 0, c_{03}(1,1,1) = 3.8367,$$

that is,

$$\begin{aligned} \sum_{n=N_0}^N \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) &= \sum_{l_1=1}^{K_2} \sum_{l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \\ &\quad \sum_{l_1=1}^{K_3} \sum_{l_2=1}^{K_3} \sum_{l_3=1}^{K_3} c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= \sum_{l_1=1}^1 \sum_{l_2=1}^1 c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \\ &\quad \sum_{l_1=1}^1 \sum_{l_2=1}^1 \sum_{l_3=1}^1 c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= c_{02}(1,1) u^2(k-1) + c_{03}(1,1,1) u^3(k-1) = 0 \times u^2(k-1) + 3.8367 u^3(k-1) = 3.8367 u^3(k-1) \end{aligned}$$

and

$$\left[1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) q^{-1} \right]^{-1} = \frac{10^{-3} (0.0986 - 0.1972q^{-2} + 0.0986q^{-4})}{1 - 3.9633q^{-1} + 5.8988q^{-2} - 3.9076q^{-3} + 0.9721q^{-4}}$$

which determines the parameters associated with the NARX

10 model parameters K_1 and $c_{10}(l_1)$, $l_1 = 1, \dots, K_1$.

The output frequency response under the given input is shown in figure 18 indicating that the energy has been transferred to the specified frequency band $[c, d] = [5.6, 7.6]$ with the magnitude of the response below the specified bound 1.6.

The frequency response of the above design is examined for other input signals below.

In the first case, consider

$$u(t) = \frac{2M_u}{\pi(b-a)t^2} \left[2\cos\frac{(a+b)t}{2} - \cos bt - \cos at \right]$$

where a , b , and M_u are defined as above. The frequency spectrum of the signal is shown in figure 19. The frequency range is clearly the same as that of the signal having the spectrum given in figure 15 and the magnitude of the spectrum also satisfies the condition that

$$|U(j\omega)| \leq M_u = 1.6$$

This implies that the frequency response of the designed system to this $u(t)$ should in theory also transfer energy into the frequency band $[c, d] = [5.6, 7.6]$ with the output magnitude frequency response being less than $Y^{B*}(\omega) = 1.6$ over this frequency band. Figure 20 shows this frequency response and indicates that the actual result is consistent with the theoretical predictions.

For the second case, $u(t)$ was taken as a random process with the frequency spectrum given in figure 21. The frequency spectrum is substantially within the frequency range $[1, 3, 3]$ with a magnitude of less than 1.6. Therefore, the same conclusion should apply for the output magnitude frequency response of the designed system to this random input. Figure 22 shows this response and indicates that the energy is transferred to a new frequency band of substantially $[5.6, 7.6]$. Note that the magnitude of the output spectrum over this frequency band is well below the specified bound $Y^{B*}(\omega) = 1.6$. This is because of the effect of the attenuation which is due to intrakernel interference of the nonlinear mechanism.

The nonlinear filter which has been designed above can be represented by the block diagram shown in figure 23. This

could be realised electronically by following the approach used to realise Design 1 in figure 9. However, for some applications the design may need to be realised in continuous time. Using the bilinear transformation

$$q = \frac{1 + (T/2)s}{1 - (T/2)s}$$

where $T=0.01$ is the sampling interval, q^{-1} is the delay operator, and s is the Laplace Transform operator and substituting in the discrete time design in figure 23 provides the equivalent continuous time system shown in figure 24. Simulating the system in figure 24 produces almost identical responses as the discrete time system response of figure 18.

The system in figure 24 could for example be realised mechanically as illustrated schematically in figure 25 where the cubic device is either a material which exhibits a cubic response or is implemented as an actuator which takes $u_1(t)$ as input and produces an actuation output $u_2(t)$ which is proportional to the cubic power of the input.

One possible application of this design would be in vibration isolation. For example it may be required to transfer energy from an input frequency range $[1, 3.3]$ to the frequency range $[5.6, 7.6]$. The new design could be used to achieve this effect.

Other much more complicated designs for vibration isolation can be achieved based on the present invention. The design procedure would be exactly as described above, but the realisation would involve the synthesis of dampers, damping materials or actuators with the nonlinear dynamic characteristics specified by the designs.

Example 2

Example 2 shows an application of the design above to the attenuation of signal energy over unwanted frequency bands using designed nonlinear effects.

When using linear structures for the attenuation of signal energy in a physical system, the attenuated energy is usually absorbed by devices such as dampers in mechanical systems and resistors in electronic circuits and transformed to other energy forms such as thermal energy. This may lead to undesirable effects and measures, such as using radiating devices, sometimes have to be taken to compensate for these effects. When a nonlinear system is employed, instead of attenuating the signal energy directly as in the linear case, the signal energy at a frequency of interest can be spread over a wider frequency band and attenuated by means of the counteractions between different terms which compose the output spectrum. This means that, to a certain extent, a nonlinear design for signal energy attenuation can reduce the requirements for using energy absorption devices and is of great benefit in practical applications.

Another important application would be, for example, in the design of the foundations or the modification of the characteristics of buildings and structures which are in earthquake zones. The objective in such an application would be to design materials or actuators, tuned as required for each structure, which transfer the damaging input energy from an earthquake to another more acceptable frequency band or spread the energy to be within an acceptable bound over a desired frequency range. Spreading the energy using the present design should produce significant reductions in earthquake damage.

- (1) Design a nonlinear system to attenuate the energy of the signal

$$u(t) = \frac{2M_u}{\pi(a-b)t^2} \left[2\cos\left(\frac{a+b}{2}t\right) - \cos a t - \cos b t \right]$$

where $a=3.3$, $b=1$, $M_u=1.6$.

- (2) The spectrum of the signal is evaluated. This is implemented by sampling the signal with sampling interval $T=0.01\text{sec}$ to produce

$$u(k) = \frac{2M_u}{\pi(\alpha - \beta)(kT)^2} \left[2\cos\left(\frac{\alpha + \beta}{2}kT\right) - \cos \alpha kT - \cos \beta kT \right]$$

$$k = -1999, \dots, 0, \dots, 2000$$

and perform a Fast Fourier Transform (FFT) on this series. The result of the FFT is shown in figure 26.

- (3) Evaluate the range $[a,b]$ of frequencies in the signal based on the computed spectrum. The evaluation gives

$$a=1.0996 \quad b=3.1416$$

This is because the computed spectrum indicates

$$|U(jw)| \geq 0.05 \quad \text{for } w \in [1.0996, 3.1416]$$

and

$$|U(jw)| < 0.05 \quad \text{for other } w$$

- (4) Assume that, as part of the design, output frequency range is $[c,d]=[0, 7.3]$ and the required bound over this frequency band is $Y^{B^*}(w)=1$.

- (5) Following the same steps for the design of the system structure and parameters as in example 1 above, N_0 , N , and C_n , $n=N_0, \dots, N$ were determined as follows.

(i) N_0

N_0 is determined to be $N_0=1$. This is because

$$f_{v_1} = [a,b] = [1.0996, 3.1416] \in [0, 7.3] = [c, d]$$

where f_{v_1} denotes the output frequency band contributed by the system linear part, and part of the selected output frequency range falls into the linear output frequency range f_{v_1} .

(ii) N

In this case, it can be obtained using $a=1.0990$ and $b=3.1416$ that

$$f_{y_2} = [2.1992, 6.2832] \cup [0, 2.0420]$$

$$f_{y_3} = [0, 9.4248]$$

Thus, if the maximum nonlinear order is taken to be 2, then the output frequency range of the system is

$$f_{y|n=2} = f_{y_2} \cup f_{y_1} = [0, 6.2832]$$

If the maximum order is taken to be 3, then the output frequency range

$$f_{y|n=3} = f_{y_3} \cup f_{y_2} = [0, 9.4248]$$

Clearly, $f_{y|n=3}$ contains the whole selected output frequency range $[c,d]=[0,7.3]$, N is therefore determined to be $N=3$.

(iii) C_n , $n=1,2,3$.

C_n , $n=1,2,3$. are determined to minimize the following expression

$$\sum_{i=i_c}^{i_d} \left[1 - C_1 |U(j2\pi i/MT)| - \frac{1}{2\pi} C_2 |U * U(j2\pi i/MT)| - \frac{1}{(2\pi)^2} C_3 |U * U * U(j2\pi i/MT)| \right]^2$$

under the constraints of $C_i \geq 0$, $i=1,2,3$.

Notice that for this specific example,

$$M = 4000$$

$$i_c = \text{round} \left[\frac{cMT}{2\pi} \right] = \text{round} \left[\frac{0 \times 4000 \times 0.01}{2\pi} \right] = 0$$

$$i_d = \text{round} \left[\frac{dMT}{2\pi} \right] = \text{round} \left[\frac{7.6 \times 4000 \times 0.01}{2\pi} \right] = 48$$

The solution to this minimisation problem is

$$C_1 = 0, C_2 = 2.1932, C_3 = 6.0550$$

(6) Select the NARX model parameters

$$K_n, c_{0n}(l_1, \dots, l_n), \quad l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n, \quad \text{for} \\ n = N_0, \dots, N,$$

based on the results obtained in (5) as

$$K_1 = K_2 = K_3 = 2$$

$$c_{01}(\cdot) = 0,$$

$$c_{02}(1,1) = 1.1932, \quad c_{02}(1,2) = c_{02}(2,1) = 0, \quad c_{02}(2,2) = -1,$$

$c_{03}(1,1,1) = 3.0550$, $c_{03}(2,2,2) = -3$, and other $c_{03}(\cdot)$'s are zero and consequently construct a NARX model as

$$\begin{aligned} y(k) &= \sum_{n=N_0}^N \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) = \sum_{l_1=1}^{K_1} c_{01}(l_1) u(k-l_1) + \\ &\quad \sum_{l_1=1}^{K_2} \sum_{l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \sum_{l_1=1}^{K_3} \sum_{l_2=1}^{K_3} \sum_{l_3=1}^{K_3} c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= \sum_{l_1=1}^2 c_{01}(l_1) u(k-l_1) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 \sum_{l_3=1}^2 c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= c_{02}(1,1) u^2(k-1) + c_{02}(2,2) u^2(k-2) + c_{03}(1,1,1) u^3(k-1) + c_{03}(2,2,2) u^3(k-2) \\ &= 1.1932 u^2(k-1) - u^2(k-2) + 3.0550 u^3(k-1) - 3 u^3(k-2) \end{aligned}$$

Notice that the selected NARX model parameters satisfy the relationship

$$\sum_{l_1=1}^{K_1} |c_{01}(l_1)| = 0 = C_1$$

$$\sum_{l_1=1}^{K_2} \sum_{l_2=1}^{K_2} |c_{02}(l_1, l_2)| = |c_{02}(1,1)| + |c_{02}(2,2)| = |1.1932| + |-1| = 2.1932 = C_2$$

$$\sum_{l_1=1}^{K_3} \sum_{l_2=1}^{K_3} \sum_{l_3=1}^{K_3} |c_{03}(l_1, l_2, l_3)| = |c_{03}(1,1,1)| + |c_{03}(2,2,2)| = |3.0550| + |-3| = 6.0550 = C_3$$

and the different signs selected for

$$c_{02}(1,1) \text{ and } c_{02}(2,2)$$

and for

$$c_{03}(1,1,1) \text{ and } c_{03}(2,2,2)$$

are such as to give effect to the intra-kernel and inter-kernel interferences, which is to attenuate the energy of the input signal.

The frequency domain response of the constructed model to the sampled series of the input signal is shown in figure 27. It can be seen that excellent energy attenuation has been achieved by the designed system. It will be appreciated that the input energy in figure 26 has been spread over the designed frequency band by the nonlinear filter.

Example 3

This example shows another application of the present invention to the attenuation of signal energy over unwanted frequency bands using designed nonlinear effects. The example also illustrates the effect of the same design on a different input signal to demonstrate the effectiveness in energy attenuation of the designed system in different circumstances.

- (1) Design a nonlinear system to attenuate the energy of the signal

$$u(t) = 2M_u \frac{1}{2\pi} \frac{\sin \alpha t - \sin \beta t}{t}$$

with $\alpha = 3.3$, $\beta = 1$, and $M_u = 1.6$.

- (2) The spectrum of the signal is evaluated by sampling the signal with sampling interval $T = 0.01$ sec to produce

$$u(k) = 2M_u \frac{1}{2\pi} \frac{\sin \alpha kT - \sin \beta kT}{kT} = 2 \times 1.6 \times \frac{1}{2\pi} \times \frac{\sin 3.3 \times 0.01k - \sin 0.01k}{0.01k}$$

$$k = -1999, \dots, 0, \dots, 2000$$

and then performing a Fast Fourier Transform (FFT) on the obtained time series. The result of the FFT is the same as that shown in figure 16.

- (3) Evaluating the range $[a,b]$ of frequencies in the signal based on the computed spectrum gives

$$a=0.6283 \quad b=3.7699$$

as the computed spectrum indicates

$$|U(jw)| \geq 0.05 \quad \text{for } w \in [0.6283, 3.7699]$$

and

$$|U(jw)| < 0.05 \quad \text{for other } w.$$

- (4) Assume that, as part of the design, it is desired that the output frequency range is $[c,d]=[0,10.3]$ and the required bound over this frequency range is $Y^{B*}(w)=1$.

- (5) Following the same steps for the design of the system structure and parameters as in example 1 above, the parameters N_0 , N , and C_n , $n=N_0, \dots, N$ are determined as follows.

(i) N_0

N_0 is determined to be $N_0=1$ due to

$$f_{x_1} = [a,b] = [0.6283, 3.7699] \in [0, 10.3] = [c, d],$$

which indicates that part of the selected output frequency range falls into the linear output frequency range f_{x_1} .

(ii) N

In this example, N is obtained using $a=0.6283$ and $b=3.7699$. Therefore,

$$f_{x_2} = [0, 7.5398]$$

$$f_{x_3} = [0, 11.3097].$$

Hence, if the maximum nonlinear order is taken to be 2, the output frequency range of the system is

$$f_{y|n=2} = f_{x_2} \cup f_{x_1} = [0, 7.5398].$$

If the maximum order is taken to be 3, the output frequency range

$$f_{y|n=3} = f_{x_3} \cup f_{x_2} = [0, 11.3097].$$

As $f_{Y|n=3}$ contains the whole selected output frequency range $[c,d]=[0,7.6]$, N , for the design, is determined to be $N=3$.

5 (iii) C_n , $n=1,2,3$

C_n , $n=1,2,3$ are determined in such a manner as to minimise

$$\sum_{i=1}^3 \left[1 - C_i |U(j2\pi i/MT)| - \frac{1}{2\pi} C_2 |U^* |U(j2\pi i/MT)| - \frac{1}{(2\pi)^2} C_3 |U^* |U^* |U(j2\pi i/MT)| \right]^2$$

10 under the constraints of $C_i \geq 0$, $i=1,2,3$. In this case also $M=4000$ but

$$i_c = \text{round} \left[\frac{cMT}{2\pi} \right] = \text{round} \left[\frac{0 \times 4000 \times 0.01}{2\pi} \right] = 0$$

$$i_d = \text{round} \left[\frac{dMT}{2\pi} \right] = \text{round} \left[\frac{10.3 \times 4000 \times 0.01}{2\pi} \right] = 66$$

The solution to this minimisation problem is

$$C_1 = 0, C_2 = 0.2928, C_3 = 0.9763$$

(6) The NARX model parameters

15 $K_n, c_{0n}(l_1, \dots, l_n)$, $l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n$, for $n = N_0, \dots, N$, are selected based on the results obtained in (5) as

$$K_1 = K_2 = K_3 = 2$$

$$c_{01}(\cdot) = 0$$

$$c_{02}(1,1)=0.1928, c_{02}(1,2)=-0.1, c_{02}(2,1)=0, c_{02}(2,2)=0,$$

$$c_{03}(1,1,1)=0.6763, c_{03}(1,2,2)=-0.3, \text{ and other } c_{03}(\cdot) \text{'s are zero.}$$

and consequently a NARX model is constructed

$$20 \quad y(k) = \sum_{n=N_0}^N \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i)$$

$$= \sum_{l_1=1}^2 c_{01}(l_1) u(k-l_1) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 \sum_{l_3=1}^2 c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i)$$

$$= c_{02}(1,1) u^2(k-1) + c_{02}(1,2) u(k-1) u(k-2) + c_{03}(1,1,1) u^3(k-1)$$

$$+ c_{03}(1,2,2) u(k-1) u^2(k-2)$$

$$= 0.1928 u^2(k-1) - 0.1 u(k-1) u(k-2) + 0.6763 u^3(k-1) - 0.3 u(k-1) u^2(k-2)$$

The selected NARX model parameters satisfy the relationships

$$\sum_{l_1=1}^{K_1} |c_{01}(l_1)| = 0 = C_1$$

$$\sum_{l_1=1}^{K_2} \sum_{l_2=1}^{K_2} |c_{02}(l_1, l_2)| = |c_{02}(1, 1)| + |c_{02}(1, 2)| = |0.1928| + |-0.1| = 0.2928 = C_2$$

$$5 \quad \sum_{l_1=1}^{K_3} \sum_{l_2=1}^{K_3} \sum_{l_3=1}^{K_3} |c_{03}(l_1, l_2, l_3)| = |c_{03}(1, 1, 1)| + |c_{03}(1, 2, 2)| = |0.6763| + |-0.3| = 0.9763 = C_3$$

and the different signs selected for

$c_{02}(1, 1)$ and $c_{02}(1, 2)$

and for

$c_{03}(1, 1, 1)$ and $c_{03}(1, 2, 2)$

10 are in order to give effect to the intra-kernel and inter-kernel interferences, which is to attenuate the energy of the input signal.

15 The frequency response of the constructed model to the input signal specified above is shown in figure 28 which indicates that the required energy attenuation has been realised.

20 The frequency response of the design above to the input signal in example 2 gives the result shown in figure 29. The nonlinear system design above clearly also works for the signal in example 2 in energy attenuation although the model was not specially designed for this signal. This is reasonable since the magnitude of the spectrum of the signal in example 2 is less than the magnitude of the spectrum of the signal in this example over almost all of the input frequency band and over the other frequency bands the magnitudes of the spectra of the two signals are all zero. This illustrates that the above design is effective not only 25 for the input based on which the design is implemented but also for other inputs with magnitude frequency characteristics less than the magnitude of the spectrum of the considered input. 30

III. FLOWCHARTS

Referring to figure 30, there is shown a flow chart 3000 depicting the steps of an embodiment of the present invention in which the output spectrum is specified over a given range of output frequencies.

The signal to be processed and the desired frequency response of the non-linear system to be designed are input via steps 3002 to 3006.

At step 3002, a digital input signal $\{u(k)\}$ and its sampling interval T are to be provided. The range of output frequencies $[c,d]$ over which the energy of the input signal is to be transformed is given in step 3004. The output frequency range is specified using beginning and end frequencies c and d respectively. The distribution of the energy over the output frequency range $[c,d]$ is requested or specified in step 3006.

20

The frequency characteristics of the input signal are determined at steps 3008 and 3010. More particularly, the frequency components of the digitised input signal, $\{u(k)\}$, are calculated using a Fast Fourier Transform at step 3008. The range of frequency components contained within the input signal is determined from the FFT at step 3010.

Referring to steps 3012 to 3024, the orders of the nonlinearities required to realise a desired nonlinear system and, hence, the energy transformation, are calculated.

Variables n and N_0 are set to one and zero respectively at step 3012. The output frequency components resulting from the n th-order of system nonlinearities are determined at steps 3014 and 3016.

5

A determination is made at step 3018 as to whether or not $N_0=0$, that is to say, whether or not the smallest order of system nonlinearities which makes a contribution to the desired energy transformation has been determined. If N_0 is equal to zero, a determination is made at step 3020 as to whether or not part of the specified output frequency range falls within f_{Yn} . If the determination is negative, processing continues at step 3026 at which the value of n is increased by one. However, if the determination is positive, the value of N_0 is set to equal n at step 3022 and processing continues at step 3026.

If N_0 is not equal to zero, then a determination is made at step 3024 as to whether or not the specified output frequency range lies completely within $f_Y = f_{Yn} \cup f_{Yn-1}$. If the determination is positive, processing continues with step 3027. However, if the determination is negative, the value of n is incremented by one at step 3026 and processing continues at step 3014.

25

Steps 3028 to 3034 determine the values of the lags of the nonlinear model for all values of $n = N_0, N_{0+1}, \dots, N$ and determine the parameters of the nonlinear system to be designed.

30

Step 3036 represents a step for fine tuning of the output or frequency response of the designed non-linear system.

Steps 3038 and 3040 determine whether or not the resulting frequency response is sufficient to meet the design requirements. If the frequency response of the designed filter is acceptable, the discrete version of the filter is output at step 3042. However, if the designed non-linear system does not have an acceptable frequency response, then step 3044 increments the value of K_n by one for all $n = N_0, N_0+1, \dots, N$ and steps 3030 to 3040 are iteratively repeated.

10

The determination in step 3040 as to whether or not the designed filter is acceptable is made, for example, by calculating the difference between the required output spectrum and the real output spectrum of the designed system over the frequency band $[c,d]$. If the modulus of the difference is below a predeterminable threshold over all the output frequency band $[c,d]$, then the designed nonlinear system may be deemed to be acceptable. However, if the modulus of the difference is greater than the threshold at any frequency over $[c,d]$, then the design is refined.

20

Referring to figure 31, there is shown a flow chart 3100 for implementing computer code according to a second embodiment of the present invention.

25

The signal to be processed and the specification for the desired bound to be imposed upon the output signal frequency characteristics is input at steps 3102 to 3106.

30

At step 3102, a digitised input signal and its sampling interval T are to be provided. The range of output frequencies $[c,d]$ over which the energy of the input signal is to be transformed is specified in step 3104. A bound

$y_B^*(w)$ for the distribution of the energy over the output frequency band $[c,d]$ is input at step 3106.

5 The frequency characteristics of the input signal are determined at step 3108 and 3110. More particularly, the frequency components of the digitised input signal, $\{u(k)\}$, are calculated using a Fast Fourier Transform at step 3108. The range of frequency components contained within the input signal is determined from the FFT at step 3110.

10

Referring to steps 3112 to 3124, the orders of the nonlinearities required to realise a desired nonlinear system and, hence, the energy transformation, are calculated.

15

Variables n and N_0 are set to one and zero respectively at step 3112. The frequency components resulting from the n th-order of system nonlinearities are determined at steps 3114 and 3116.

20

A determination is made at step 3118 as to whether or not $N_0 = 0$, that is to say, whether or not the smallest order of system nonlinearities which contributes to the desired energy transformation has been determined. If N_0 is
25 equal to zero, a determination is made at step 3120 as to whether or not part of the specified output frequency range falls within f_{yn} . If the determination is negative, processing continues at step 3126 in which the value of n is increased by one. However, if the determination is
30 positive, the value of N_0 is set to equal n at step 3122 and processing continues at step 3126.

If, at step 3118, it is determined that N_0 is not equal to zero, then a determination is made at step 3124 as to whether or not the specified output frequency range lies completely within $f_y = f_{yN} \cup f_{yN-1}$. If the determination is positive, processing continues with step 3127. However, if the determination is negative, the value of n is incremented by one at step 3126 and processing continues at step 3114.

Steps 3128 to 3134 determine the values C_n for all values of $n = N_0, N_{0+1}, \dots, N$, which represents the summation of the modulus of the values of the parameters of the nonlinear system.

At step 3136 the parameters of a NARX model are selected given the constraints imposed upon the non-linear system obtained in steps 3128 to 3134. A determination is made via steps 3138 and 3140 as to whether or not the frequency response beyond the frequency band $[c,d]$ of the designed filter is acceptable. If the frequency response is acceptable, the filter design parameters are output at step 3142. However, if the filter characteristics are not acceptable at frequencies outside the frequency range $[c,d]$, then a conventional filter, $H(q^{-1})$, is designed, at step 3144, in order to reduce or obviate the frequency response of the designed filter outside the range of frequencies $[c,d]$. Finally, the design is completed at step 3146 by combining the designed non-linear and linear filters, if any.

The determination in step 3140 as to whether or not the frequency response of the designed filter is acceptable outside the range of frequencies $[c,d]$ is made, for example, by comparing the modulus of the frequency response beyond the frequency range $[c,d]$ with a predeterminable threshold.

If the modulus is below the threshold over all the frequency range outside $[c,d]$, then the designed nonlinear system may be deemed to be acceptable. However, if the modulus is greater than the threshold at any frequency beyond $[c,d]$,
5 the design is refined.

IV. THREE MORE DESIGNS AND EXAMPLES

IV.1 DESIGN OF NONLINEAR FILTERS WITH SPECIFICATIONS FOR BOTH THE MAGNITUDE AND PHASE OF OUTPUT FREQUENCY RESPONSES

5

It will be appreciated that the basic principles of the present invention can be applied to the design of nonlinear filters based on specifications for both the magnitude and phase of output frequency responses. The ability to
10 modulate phase as well as or instead of magnitude is of particular importance in telecommunication applications.

Consider a filtering problem such that given an input spectrum $U(j\omega)$ over a frequency band $[a,b]$ and a desired output spectrum $Y^*(j\omega)$ over another frequency band $[c,d]$, a
15 filter is required to be designed so that the output frequency response $Y(j\omega)$ can match the desired spectrum $Y^*(j\omega)$ as closely as possible in terms of both magnitude and phase characteristics. The basic principles in Section I can be directly applied to realise the design of such a filter.
20 The procedure to be followed is described below.

First, a nonlinear filter

$$y_1(t) = N[u(t)]$$

is designed using the basic principles described in Steps (i)—(iv) and (v.1) Part 1 in Section I to produce a
25 frequency response $Y_1(j\omega)$ such that $Y_1(j\omega)$ can match $Y_1^*(j\omega)$ over the specified output frequency range $[c,d]$ as closely as possible in terms of both the magnitude and phase.

Secondly, if required, design a linear filter with a frequency response function $H_1(j\omega)$ such that, ideally,

$$30 \quad H_1(j\omega) = \frac{Y^*(j\omega)}{Y_1(j\omega)} \quad \omega \in [c,d]$$

This can be used to improve $Y_1(jw)$, the result obtained from the nonlinear design, so that the frequency response of the corresponding output

$$Y_2(jw) = H_1(jw)Y_1(jw)$$

5 provides a better match to the desired spectrum $Y_1^*(jw)$.

Thirdly, if required, design a linear phase FIR (Finite Impulse Response) band pass filter $H_2(jw)$ with the ideal magnitude frequency characteristic

$$|H_2(jw)| = \begin{cases} 1 & w \in [c, d] \\ 0 & \text{otherwise} \end{cases}$$

10 and a linear phase over the frequency range. Then construct the designed filter using linear filters $H_1(jw)$ and $H_2(jw)$ and nonlinear filter $N[u(t)]$ as shown in figure 32 to yield the output frequency response

$$Y(jw) = H_2(jw)Y_2(jw)$$

15 The second and third steps above follow the design principle described in Step (v.1) Part 2 in Section I so as to augment the performance of the nonlinear filter $Y_1(t) = N[u(t)]$ designed in the first step.

Ideally, $Y(jw) = H_2(jw)Y_2(jw)$ implies that

$$20 \quad |Y(jw)| = \begin{cases} |H_2(jw)||Y_2(jw)| = |Y_2(jw)| = |H_1(jw)Y_1(jw)| = |Y^*(jw)| & w \in [c, d] \\ 0 & \text{otherwise} \end{cases}$$

and

$$\angle Y(jw) = \angle H_2(jw) + \angle Y_2(jw) = k_c w + \angle Y^*(jw)$$

due to the linear phase characteristic of $H_2(jw)$ where k_c is a coefficient which is a function of the order of $H_2(jw)$.

25 This indicates that the output frequency response of the designed filter is ideally the same as the desired response over the output frequency range $[c, d]$ except for a linear phase difference between the real and the desired phase response. This is in fact an unavoidable phenomenon if band

pass filtering such as the effect of $H_2(j\omega)$ is applied for the design. However, this is still an ideal characteristic since a linear phase implies that the filter group delay is constant, the filtered signal is simply delayed for some time determined by k_c , and the wave shape of the processed signal is preserved, that is, there is no phase distortion in the filter output.

The results of a specific nonlinear filter design obtained using the above procedure and based on specifications for both the magnitude and phase are shown in figures 33-35.

The given input for this design was produced using a white noise sequence uniformly distributed in $[0,4]$ and band limited within the frequency range $[a,b]=[1,8]$ under a sampling interval $T_s=0.02$ s. The magnitude of the spectrum of the given input is shown in figure 33.

The desired output spectrum was chosen to be

$$Y^*(j\omega) = \begin{cases} \frac{\exp(-500\omega) + j(600\omega^2)}{1000} & \omega \in [c,d] = [13,16] \\ 0 & \text{otherwise} \end{cases}$$

Figure 33 also shows the comparison between the magnitude of the output spectrum $Y(j\omega)$ of the designed nonlinear filter and the magnitude of the desired spectrum $Y^*(j\omega)$.

Figure 34 shows the comparison between the phase angle of $Y_2(j\omega)$, the output spectrum before linear phase filtering, and the phase angle of the desired spectrum $Y^*(j\omega)$.

Figure 35 shows the phase angle of the applied linear phase filter $H_2(j\omega)$.

It can be observed from the above that a nonlinear filter designed using the basic principles of the present invention can produce an output frequency response which

Figure 35 shows the phase angle of the applied linear phase filter $H_2(j\omega)$.

It can be observed from the above that a nonlinear filter designed using the basic principles of the present invention can produce an output frequency response which satisfies a design specification in terms of both the magnitude and phase.

The discrete time model description of the designed filter is given below where the nonlinear part of the model is the discrete time model description of the nonlinear filter

$$y_1(t) = N[u(t)]$$

and the linear part of the model is the discrete time model description of the linear filter, the frequency response function of which is

$$H(j\omega) = H_1(j\omega)H_2(j\omega)$$

Nonlinear part of the model:

$$\begin{aligned} y(k) = & + (3.123e+06) u(k-1) + (-2.244e+07) u(k-2) + (6.602e+07) u(k-3) \\ & + (-1.027e+08) u(k-4) + (8.961e+07) u(k-5) + (-4.18e+07) u(k-6) \\ & + (8.176e+06) u(k-7) + (4.239e+09) u(k-1)u(k-1) \\ & + (-1.772e+10) u(k-1)u(k-2) + (5.897e+09) u(k-1)u(k-3) \\ & + (7.213e+09) u(k-1)u(k-4) + (-3.66e+09) u(k-1)u(k-5) \\ & + (-1.869e+08) u(k-1)u(k-6) + (6.736e+07) u(k-1)u(k-7) \\ & + (-6.777e+08) u(k-2)u(k-2) + (8.003e+10) u(k-2)u(k-3) \\ & + (-7.57e+10) u(k-2)u(k-4) + (6.023e+09) u(k-2)u(k-5) \\ & + (8.648e+09) u(k-2)u(k-6) + (-4.365e+08) u(k-2)u(k-7) \\ & + (-8.365e+10) u(k-3)u(k-3) + (2.268e+10) u(k-3)u(k-4) \\ & + (1.005e+11) u(k-3)u(k-5) + (-3.795e+10) u(k-3)u(k-6) \\ & + (-2.516e+09) u(k-3)u(k-7) + (1.054e+11) u(k-4)u(k-4) \\ & + (-1.97e+11) u(k-4)u(k-5) + (1.109e+10) u(k-4)u(k-6) \end{aligned}$$

$+(1.907e+10) u(k-4)u(k-7) + (2.352e+10) u(k-5)u(k-5)$
 $+(8.173e+10) u(k-5)u(k-6) + (-3.318e+10) u(k-5)u(k-7)$
 $+(-4.218e+10) u(k-6)u(k-6) + (2.042e+10) u(k-6)u(k-7)$
 $+(-1.658e+09) u(k-7)u(k-7)$

5

Linear part of the model:

$y(k) = b(1)u(k) + b(2)u(k-1) + \dots + b(m)u(k-m) - a(1)y(k-1) - \dots -$
 $a(n)y(k-n)$

10 with $n=2$ and $m=303$ where

$[a(1), \dots, a(n)] =$

$-1.86215871605398 \quad 0.95715116734794$

and

$[b(1), \dots, b(m)] =$

15 $1.0e-03 *$

Columns 1 through 4

$0.00000003328202 \quad 0.00000021432147 \quad 0.00000080368128$
 0.00000227704991

Columns 5 through 8

20 $0.00000537879856 \quad 0.00001113499106 \quad 0.00002079938253$
 0.00003571014847

Columns 9 through 12

$0.00005704570668 \quad 0.00008548478679 \quad 0.00012079738459$
 0.00016141668710

25 Columns 13 through 16

$0.00020406372559 \quad 0.00024351205626 \quad 0.00027258483896$
 0.00028246765302

Columns 17 through 20

$0.00026339508245 \quad 0.00020572744049 \quad 0.00010137844659$

30 -0.00005450964923

Columns 21 through 24

$-0.00026181250429 \quad -0.00051381800480 \quad -0.00079603373996$
 -0.00108568381434

Columns 25 through 28

35 $-0.00135214637123 \quad -0.00155851835832 \quad -0.00166438952001$
 -0.00162976908378

Columns 29 through 32

	-0.00141994747987 0.00041552374840	-0.00101090816448	-0.00039475153522
	Columns 33 through 36		
5	0.00138259540242 0.00447655873267	0.00244344402372	0.00351062196838
	Columns 37 through 40		
	0.00522101718800 0.00496627276545	0.00562147075427	0.00556579258464
	Columns 41 through 44		
10	0.00377365278712 -0.00303968275897	0.00198963381599	-0.00032378155160
	Columns 45 through 48		
	-0.00596769040539 -0.01339358387193	-0.00886230677976	-0.01143843394688
15	Columns 49 through 52		
	-0.01443551408603 -0.00996641286493	-0.01431325012233	-0.01284878916639
	Columns 53 through 56		
20	-0.00571602453045 0.01264965179911	-0.00028726506096	0.00598841256370
	Columns 57 through 60		
	0.01913182739200 0.03124135106508	0.02480771068003	0.02903991461588
	Columns 61 through 64		
25	0.03093862246516 0.01317044094614	0.02783233132424	0.02184786863383
	Columns 65 through 68		
	0.00225896524855 -0.03560414378179	-0.01016501602446	-0.02315515892661
30	Columns 69 through 72		
	-0.04633007891956 -0.05744137376473	-0.05417943987784	-0.05813822823951
	Columns 73 through 76		
	-0.05166958483783 -0.00621129546254	-0.04082303832663	-0.02536256454818
35	Columns 77 through 80		
	0.01528703636150 0.07616729599331	0.03745307958913	0.05839584942467

Columns 81 through 84
0.08893537701557 0.09516078483677 0.09376093809767
0.08424478625381

Columns 85 through 88
5 0.06680350720636 0.04234527006789 0.01246669428018
-0.02064087852648

Columns 89 through 92
-0.05434613862312 -0.08578337461088 -0.11209316760456
-0.13067820746590

10 Columns 93 through 96
-0.13945154456062 -0.13705390892471 -0.12301823047738
-0.09786316009190

Columns 97 through 100
-0.06310299056015 -0.02116847625143 0.02475895107438
15 0.07098889554710

Columns 101 through 104
0.11362138287669 0.14887942949652 0.17344622849594
0.18477606135825

Columns 105 through 108
20 0.18134984027062 0.16284982658307 0.13023456167487
0.08570350882143

Columns 109 through 112
0.03255064587105 -0.02508361142904 -0.08254318260252
-0.13504269472806

25 Columns 113 through 116
-0.17807650738416 -0.20781448143133 -0.22144885867665
-0.21746018536730

Columns 117 through 120
-0.19577680884658 -0.15781155123986 -0.10636991902139

30 -0.04543567185132

Columns 121 through 124
0.02014930576277 0.08508414798056 0.14405304899329
0.19217566873157

Columns 125 through 128
35 0.22542441249983 0.24097171607669 0.23743645368538
0.21500740460840

Columns 129 through 132
0.17543256598964 0.12187499247761 0.05864768640035

-0.00914923229050
Columns 133 through 136
-0.07605725937466 -0.13671663683833 -0.18631209098366
-0.22096869885059
5 Columns 137 through 140
-0.23806415895179 -0.23643147511610 -0.21643603250516
-0.17992231311682
Columns 141 through 144
-0.13003701658436 -0.07094606546323 -0.00747191949549
10 0.05531598034943
Columns 145 through 148
0.11252149812387 0.15981666793597 0.19377819943088
0.21213874239435
Columns 149 through 152
15 0.21393429471004 0.19953878954962 0.17058700949905
0.12979660938955
Columns 153 through 156
0.08070832589097 0.02736960335274 -0.02600882989955
-0.07539394440027
20 Columns 157 through 160
-0.11724060322409 -0.14874679880287 -0.16803574024719
-0.17425382855726
Columns 161 through 164
-0.16758132308460 -0.14916007746448 -0.12094944070741
25 -0.08552673296083
Columns 165 through 168
-0.04585223365109 -0.00502017035384 0.03398322634818
0.06849574758055
Columns 169 through 172
30 0.09635411698109 0.11601725927068 0.12663256434628
0.12804494388799
Columns 173 through 176
0.12075316710299 0.10582180562013 0.08475985344594
0.05937858562038
35 Columns 177 through 180
0.03164147930605 0.00351816237707 -0.02314740959980
-0.04674674074459
Columns 181 through 184

-0.06598945884170 -0.07995651694641 -0.08812411270222
-0.09036059631364
Columns 185 through 188
-0.08690017680683 -0.07829817708583 -0.06537295841595
5 -0.04913952047510
Columns 189 through 192
-0.03073930999045 -0.01137008308799 0.00778109613199
0.02559935810198
Columns 193 through 196
10 0.04109626424759 0.05345544314259 0.06206856688305
0.06656076607150
Columns 197 through 200
0.06680468888031 0.06292254225138 0.05527568217195
0.04444169619049
15 Columns 201 through 204
0.03117946545587 0.01638338990942 0.00102875697948
-0.01388895099522
Columns 205 through 208
-0.02741724189660 -0.03870846951445 -0.04707559699096
20 -0.05203784736309
Columns 209 through 212
-0.05335260858275 -0.05103084289941 -0.04533443158680
-0.03675527219878
Columns 213 through 216
25 -0.02597741626758 -0.01382495500742 -0.00119959263130
0.01098723154804
Columns 217 through 220
0.02188229583806 0.03075319656401 0.03704059636285
0.04039599306472
30 Columns 221 through 224
0.04070212260137 0.03807460516092 0.03284505620907
0.02552746332356
Columns 225 through 228
0.01677103005022 0.00730378144712 -0.00212808430644
35 -0.01081988478115
Columns 229 through 232
-0.01816221252030 -0.02368447649585 -0.02708498340864
-0.02824561802129

Columns 233 through 236
-0.02723060984541 -0.02427029083261 -0.01973202360355
-0.01408149907660

Columns 237 through 240
5 -0.00783828203366 -0.00152977531128 0.00435233046871
0.00938952420923

Columns 241 through 244
0.01326503243370 0.01578162483958 0.01686791315533
0.01657347478885

10 Columns 245 through 248
0.01505411203293 0.01254934451451 0.00935476560966
0.00579214028759

Columns 249 through 252
0.00218008037598 -0.00119216975076 -0.00408581800286

15 -0.00632711824010

Columns 253 through 256
-0.00781483560799 -0.00852066157236 -0.00848329376098
-0.00779740923517

Columns 257 through 260
20 -0.00659902170090 -0.00504908820003 -0.00331691201488
-0.00156482692685

Columns 261 through 264
0.00006463440339 0.00145824730714 0.00253783620427
0.00326220436512

25 Columns 265 through 268
0.00362556118310 0.00365304002511 0.00339409451670
0.00291465798950

Columns 269 through 272
0.00228895177653 0.00159174429109 0.00089171267597

30 0.00024636506918

Columns 273 through 276
-0.00030123128510 -0.00072387920912 -0.00100998481168
-0.00116188515783

Columns 277 through 280
35 -0.00119315515203 -0.00112532046764 -0.00098439594641
-0.00079761965498

Columns 281 through 284
-0.00059067279083 -0.00038557775676 -0.00019936402666

-0.00004349568836
Columns 285 through 288
0.00007602486265 0.00015801946885 0.00020513691086
0.00022267635728
5 Columns 289 through 292
0.00021739726997 0.00019645030203 0.00016652267489
0.00013324716819
Columns 293 through 296
0.00010088214188 0.00007223559481 0.00004878213424
10 0.00003090906954
Columns 297 through 300
0.00001822614592 0.00000988083116 0.00000483478363
0.00000207399807
Columns 301 through 303
15 0.00000074209218 0.00000020073804 0.00000003164528

TABLE 1

IV.2 DESIGN OF NONLINEAR FILTERS TO FOCUS ENERGY FROM DIFFERENT FREQUENCY BANDS INTO A SINGLE FREQUENCY BAND

The above embodiments of the present invention illustrate how the principles underlying the invention can be used to transfer energy from one frequency or frequency range to another frequency or frequency range. However, it will be appreciated that the present invention can equally well be utilised to focus energy from a given frequency band or given frequency bands into a single, and preferably, narrower frequency band.

The problem to be addressed in this design is that given an input spectrum which possesses nonzero magnitude characteristics over two different frequency bands $[a_1, b_1]$ and $[a_2, b_2]$, where $a_2 > b_1$, a filter is required to be designed to focus energy from the two different input frequency bands into a single output frequency band $[c, d]$, where $c > b_1, d < a_2$, with the spectrum of the filter output over the output frequency range $[c, d]$ satisfying certain specifications. The specifications to be satisfied can be specified in terms of magnitude, phase or both.

The only difference of this design compared to the designs in Section I is that the determination of the maximum order N of the filter nonlinearities should not only ensure that the specified output frequency band $[c, d]$ is covered by the filter's output frequency range, but also should ensure that the output energy over $[c, d]$ is derived from the input frequency range $[a_1, b_1]$ and the input frequency range $[a_2, b_2]$. Therefore, the principles for this design are exactly the same as those described in Section I except for step (iii) which should follow the new principle above.

Consider an example where a nonlinear filter is to be designed to focus the energy from two different frequency bands [3,4] and [10,11] of an input signal

$$u(t) = 2M_u \left(\frac{1}{2\pi} \frac{\sin 2\pi b_1 t - \sin 2\pi a_1 t}{t} + \frac{1}{2\pi} \frac{\sin 2\pi b_2 t - \sin 2\pi a_2 t}{t} \right)$$

- 5 where $b_1 = 4$, $a_1 = 3$, $b_2 = 11$, $a_2 = 10$, $M_u = 0.03$, into a single frequency band around frequency $f=7$ with the single output frequency band as small as possible and the output magnitude characteristic at frequency $f=7$ being $3M_u = 0.09$.

- 10 It can be shown that when subject to the excitation of an input with the frequency spectrum over two different frequency bands $[a_1, b_1]$ and $[a_2, b_2]$, the output frequency ranges of a nonlinear system contributed by the system's 2nd order nonlinearity is

$$[2a_2, 2b_2], [2a_1, 2b_1], [a_1 + a_2, b_1 + b_2], [0, b_1 - a_1] \cup [0, b_2 - a_2] \text{ and } [a_2 - b_1, b_2 - a_1]$$

- 15 Substituting $b_1 = 4$, $a_1 = 3$, $b_2 = 11$, $a_2 = 10$ into $a_2 - b_1$ and $b_2 - a_1$ yields

$$[a_2 - b_1, b_2 - a_1] = [6, 8]$$

- Clearly this output frequency range covers frequency $f=7$ and the system output energy over this frequency band is
20 derived from the input frequency range $[a_1, b_1] = [3, 4]$ and the input frequency range $[a_2, b_2] = [10, 11]$. Therefore, the maximum order of system nonlinearities can be taken to be $N=2$ for this specific design.

- Moreover, following the same design principles as
25 described in Section I, a discrete time nonlinear filter under the sampling period $T_s = 1/50s$ can be obtained for this specific design. Figure 36 illustrates schematically such a filter.

Figures 37 and 38 show the input and output frequency spectra of this filter respectively and clearly indicate that the input energy over the two different input frequency bands [3,4] and [10,11] have been, as required, successfully focused into a very small band around frequency $f=7$.

IV.3 DESIGN OF SPATIAL DOMAIN NONLINEAR FILTERS

Although the above embodiments have been described with reference to the design of non-linear time-domain systems, it will be appreciated that the present invention is equally applicable to non-linear spatial-domain systems.

In the one dimensional case, the present invention can be directly applied and the only difference of the one-dimensional spatial domain case over the above time-domain embodiments is that the time-domain variables t and k in the continuous and discrete time filter equations become the continuous and discrete spatial variables X and X_k in the spatial domain filter equations.

Consider a one dimensional spatial domain filtering problem that is the same as the second problem addressed in Section II.1 except that the time variables t and k become the spatial variables X and X_k in the present design.

Figure 39 shows the block diagram of the spatial domain nonlinear filter designed in this case. It can be seen that the spatial-domain filter is exactly the same as that shown in figure 9 which is the block diagram of the corresponding time domain nonlinear filter designed in Section II.1 except that the time variables t , k , T , and s (second) in figure 9 have been changed to the spatial variables X , X_k , ΔX , and m (meter) in figure 39.

Figures 40 and 41 show the effects of spatial domain nonlinear filter. Again, except for the time variables

being changed to spatial variables, the figures are the same as figures 11 and 13 which are the results of the corresponding time domain nonlinear filter.

The filtering effect in the time domain of the second nonlinear filter designed in Section II.1 indicates an energy transfer from the input frequencies $w_{a1}=1$ and $w_{a2}=2$ to the output frequency $w_{a0}=4$. Figure 40 indicates the same effect but in the spatial domain. In this case, the spatial domain nonlinear filter transfers energy from the input spatial frequencies $w_{a1}=1$ and $w_{a2}=2$ to the output spatial frequency $w_{a0}=4$.

When this one dimensional spatial domain nonlinear filter is applied for one dimensional image processing, where figure 41 represents the intensities over the spatial variable X of the images before and after the processing, the energy transformation effect of the spatial domain nonlinear filter can be further illustrated by figures 42 and 43. Figure 42 shows the one dimensional input image with energy located in spatial frequencies $w_{a1}=1$ and $w_{a2}=2$ and figure 43 shows the one dimensional output image with energy located in another spatial frequency $w_{a0}=4$ due to the effect of nonlinear filtering.

Although the present invention has been described above with reference to a one dimensional case in the spatial domain, it will be appreciated that the present invention is not limited thereto. The present invention can equally well be applied to the design and implementation of non-linear systems for realising transfer of energy from first m -dimensional spatial domain frequencies to specified second n -dimensional spatial domain frequencies, where m and n are greater than one.

It will be appreciated that an application of the transfer of energy from first m -dimensional spatial domain frequencies to specified second n -dimensional spatial domain frequencies would be digital image processing or filtering. In such a case $m=n=2$. The present invention can be designed to produce filters that operate upon digital images. The filters can be designed to perform numerous different functions such as, for example, image compression or filtering to remove noise or vary the colour space of an image.

The phrase "transfer of energy" includes, without limitation, the processing of a first signal, specified in the time domain or spatial domain, to produce second signal having predeterminable characteristics including a specified energy distribution.

Furthermore, it will be appreciated that the terms "frequency range" and "range of frequencies" includes a group of frequencies or frequency group. A group of frequencies comprises a plurality of frequencies spatially distributed within an n -dimensional space or over a subspace.

It will be appreciated by those skilled in the art that the phrase "specified spectrum" relates to the specification of at least one of either the magnitude and phase of a signal or frequency components of a signal and is equally applicable to situations in which only the magnitude is specified and to situations in which both the magnitude and phase are specified.

It will be appreciated that the input and output signals of any or all of the various embodiments of the present invention may be time or spatial domain continuous or discrete input or output signals.

Referring to figure 44 there is shown a data processing system 4400 upon which embodiments of the present invention, that is to say, the non-linear systems and the methods of design thereof can be implemented or realised. It will also
5 be appreciated that the non-linear systems so designed may be implemented in digital form using the data processing system or other suitable hardware and software. The data processing system 4400 comprises a central processing unit 4402 for processing computer instructions for implementing the design
10 of nonlinear systems given an input signal and particular output signal requirements. The data processing system also comprises a memory 4404 for storing data to be processed or the results of processing as well as computer program instructions for processing such data, a system bus 4406, an
15 input device 4408, an output device 4410 and a mass storage device, for example, a hard disc drive 4412.

CLAIMS

1. A method for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said method comprising the steps of
- identifying or specifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,
- specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and
- calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of the time or spatial domain description of the generalised non-linear system in order to give effect to the energy transfer.
2. A method as claimed in claim 1, further comprising the step of
- selecting a time or spatial domain description of the generalised non-linear system;
- determining or defining a frequency domain description of the time or spatial domain input for the generalised non-linear system; and

determining or defining the frequency domain description of the output signal, for example, the output spectrum, of the generalised non-linear system expressed in terms of the frequency domain description of said input signal and the coefficients of the time or spatial domain description of a generalised non-linear system.

3. A method as claimed in either of claims 1 or 2, wherein the frequency domain description of the input signal is $U(jw)$, the time or spatial domain description of said generalised non-linear system is given by the generalised NARX model

$$y(k) = \sum_{n=1}^N y_n(k) \quad (C1)$$

where

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (C2)$$

with

$$p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, l_{p+q}=1}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

- the frequency domain description of the output of the generalised non-linear system is given by

$$Y(jw) = \sum_{n=1}^{\bar{N}} Y_n(jw) \quad (C3)$$

where

$$Y_n(jw) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{w_1 + \dots + w_n = w} H_n(jw_1, \dots, jw_n) \prod_{i=1}^n U(jw_i) d\sigma_w \quad (C4)$$

- \bar{N} is the maximum order of dominant system nonlinearities,

$$\int_{w_1 + \dots + w_n = w} (.) d\sigma_w$$

denotes an integration over the n th-dimensional hyper-plane $w_1 + \dots + w_n = w$, and $H_n(jw_1, \dots, jw_n)$, $n=1, \dots, \bar{N}$ are generalised frequency response functions of the non-linear system.

4. A method as claimed in any preceding claim, further comprising the step of

determining a mapping between the time or spatial domain description of the generalised nonlinear system and the frequency domain description of the generalised nonlinear system.

5. A method as claimed in claim 4, wherein the mapping from the time or spatial domain description of the generalised non-linear system to the frequency domain description of the system is given as

$$\begin{aligned}
 & \left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(w_1 + \dots + w_n) l_1] \right\} H_n(jw_1, \dots, jw_n) \\
 &= \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \exp[-j(w_1 l_1 + \dots + w_n l_n)] \\
 &+ \sum_{q=1}^{n-1} \sum_{p=1}^{n-q} \sum_{l_1, l_{p+q}=1}^{K_{p+q}} c_{pq}(l_1, \dots, l_{p+q}) \exp[-j(w_{n-q+1} l_{p+1} + \dots + w_n l_{p+q})] H_{n-q,p}(jw_1, \dots, jw_{n-q}) \\
 &+ \sum_{p=2}^n \sum_{l_1, l_p=1}^{K_p} c_{p0}(l_1, \dots, l_p) H_{n,p}(jw_1, \dots, jw_n)
 \end{aligned}
 \tag{C5}$$

where

$$H_{np}(jw_1, \dots, jw_n) = \sum_{i=1}^{n-p+1} H_i(jw_1, \dots, jw_i) H_{n-i,p-1}(jw_{i+1}, \dots, jw_n) \exp[-j(w_1 + \dots + w_i) l_p]
 \tag{C6}$$

6. A method as claimed in any preceding claim, further comprising the steps of

5 defining or determining a general relationship between the input and output frequency or frequency ranges of the generalised non-linear system.

7. A method as claimed in any preceding claim, wherein the relationship between the input and output frequencies
10 or frequency ranges is given by the following

$$f_Y = f_{Y_N} \cup f_{Y_{N-1}} \quad (C7)$$

where f_Y denotes the range of frequencies of the output, and f_{Y_N} and $f_{Y_{N-1}}$ denote the ranges of frequencies produced by the N th-order and $(N-1)$ th-order nonlinearities, and

$$15 \quad f_{Y_n} = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] \geq 1 \end{cases} \quad (C8)$$

$n = N \quad \text{and} \quad N-1$

where $[.]$ relates to or means take the integer part,

$$i^* = \left[\frac{na}{(a+b)} \right] + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k=0, \dots, i^*-1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

20

and the frequencies of the signal to be processed are in the range $[a,b]$ and given $[a,b]$ and the required output frequency range f_Y , the method further comprises the step of determining the smallest N from the
25 relationship above for the generalised non-linear

system which can bring about the specified frequency domain energy transformation.

8. A method as claimed in claim 7, wherein, with \bar{N} having been determined and $K_n, n=1, \dots, \bar{N}$, being given a priori, the method further comprises the steps of:
- taking N as \bar{N} and determining the coefficients of the time or spatial domain model of the generalised non-linear system from the description for the system output spectrum given in terms of the spectrum of the input signal and the coefficients of the time or spatial domain model of the said generalised non-linear system.
9. A method as claimed in claim 8, further comprising the steps of
- substituting $H_n(jw_1, \dots, jw_n)$ given in (C5) into (C4), and substituting the resultant expression for $Y_n(jw)$ into (C3) to obtain the description for the system output spectrum in terms of a function of the spectrum of the input signal and the coefficients of the time or spatial domain model of the said generalised nonlinear system.
10. A method for realising or manufacturing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, the method comprising the steps of

(a) designing the non-linear system using the method as claimed in any of claims 1 to 9; and

(b) materially producing the non-linear system so designed or using the non-linear system so designed to modify materially the transfer function of an existing linear or non-linear system.

11. A data processing system for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising
- means for identifying or specifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,
- means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and
- means for calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of the time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

12. A system as claimed in claim 11, further comprising

means for selecting a time or spatial domain description of the generalised non-linear system;

means for determining or defining a frequency domain description of the time or spatial domain input for the generalised non-linear system; and

means for determining or defining the frequency domain description of the output of the generalised non-linear system expressed in terms of the frequency domain description of said input signal and the coefficients of the time or spatial domain description of a generalised non-linear system.

13. A system as claimed in either of claims 11 or 12, wherein the frequency domain description of the input signal is $U(jw)$, the time or spatial domain description of the generalised non-linear system is given by the generalised NARX model

$$y(k) = \sum_{n=1}^N y_n(k) \quad (C9)$$

where

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (C10)$$

with

$$p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, l_{p+q}=1}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

the frequency domain description of the output of the generalised non-linear system is given by

$$Y(jw) = \sum_{n=1}^{\bar{N}} Y_n(jw) \quad (C11)$$

where

$$Y_n(jw) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{w_1+\dots+w_n=w} H_n(jw_1, \dots, jw_n) \prod_{i=1}^n U(jw_i) d\sigma_w \quad (C12)$$

\bar{N} is the maximum order of dominant system nonlinearities,

$$\int_{w_1+\dots+w_n=w} (\cdot) d\sigma_w$$

5 denotes an integration over the nth-dimensional hyper-plane $w_1+\dots+w_n=w$, and $H_n(jw_1, \dots, jw_n)$, $n=1, \dots, \bar{N}$ are generalised frequency response functions of the said non-linear system.

10 14. A system as claimed in any of claims 11 to 13, further comprising

means for determining a mapping between the time or spatial domain description of the generalised nonlinear system and the frequency domain description of the generalised nonlinear system.

15

15. A system as claimed in claim 14, wherein the mapping from the time or spatial domain description of the generalised non-linear system to the frequency domain description of the system is given as

$$\begin{aligned} & \left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(w_1+\dots+w_n)l_1] \right\} H_n(jw_1, \dots, jw_n) \\ &= \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \exp[-j(w_1l_1+\dots+w_nl_n)] \\ &+ \sum_{q=1}^{n-1} \sum_{p=1}^{n-q} \sum_{l_1, l_{p+q}=1}^{K_{p+q}} c_{pq}(l_1, \dots, l_{p+q}) \exp[-j(w_{n-q+1}l_{p+1}+\dots+w_nl_{p+q})] H_{n-q,p}(jw_1, \dots, jw_{n-q}) \\ &+ \sum_{p=2}^n \sum_{l_1, l_p=1}^{K_p} c_{p0}(l_1, \dots, l_p) H_{n,p}(jw_1, \dots, jw_n) \end{aligned} \quad (C13)$$

where

$$H_{np}(jw_1, \dots, jw_n) = \sum_{i=1}^{n-p+1} H_i(jw_1, \dots, jw_i) H_{n-i, p-1}(jw_{i+1}, \dots, jw_n) \exp[-j(w_1 + \dots + w_i) l_p] \quad (C14)$$

16. A system as claimed in any of claims 11 to 15, further comprising

means for defining or determining a general relationship between the input and output frequency or frequency ranges of the generalised non-linear system.

17. A system as claimed in any of claims 11 to 16, wherein the relationship between the input and output frequencies or frequency ranges is given by the following

$$f_y = f_{y_N} \cup f_{y_{N-1}} \quad (C15)$$

where f_y denotes the range of frequencies of the output, and f_{y_N} and $f_{y_{N-1}}$ denote the ranges of frequencies produced by the N th-order and $(N-1)$ th-order nonlinearities, and

$$f_{y_n} = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases} \quad (C16)$$

$n = N \quad \text{and} \quad N-1$

where $[.]$ relates to or means take the integer part,

$$i^* = \left\lceil \frac{na}{(a+b)} \right\rceil + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k=0, \dots, i^*-1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

and the frequencies of the signal to be processed are in the range $[a, b]$ and given $[a, b]$ and the required output

frequency range f_Y , the system further comprises the means for determining the smallest \bar{N} from the relationship above for the said generalised non-linear system which can bring about the specified frequency domain energy transformation.

5

18. A system as claimed in claim 17, wherein, with \bar{N} having been determined and $K_n, n=1, \dots, \bar{N}$, being given a priori, the system further comprises the means:

10

for taking N as \bar{N} and for determining the coefficients of the time or spatial domain model of the generalised non-linear system from the description for the system output spectrum given in terms of the spectrum of the input signal and the coefficients of the time or spatial domain model of the generalised non-linear system.

15

19. A system as claimed in claim 18, further comprising means for substituting $H_n(jw_1, \dots, jw_n)$ given in (C13) into (C12), and substituting the resultant expression for $Y_n(jw)$ into (C11) to obtain the description for the system output spectrum in terms of a function of the spectrum of the input signal and the coefficients of the time or spatial domain model of the generalised nonlinear system.

20

20. A computer program product for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, the said product comprising a computer readable storage medium comprising:

30

computer program code means for identifying or specifying the first spectrum of a time or spatial domain input signal from which energy is to be transferred,

5 computer program code means for specifying the second spectrum of a time or spatial domain output signal to which said energy is to be transferred, and

computer program code means for calculating, using a frequency domain description of the output signal, for example, the output spectrum, expressed in terms of a frequency domain description of the input and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

10

15

21. A computer program product as claimed in claim 20, further comprising

20 computer program code means for selecting a time or spatial domain description of the generalised non-linear system;

computer program code means for determining or defining a frequency domain description of the time or spatial domain input for the generalised non-linear system; and

25

computer program code means for determining or defining the frequency domain description of the output of the generalised non-linear system expressed in terms of the frequency domain description of said input signal and the coefficients of the time or spatial domain description of a generalised non-linear system.

30

22. A computer program product as claimed in either of claims 20 or 21, wherein the frequency domain description of the input signal is $U(jw)$, the time or spatial domain description of the generalised non-linear system is given by the generalised NARX model

$$y(k) = \sum_{n=1}^N y_n(k) \quad (C17)$$

where

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, \dots, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (C18)$$

with

$$10 \quad p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, \dots, l_{p+q}=1}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

the frequency domain description of the output of the generalised non-linear system is given by

$$Y(jw) = \sum_{n=1}^{\bar{N}} Y_n(jw) \quad (C19)$$

15 where

$$Y_n(jw) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{w_1 + \dots + w_n = w} H_n(jw_1, \dots, jw_n) \prod_{i=1}^n U(jw_i) d\sigma_w \quad (C20)$$

\bar{N} is the maximum order of dominant system nonlinearities,

$$\int_{w_1 + \dots + w_n = w} (.) d\sigma_w$$

20 denotes an integration over the n th-dimensional hyper-plane $w_1 + \dots + w_n = w$, and $H_n(jw_1, \dots, jw_n)$, $n=1, \dots, \bar{N}$ are generalised frequency response functions of the non-linear system.

23. A computer program product as claimed in any of claims 20 to 22, further comprising

computer program code means for determining a mapping between the time or spatial domain description of the generalised nonlinear system and the frequency domain description of the generalised nonlinear system.

5

24. A computer program product as claimed in claim 23, wherein the mapping from the time or spatial domain description of the generalised non-linear system to the frequency domain description of the system is given as

$$\begin{aligned}
 & \left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(w_1 + \dots + w_n) l_1] \right\} H_n(jw_1, \dots, jw_n) \\
 &= \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \exp[-j(w_1 l_1 + \dots + w_n l_n)] \\
 &+ \sum_{q=1}^{n-1} \sum_{p=1}^{n-q} \sum_{l_1, l_{p+q}=1}^{K_{p+q}} c_{pq}(l_1, \dots, l_{p+q}) \exp[-j(w_{n-q+1} l_{p+1} + \dots + w_n l_{p+q})] H_{n-q,p}(jw_1, \dots, jw_{n-q}) \\
 &+ \sum_{p=2}^n \sum_{l_1, l_p=1}^{K_p} c_{p0}(l_1, \dots, l_p) H_{n,p}(jw_1, \dots, jw_n)
 \end{aligned}
 \tag{C21}$$

where

$$H_{np}(jw_1, \dots, jw_n) = \sum_{i=1}^{n-p+1} H_i(jw_1, \dots, jw_i) H_{n-i,p-1}(jw_{i+1}, \dots, jw_n) \exp[-j(w_1 + \dots + w_i) l_p]
 \tag{C22}$$

15

25. A computer program product as claimed in any of claims 20 to 24, further comprising

20

computer program code means for defining or determining a general relationship between the input and output frequency or frequency ranges of the generalised non-linear system.

26. A computer program product as claimed in any of claims 20 to 25, wherein the relationship between the input

and output frequencies or frequency ranges is given by the following

$$f_y = f_{y_{\bar{N}}} \cup f_{y_{\bar{N}-1}} \quad (C23)$$

where f_y denotes the range of frequencies of the output, and
 5 $f_{y_{\bar{N}}}$ and $f_{y_{\bar{N}-1}}$ denotes the ranges of frequencies produced by the \bar{N} th-order and $(\bar{N}-1)$ th-order nonlinearities, and

$$f_{y_n} = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases} \quad (C24)$$

$n = \bar{N} \quad \text{and} \quad \bar{N}-1$

where $[.]$ relates to or means take the integer part,

$$i^* = \left\lceil \frac{na}{(a+b)} \right\rceil + 1$$

$$10 \quad I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k=0, \dots, i^*-1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

and the frequencies of the signal to be processed are in the range $[a,b]$, given $[a,b]$ and the required output frequency
 15 range f_y , the computer program product further comprises computer program code means for determining the smallest \bar{N} from the relationship above for the said generalised non-linear system which can bring about the specified frequency domain energy transformation.

20

27. A computer program product as claimed in claim 26, wherein, with \bar{N} having been determined and $K_n, n=1, \dots, \bar{N}$, being given a priori, said product further comprises computer program code means for taking N as \bar{N} and
 25 determining the coefficients of the time or spatial domain model of the generalised non-linear system from

the description for the system output spectrum given in terms of the spectrum of the input signal and the coefficients of the time or spatial domain model of the said generalised non-linear system.

5

28. A computer program product as claimed in any of claims 20 to 27, further comprising computer program code means for substituting $H_n(jw_1, \dots, jw_n)$ given in (C21) into (C20), and substituting the resultant expression for $Y_n(jw)$ into (C19) to obtain the description for the system output spectrum in terms of a function of the spectrum of the input signal and the coefficients of the time or spatial domain model of the generalised nonlinear system.

15

29. A method for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies substantially as described herein with reference to and/or as illustrated in the accompanying drawings.

25

30. A method for manufacturing a non-linear system comprising the steps of designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies using a method substantially as

30

described herein with reference to and/or as illustrated in the accompanying drawings and materially producing the non-linear system so designed.

- 5 31. A data processing system for designing a non-linear system
for transferring energy from a time or spatial domain
input signal having a first spectrum at a first pre-
determinable frequency or range of frequencies to a
10 time or spatial domain output signal having a second
spectrum at a second pre-determinable frequency or
range of frequencies substantially as described herein
with reference to and/or as illustrated in the
accompanying drawings.
- 15
32. A computer program product comprising computer program
code means for designing and/or implementing a non-
linear system for transferring energy from a time or
spatial domain input signal having a first spectrum at
20 a first pre-determinable frequency or range of
frequencies to a time or spatial domain output signal
having a second spectrum at a second pre-determinable
frequency or range of frequencies substantially as
described herein with reference to and/or as
25 illustrated in the accompanying drawings.
33. A non-linear system for transferring energy from a time
or spatial domain input signal having a first spectrum
at a first predeterminable frequency or range of
30 frequencies to a time or spatial domain output signal
having a second spectrum at a second pre-determinable
frequency or range of frequencies substantially as
described herein with reference to and/or as
illustrated in the accompanying drawings.

34. A non-linear system which can transfer energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising

means for identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,

means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and

means for giving effect to the energy transfer using coefficients of a time or spatial domain description of a generalised non-linear system, said coefficients having been calculated using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system.

35. A non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising means for implementing a method as claimed in any of claims 1 to 9 or 29.

36. A non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said non-linear system comprising a data processing system as claimed in any of claims 11 to 19 or 31.
37. An article of manufacture comprising a computer usable medium with computer readable program code means embodied in the medium for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, the computer readable program code means in said article comprising:
- computer readable program code means for identifying the first spectrum of a time or spatial domain input signal from which energy is to be transferred,
- computer readable program code means for specifying the second spectrum of a time or spatial domain output signal to which said energy is to be transferred, and
- computer readable program code means for calculating, using a frequency domain description of the output signal, for example, the output spectrum, expressed in terms of a frequency domain description of the input and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

1/38

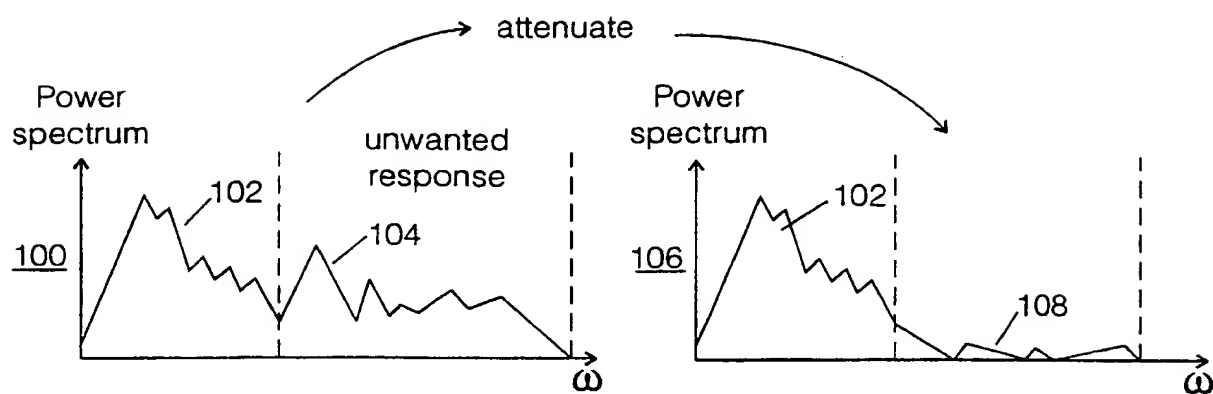


Fig. 1

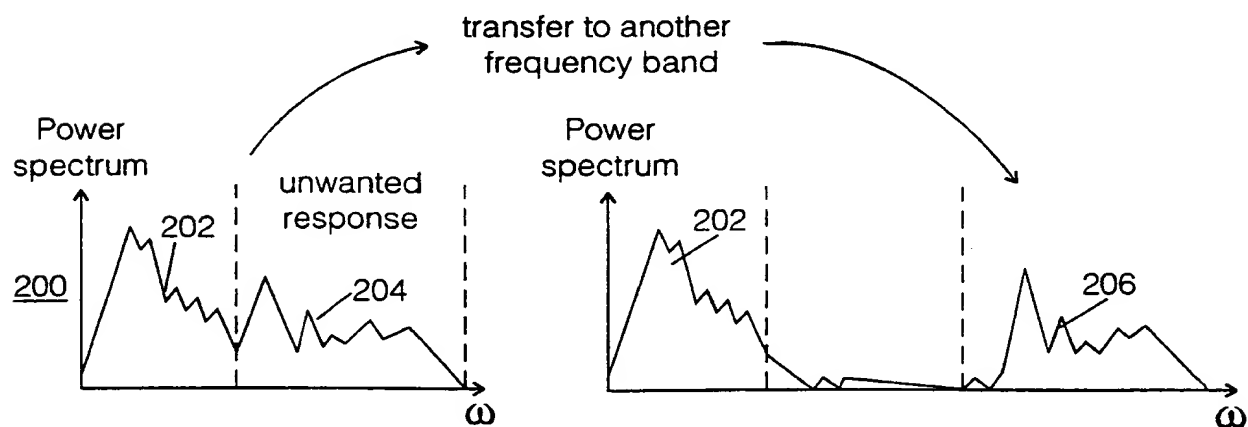


Fig. 2

2/38

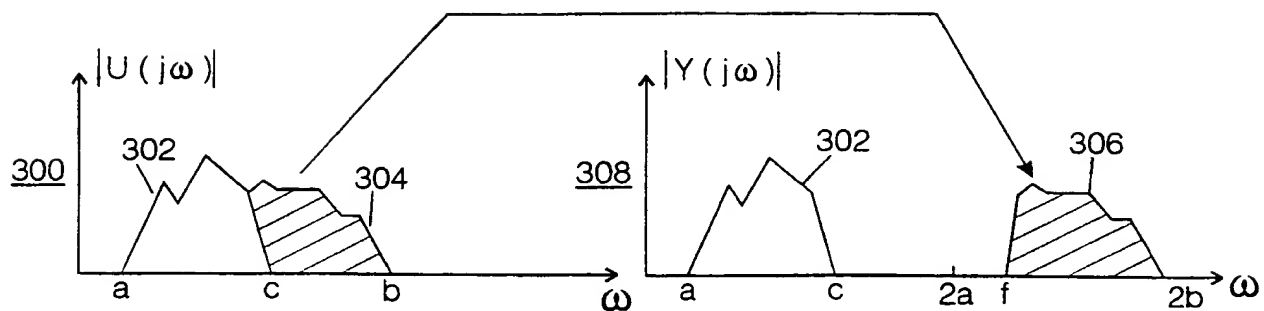


Fig. 3

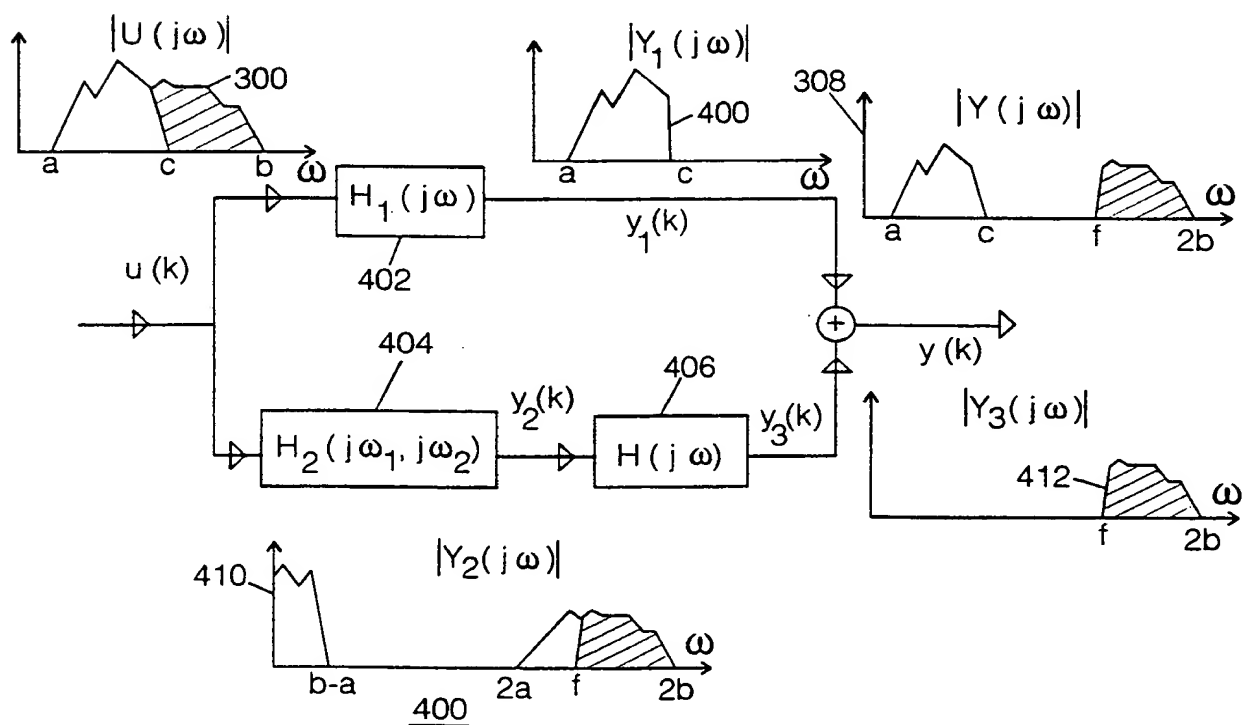


Fig. 4

3/38

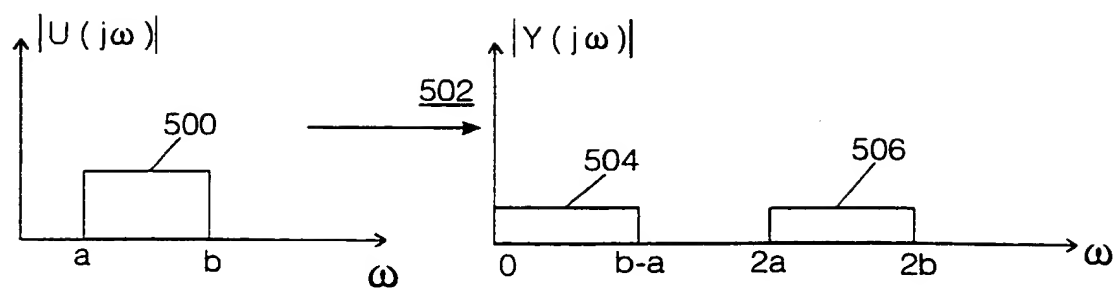


Fig. 5

4/38

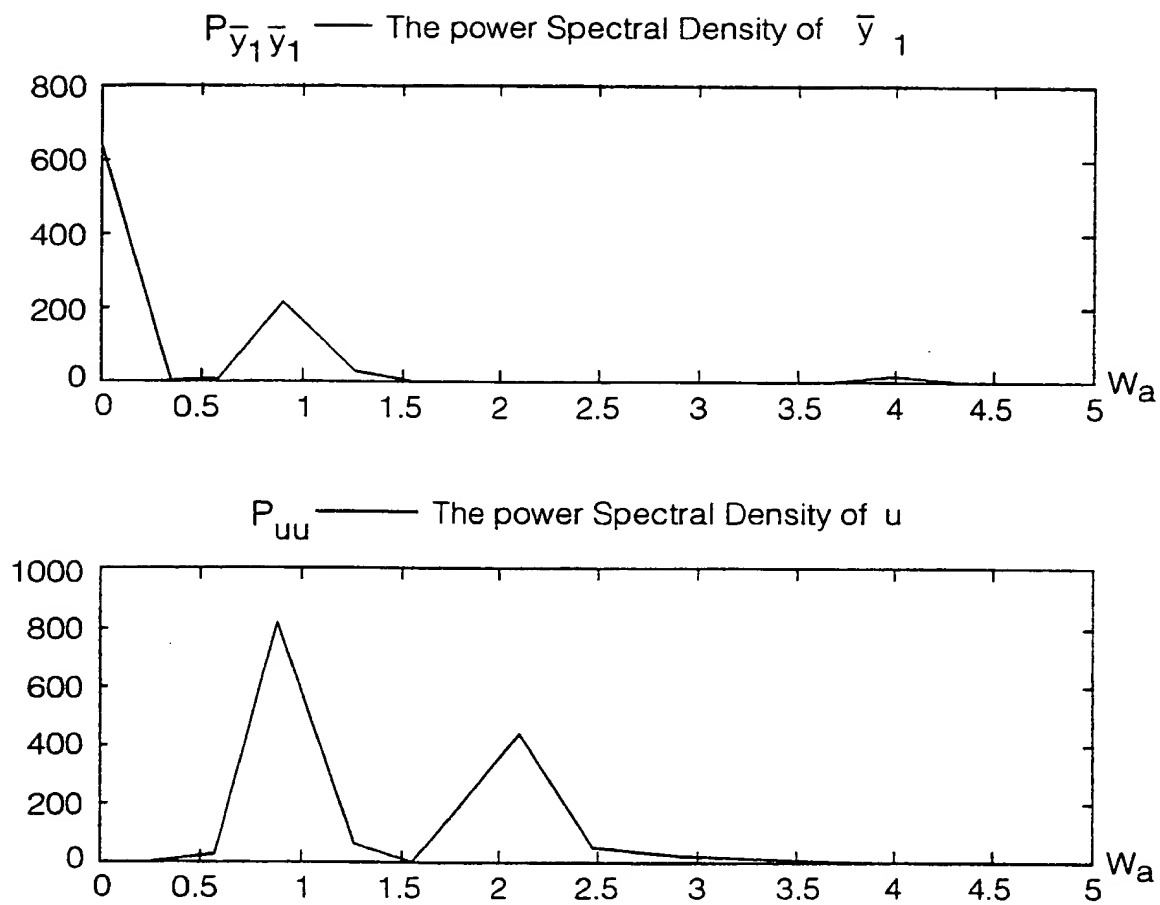


Fig. 6

5/38

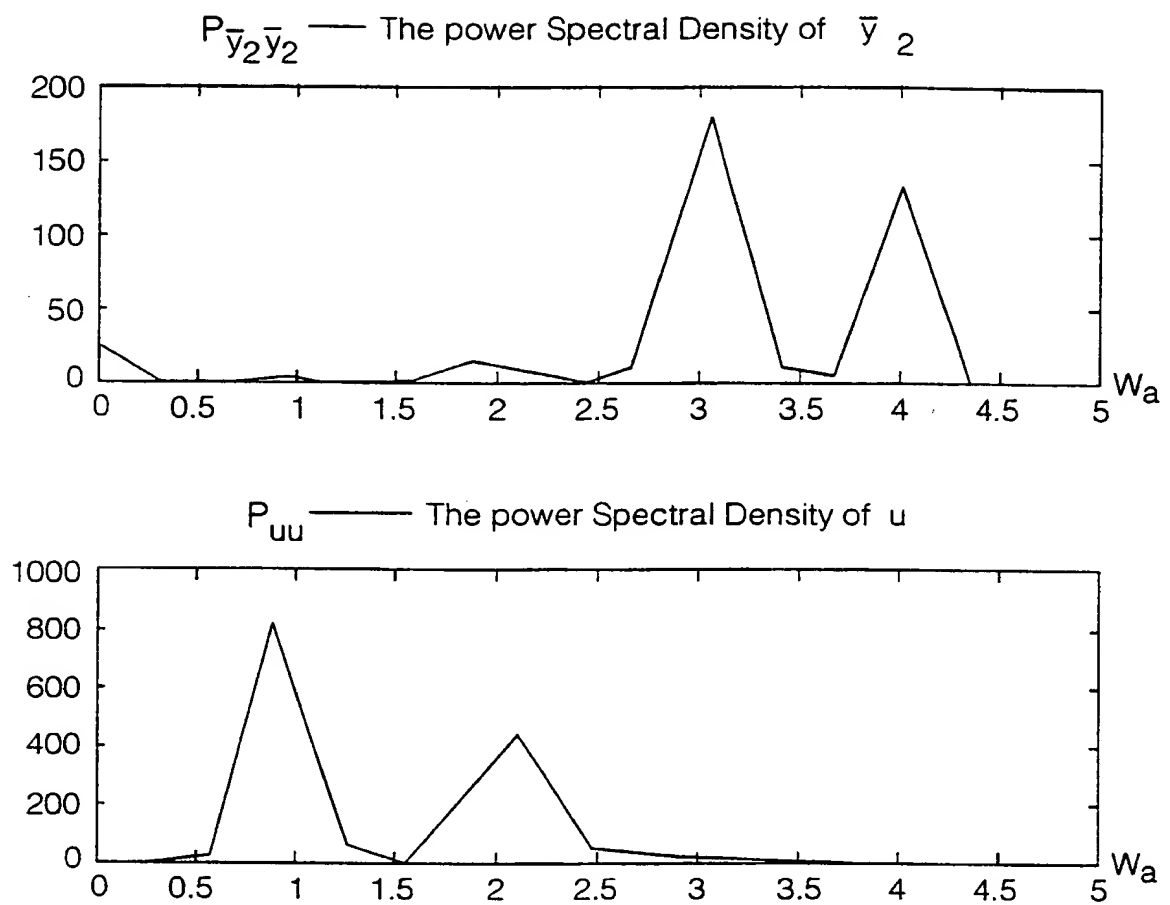


Fig. 7

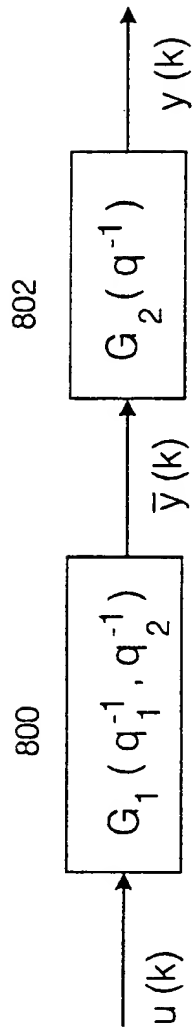


Fig. 8

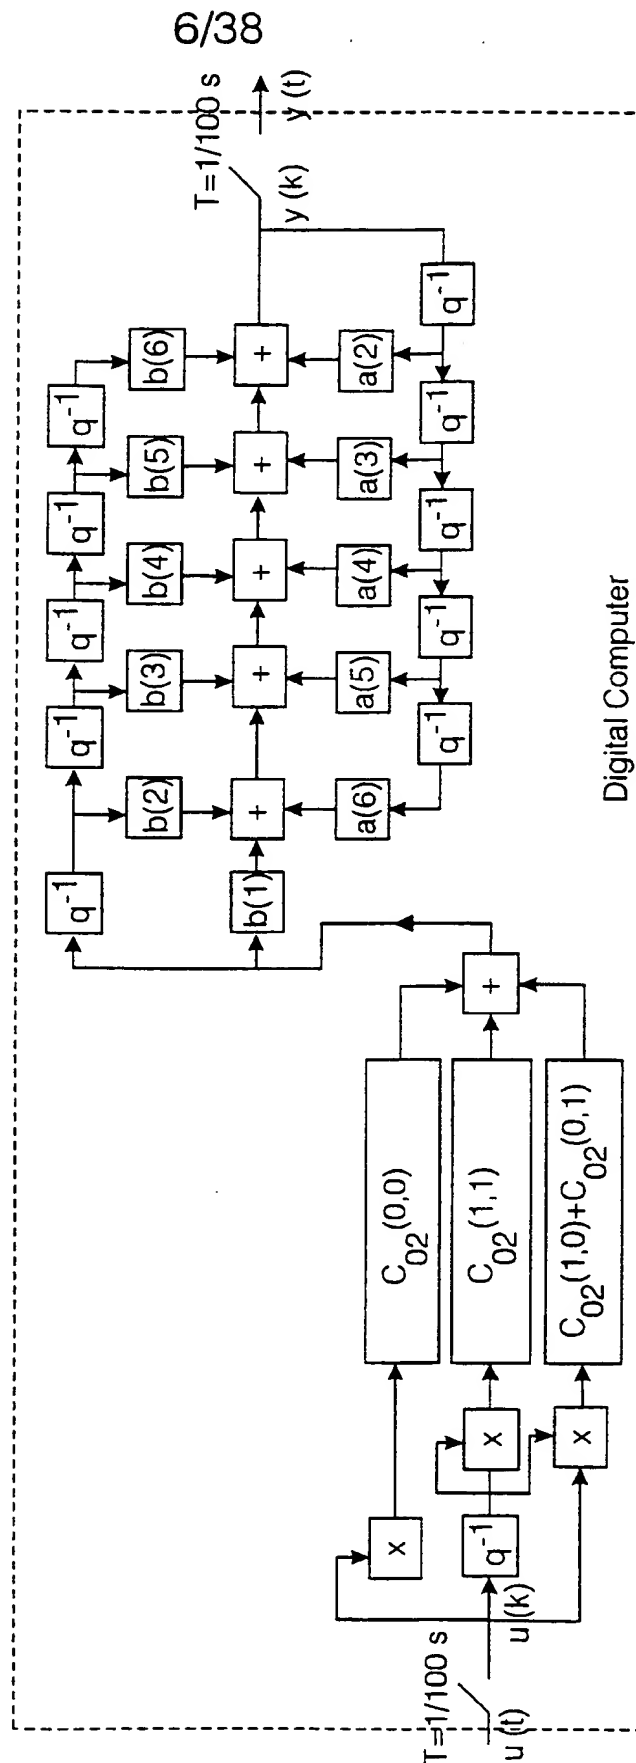


Fig. 9

7/38

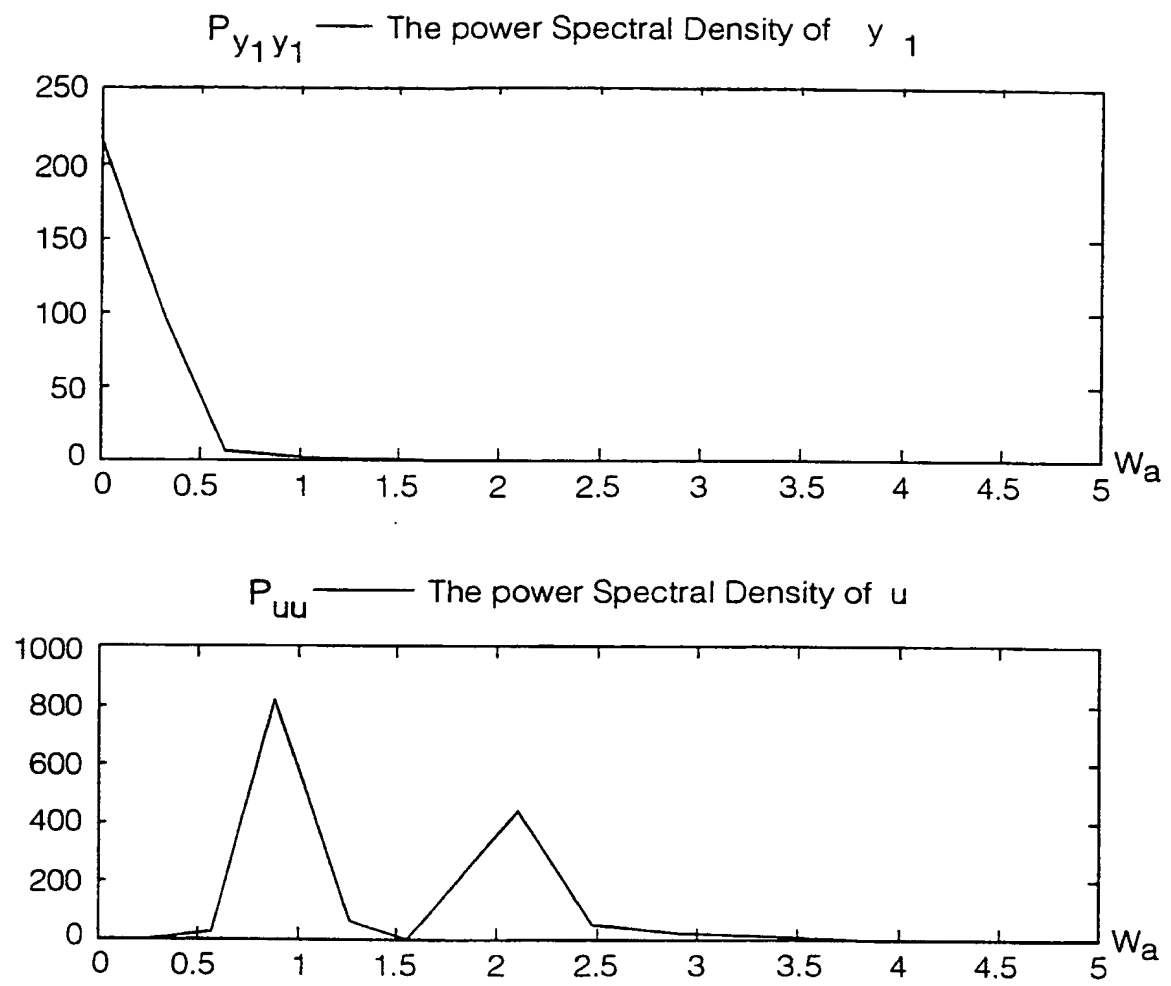


Fig. 10

8/38

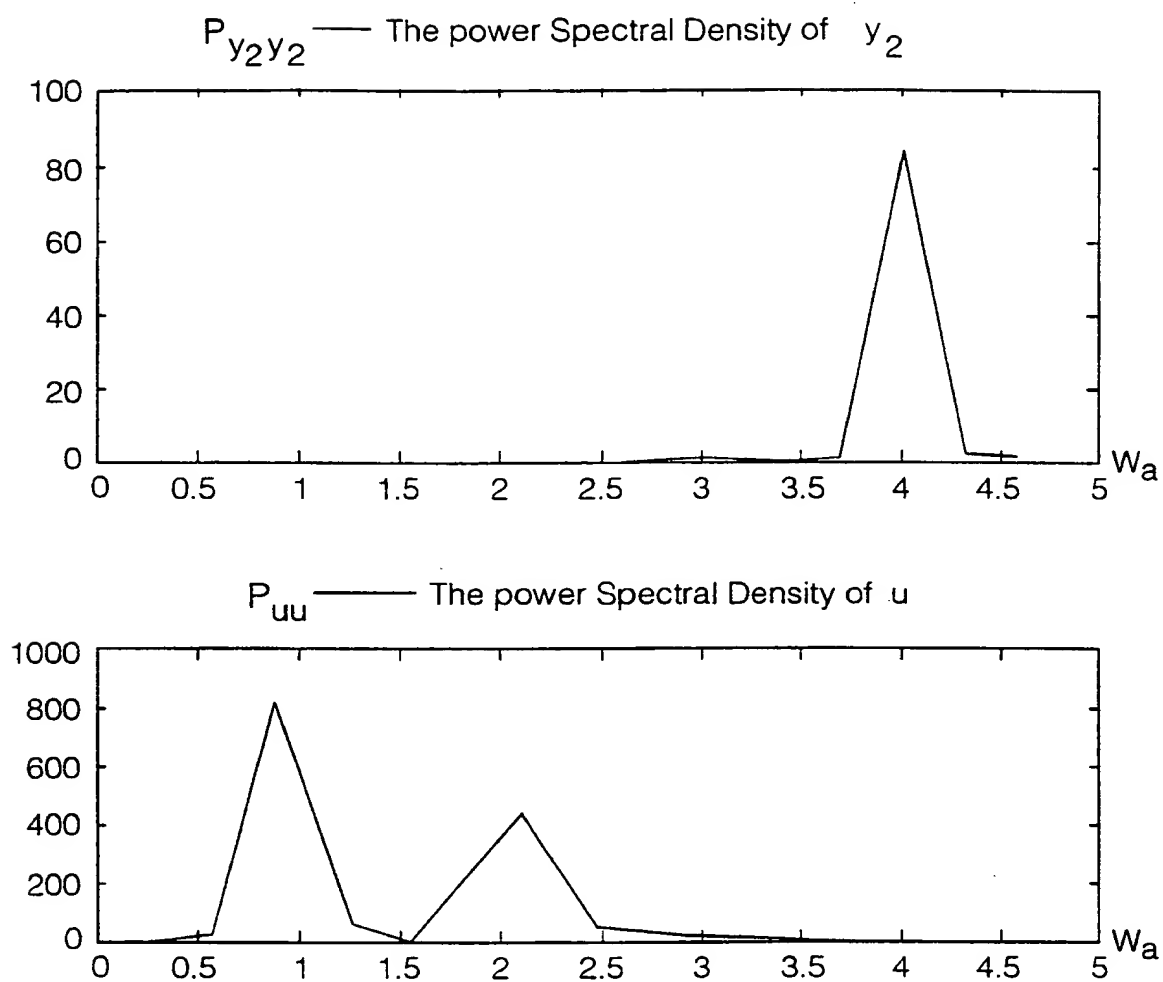


Fig. 11

9/38

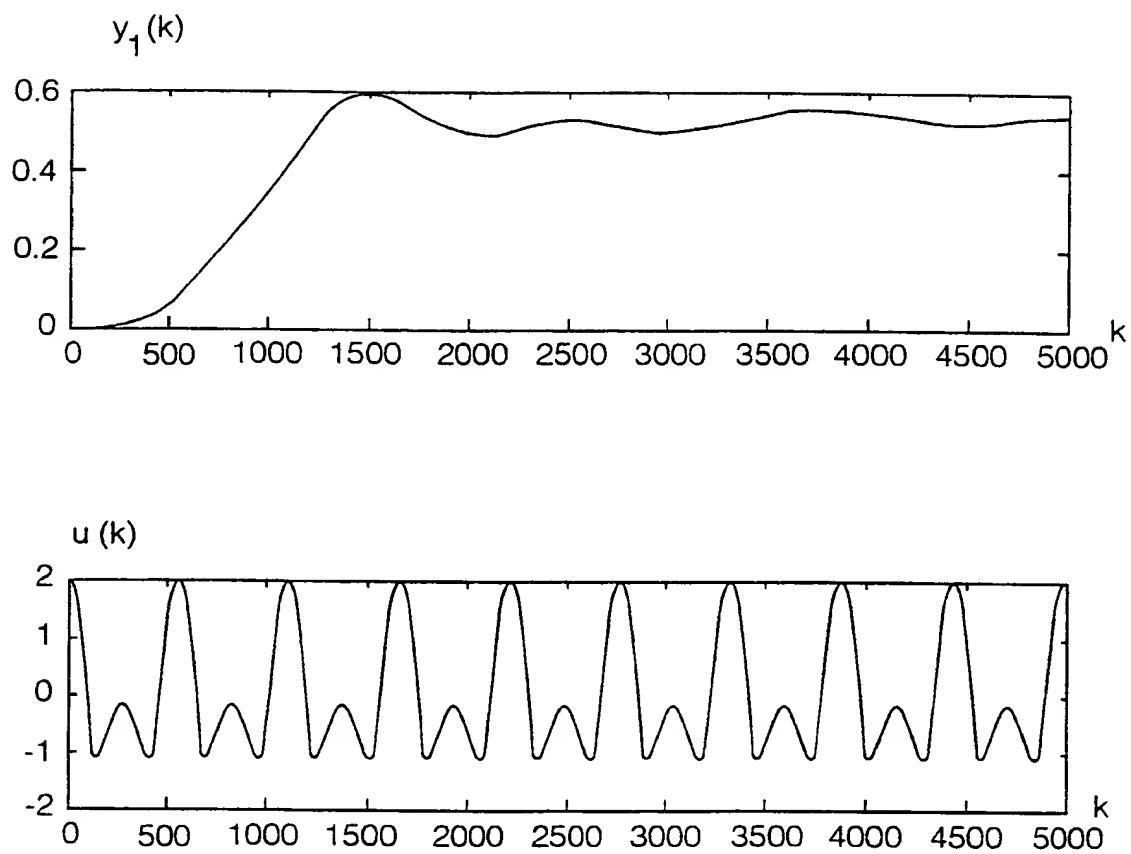


Fig. 12

10/38

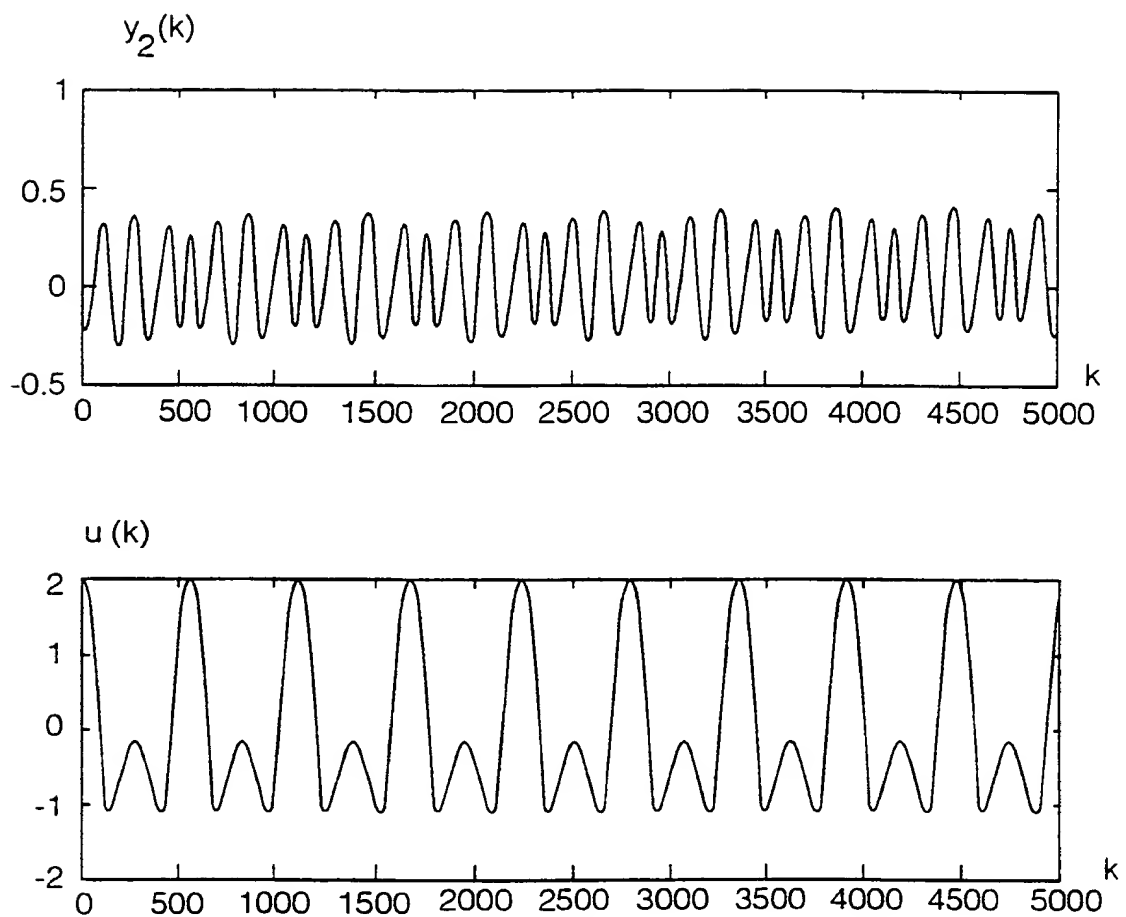


Fig. 13

11/38

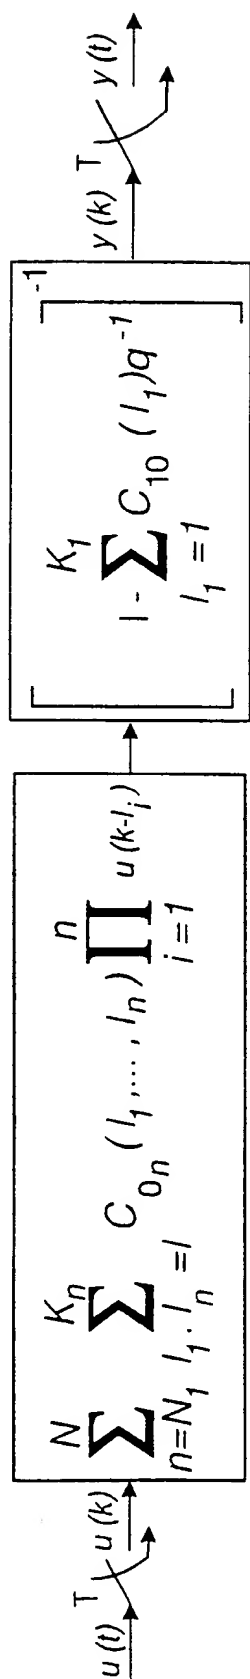


Fig. 14

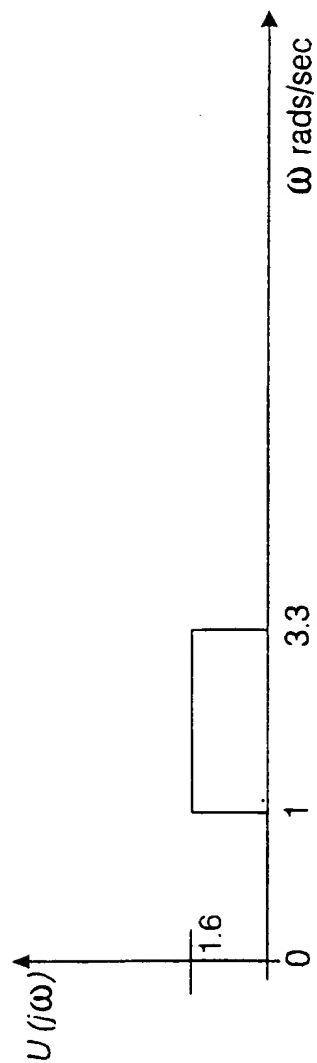


Fig. 15

12/38

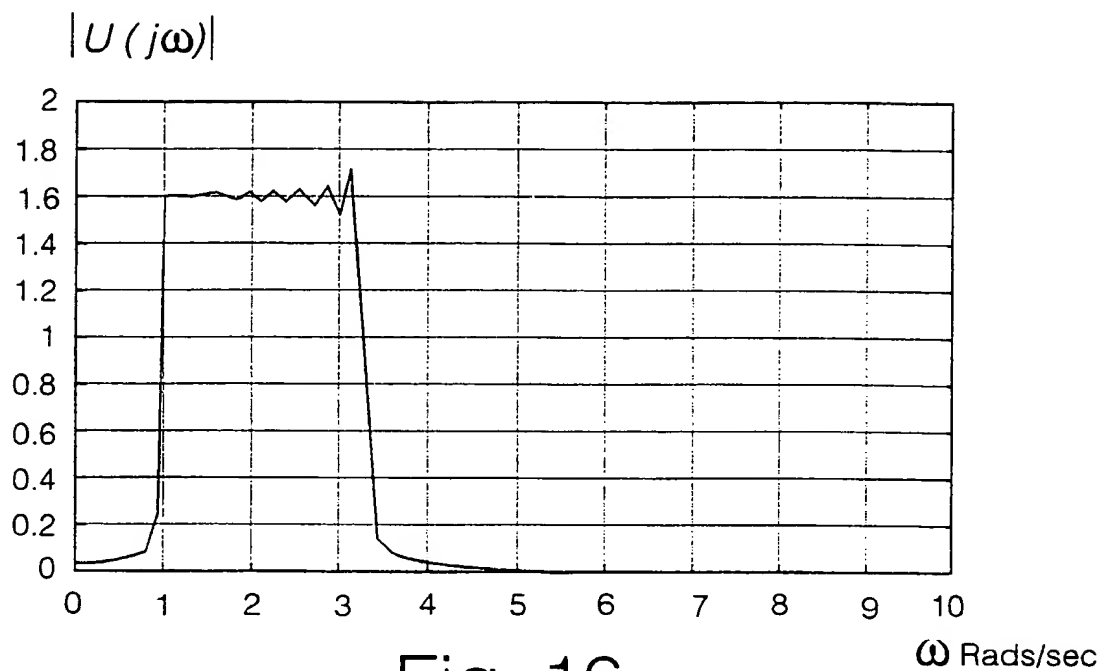


Fig. 16

$$\underbrace{|U| * \dots * |U(j\omega)|}_R \quad \text{for } n = 2 \text{ and } 3$$

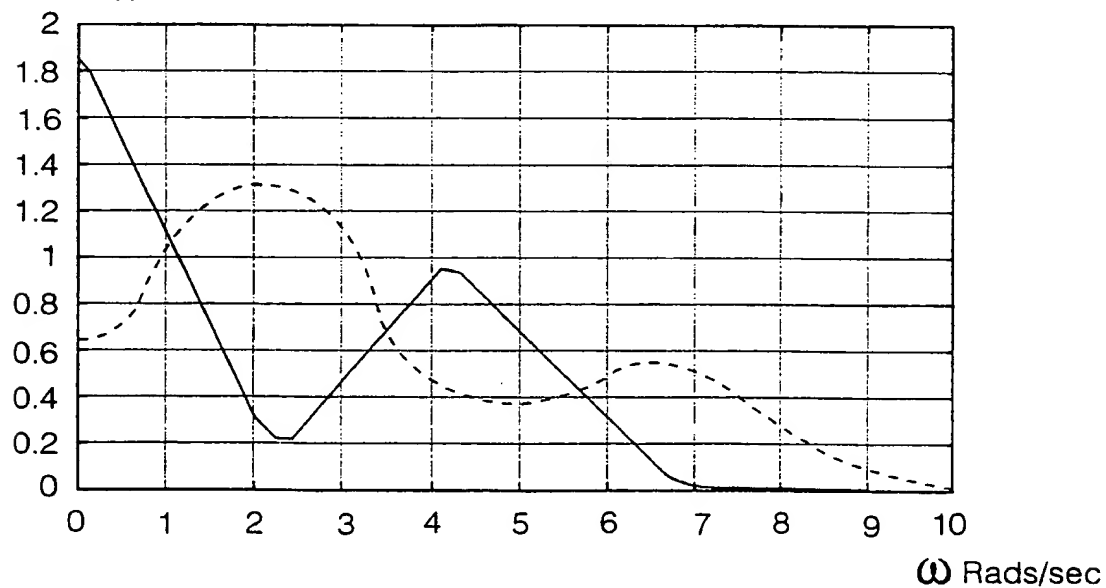


Fig. 17

13/38

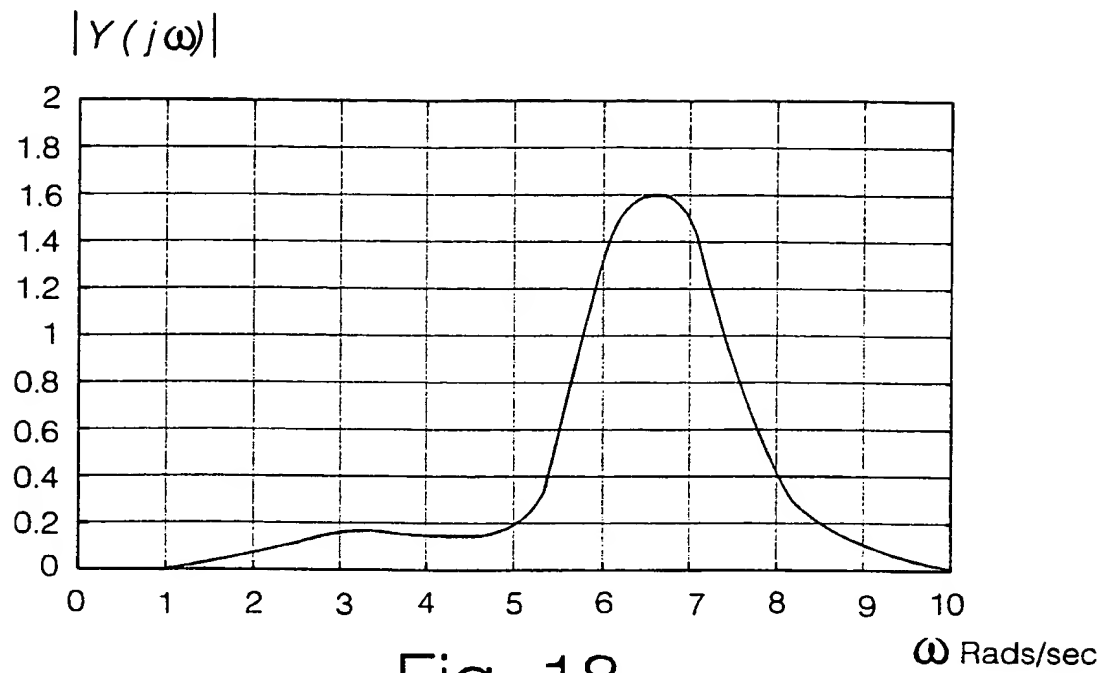


Fig. 18

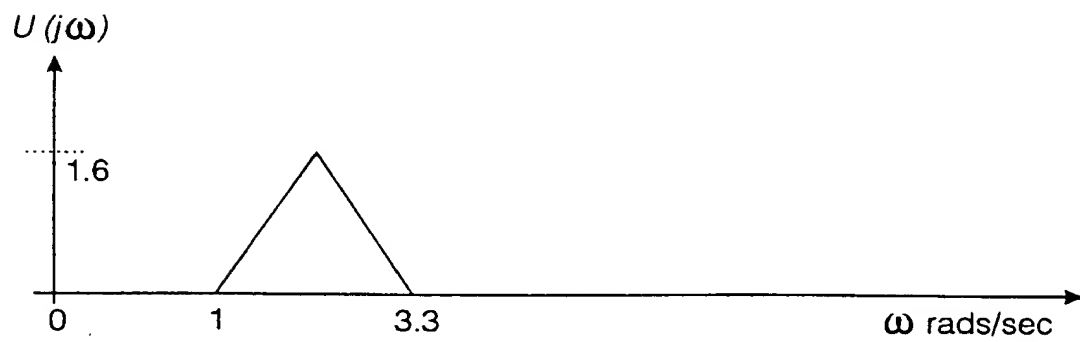


Fig. 19

14/38

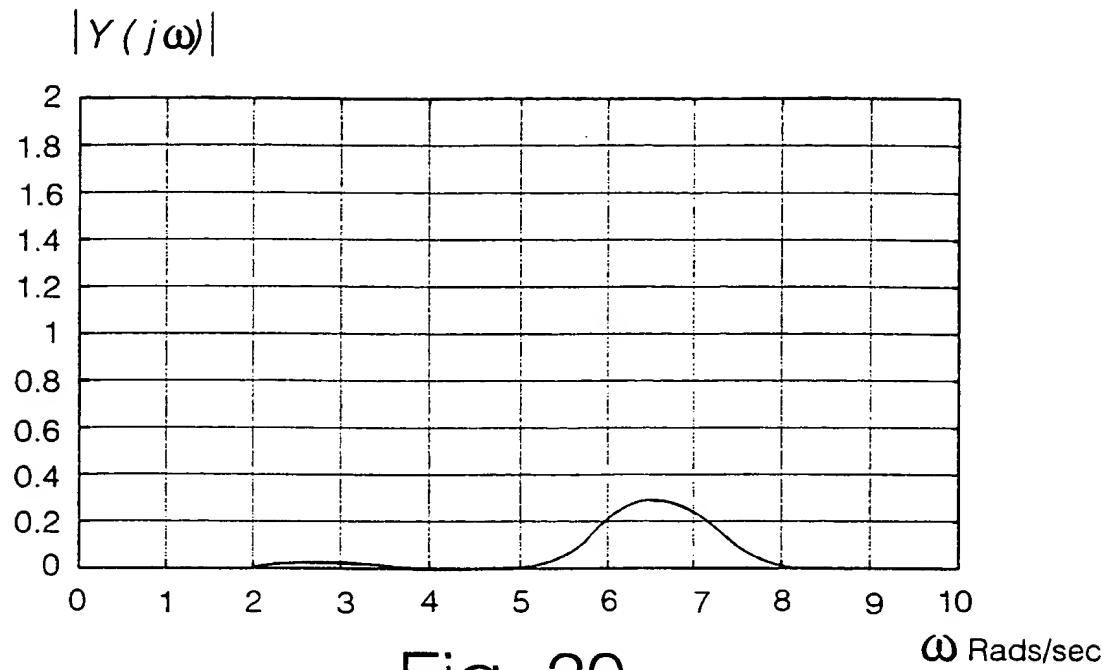


Fig. 20

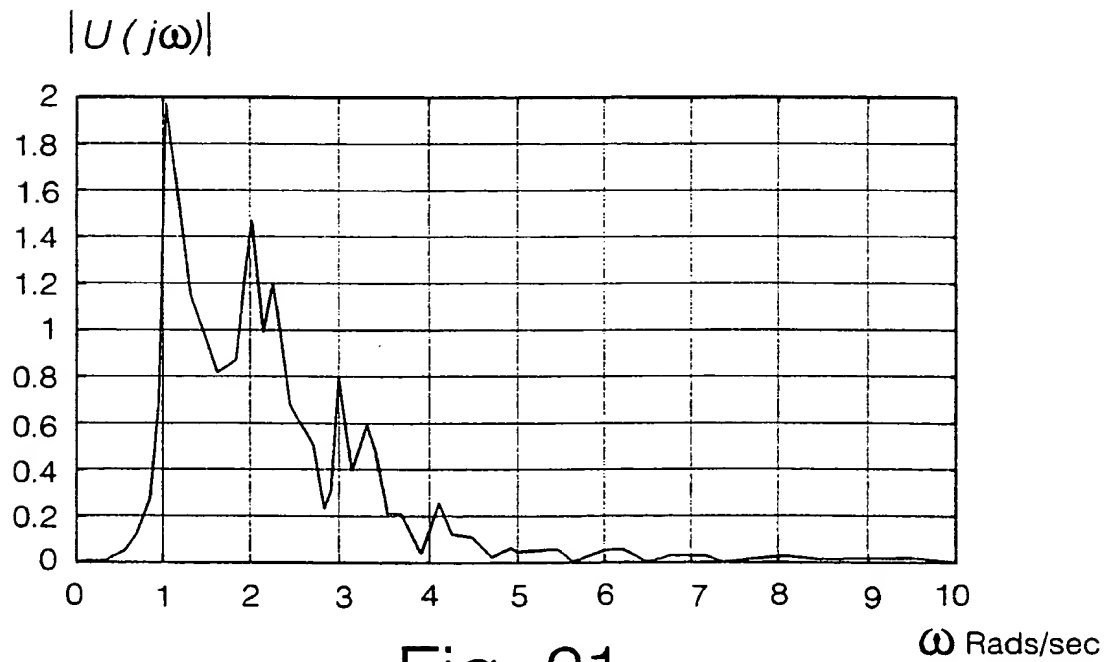


Fig. 21

15/38

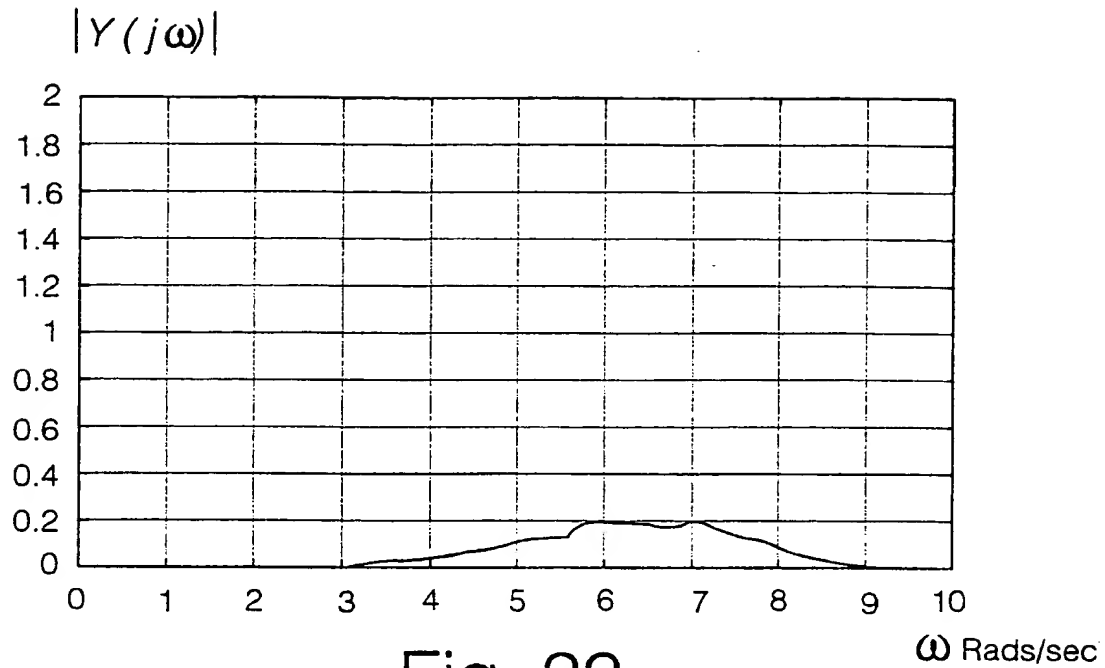


Fig. 22

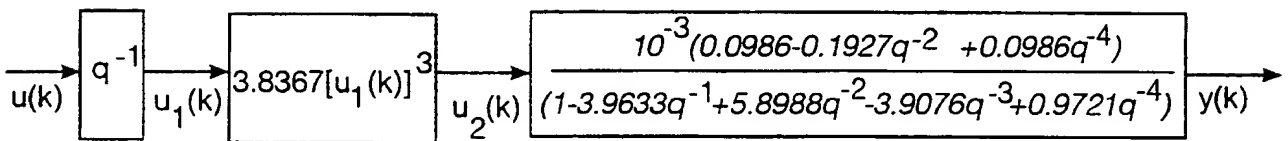


Fig. 23

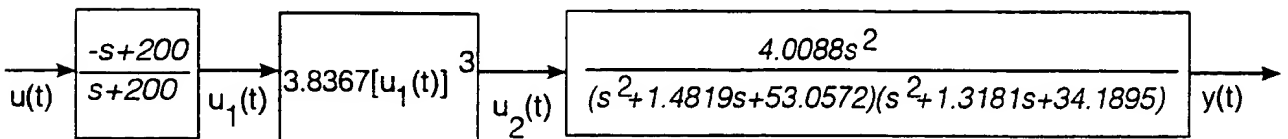


Fig. 24

16/38

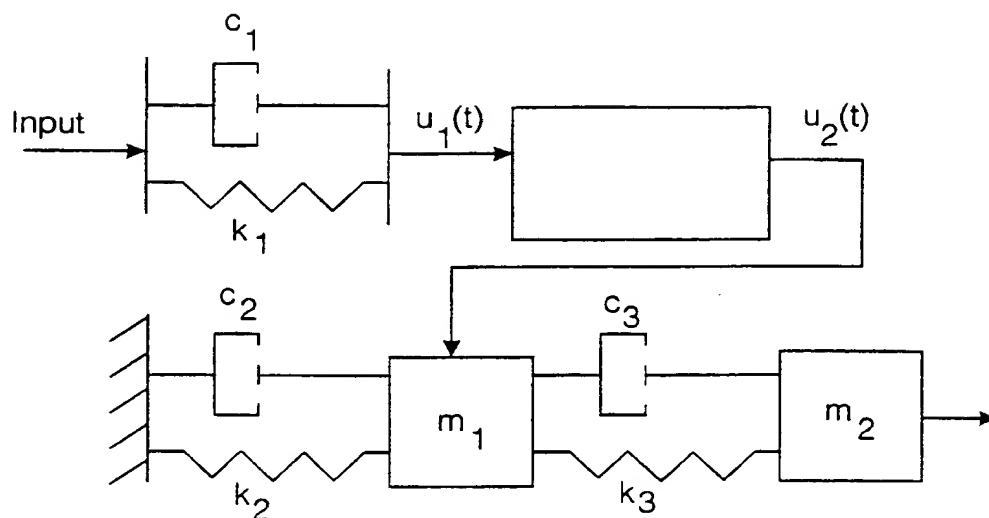


Fig. 25

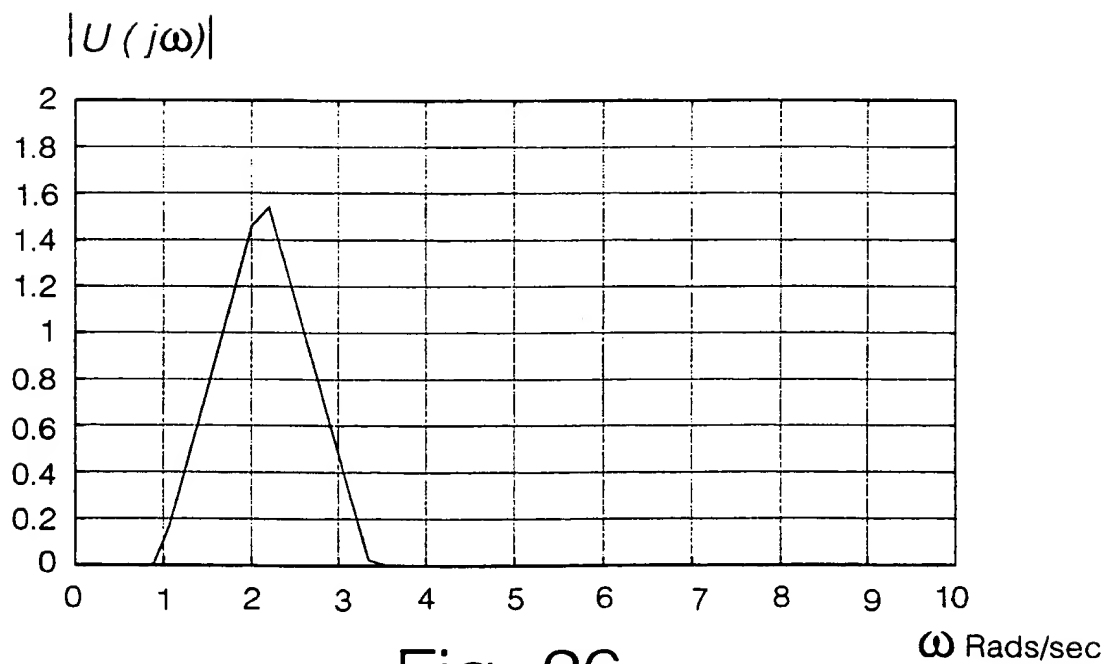


Fig. 26

17/38

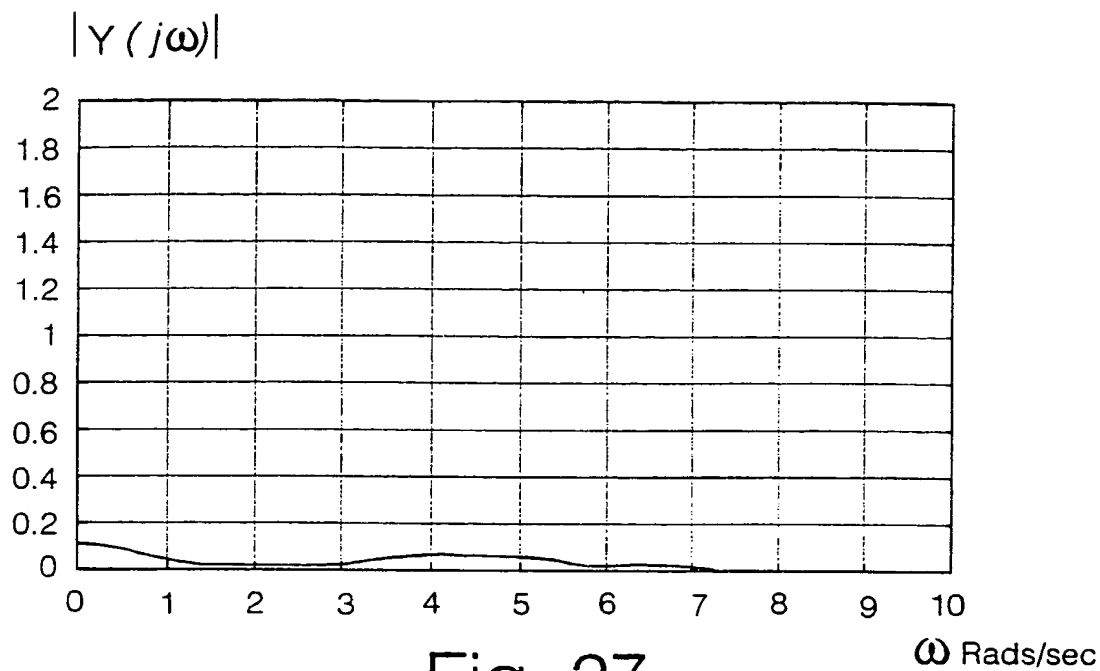


Fig. 27

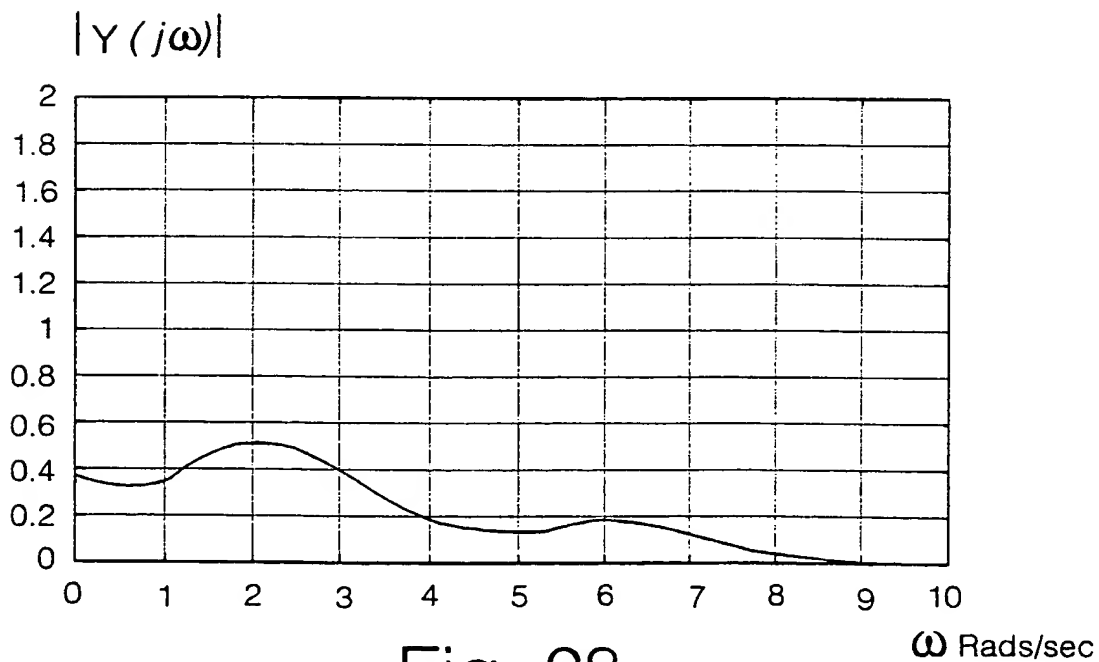


Fig. 28

18/38

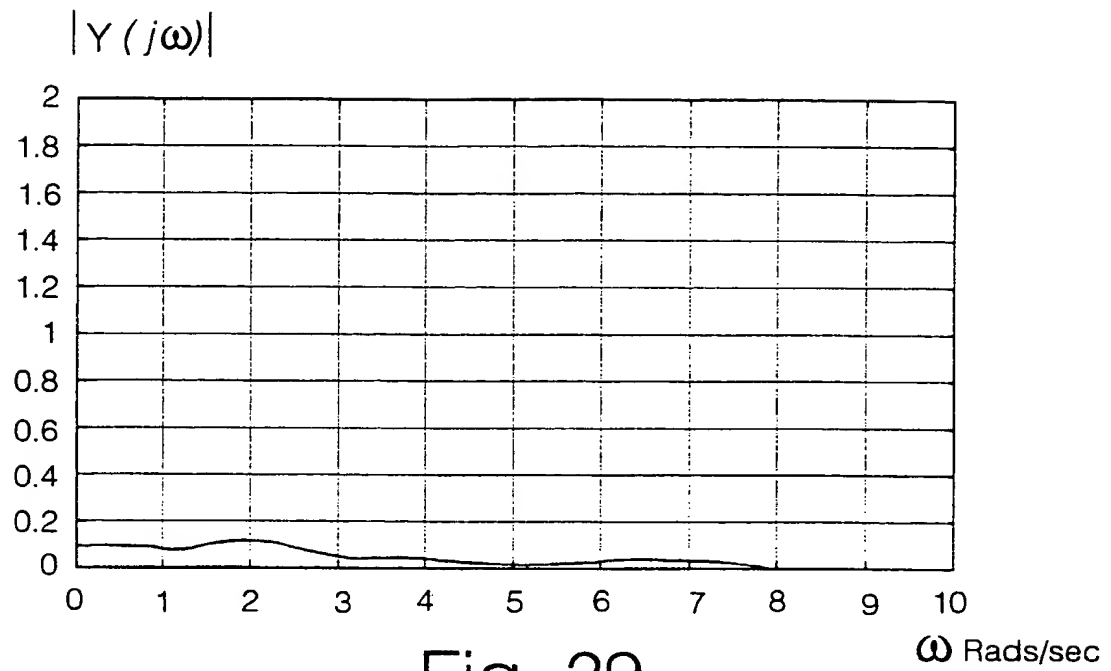


Fig. 29

19/38



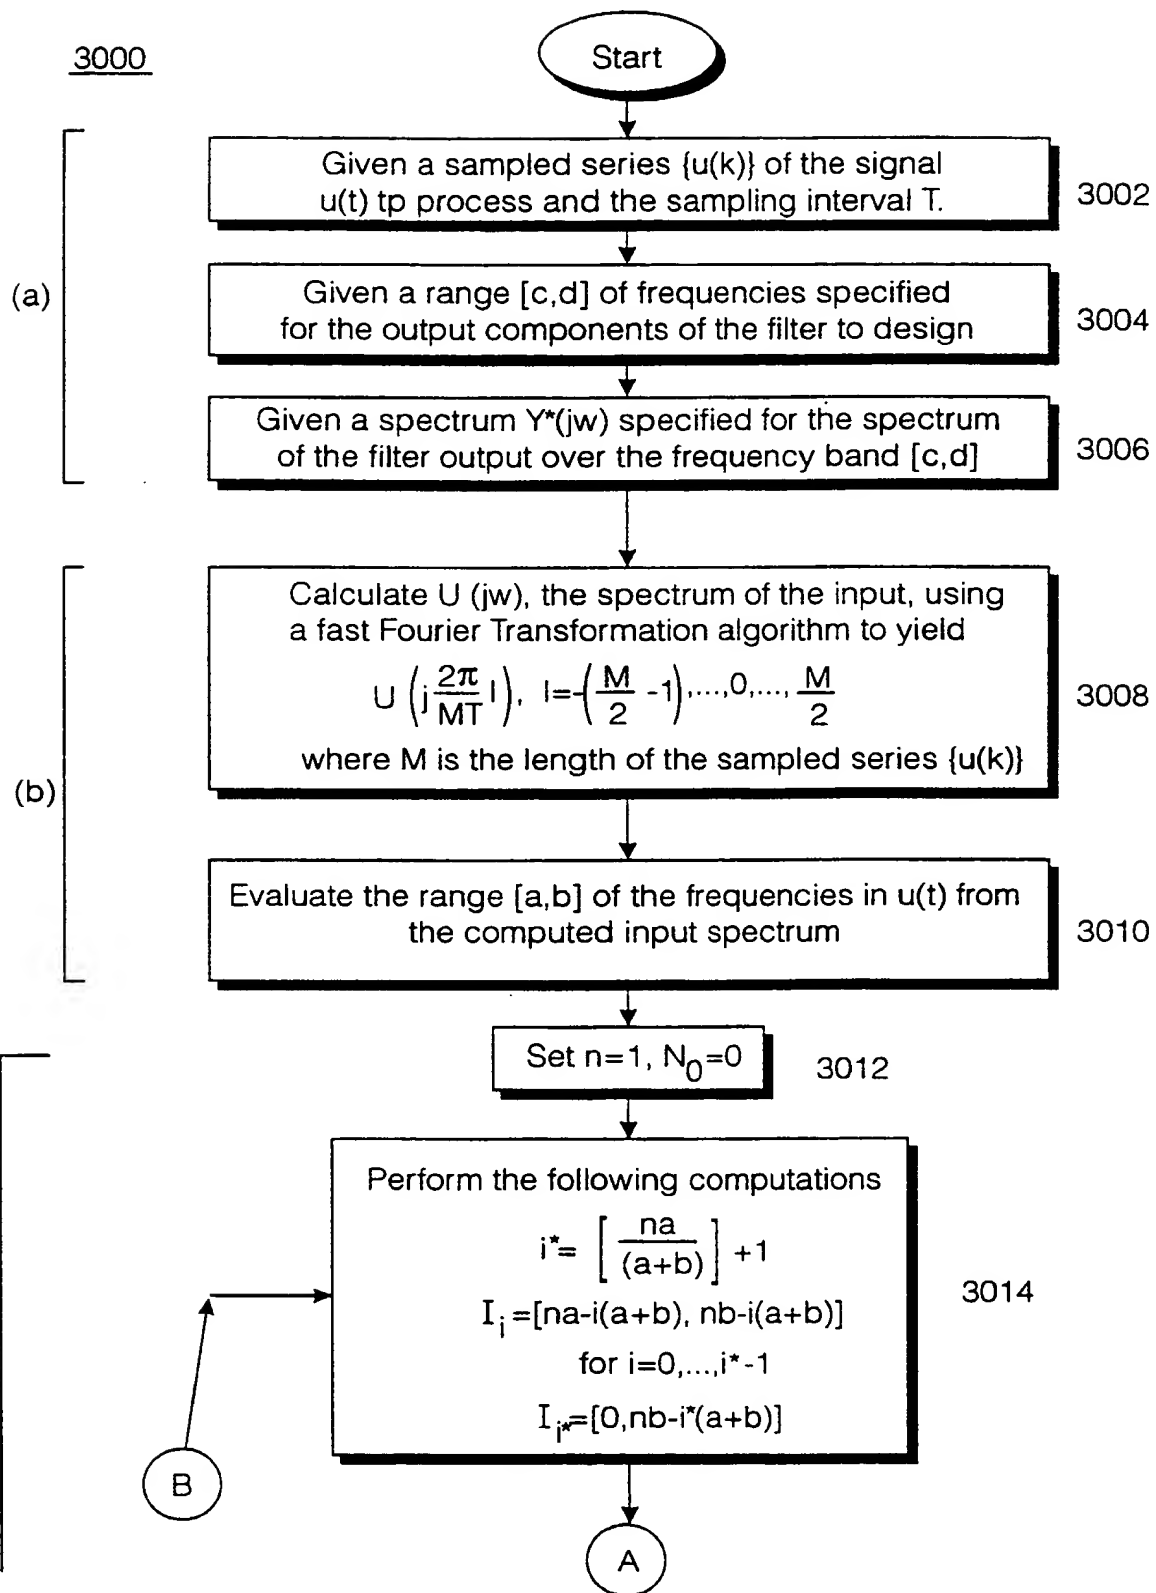


Fig. 30

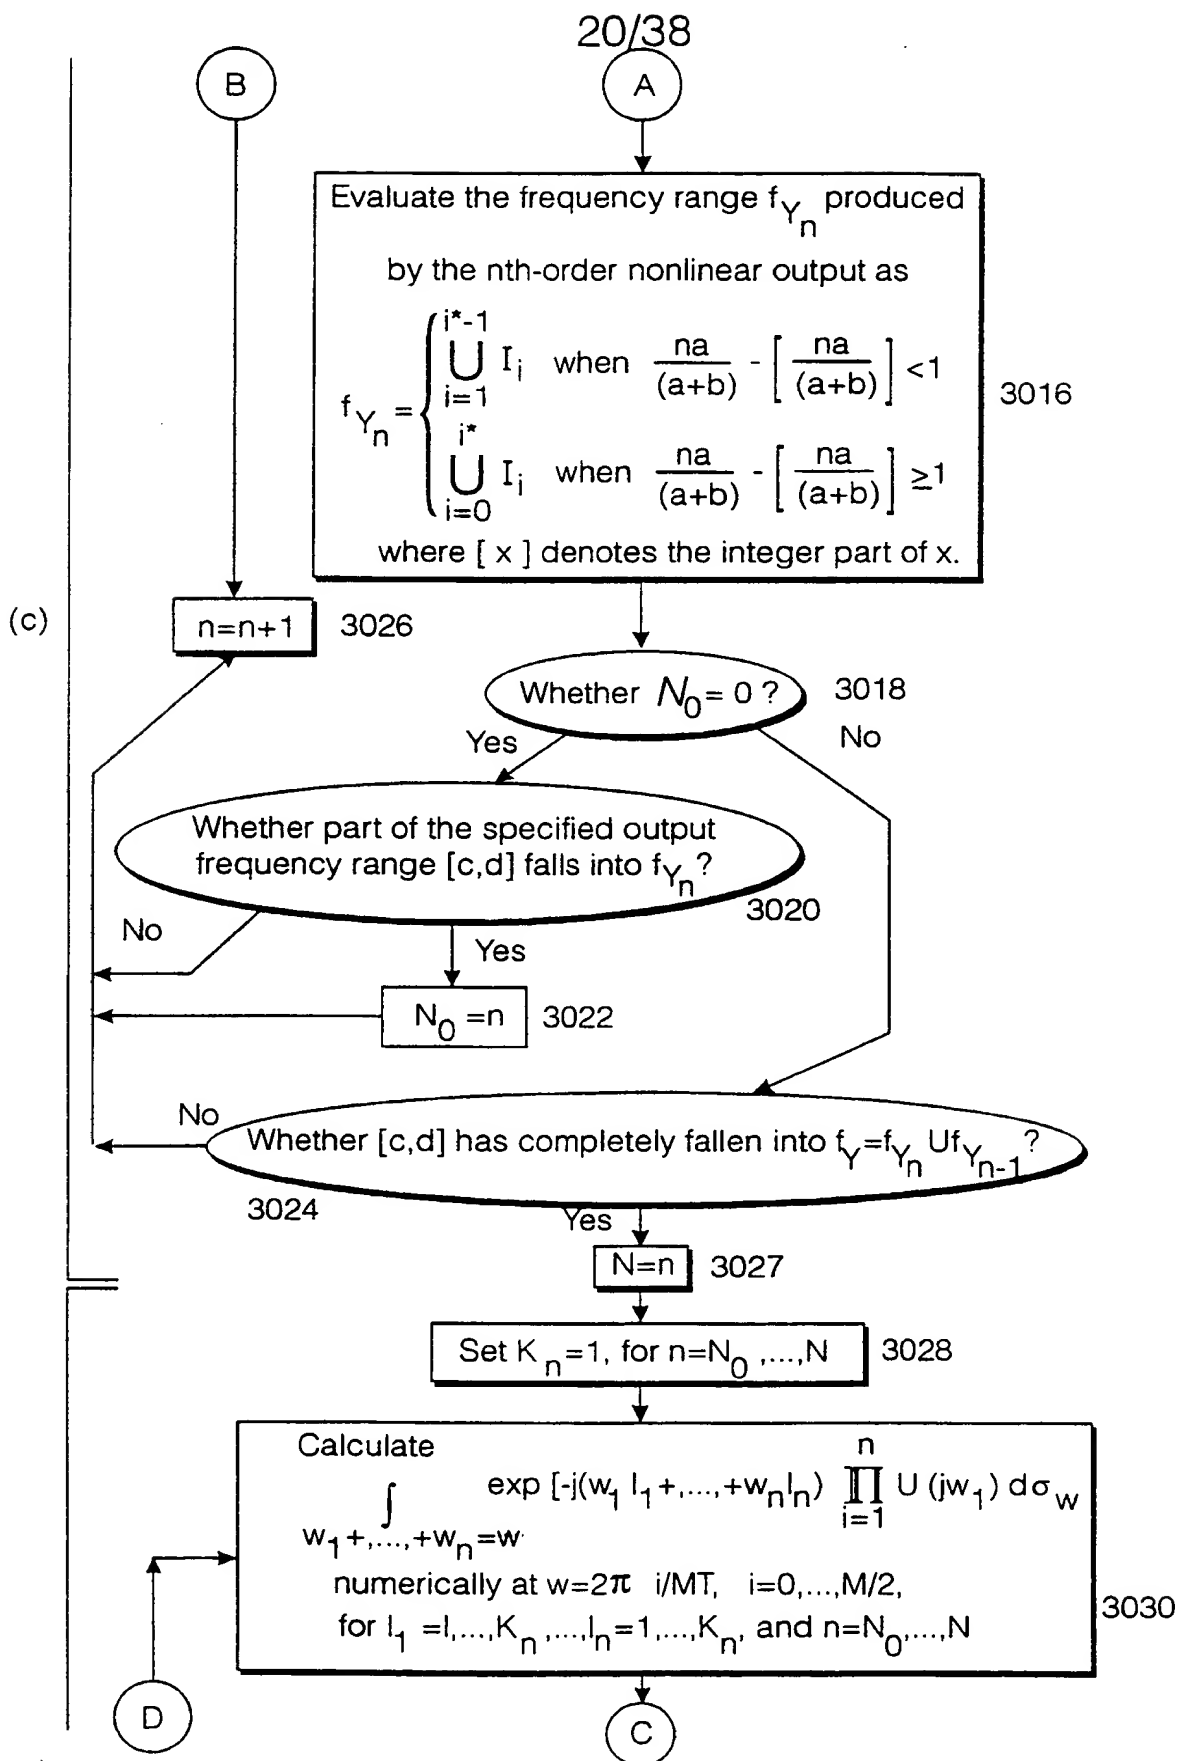

21/38

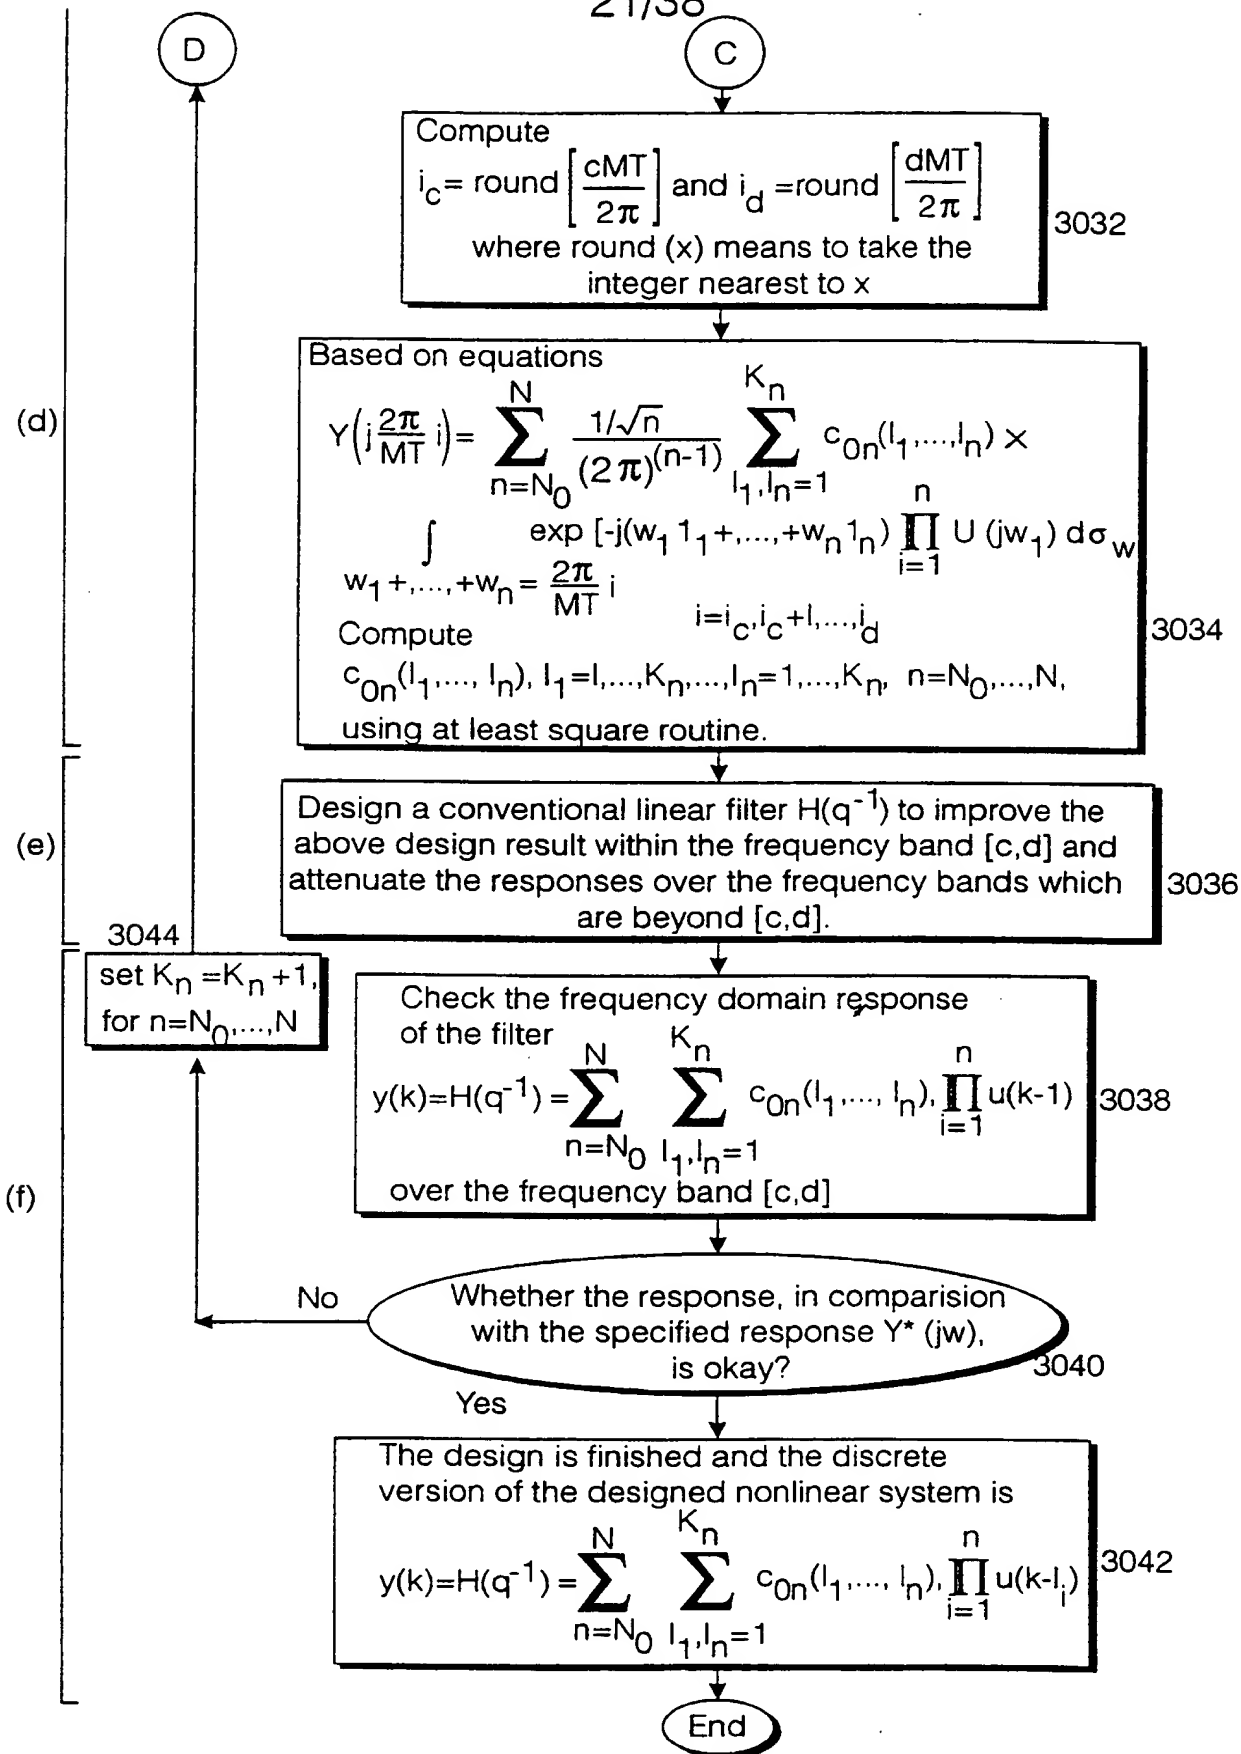

22/38



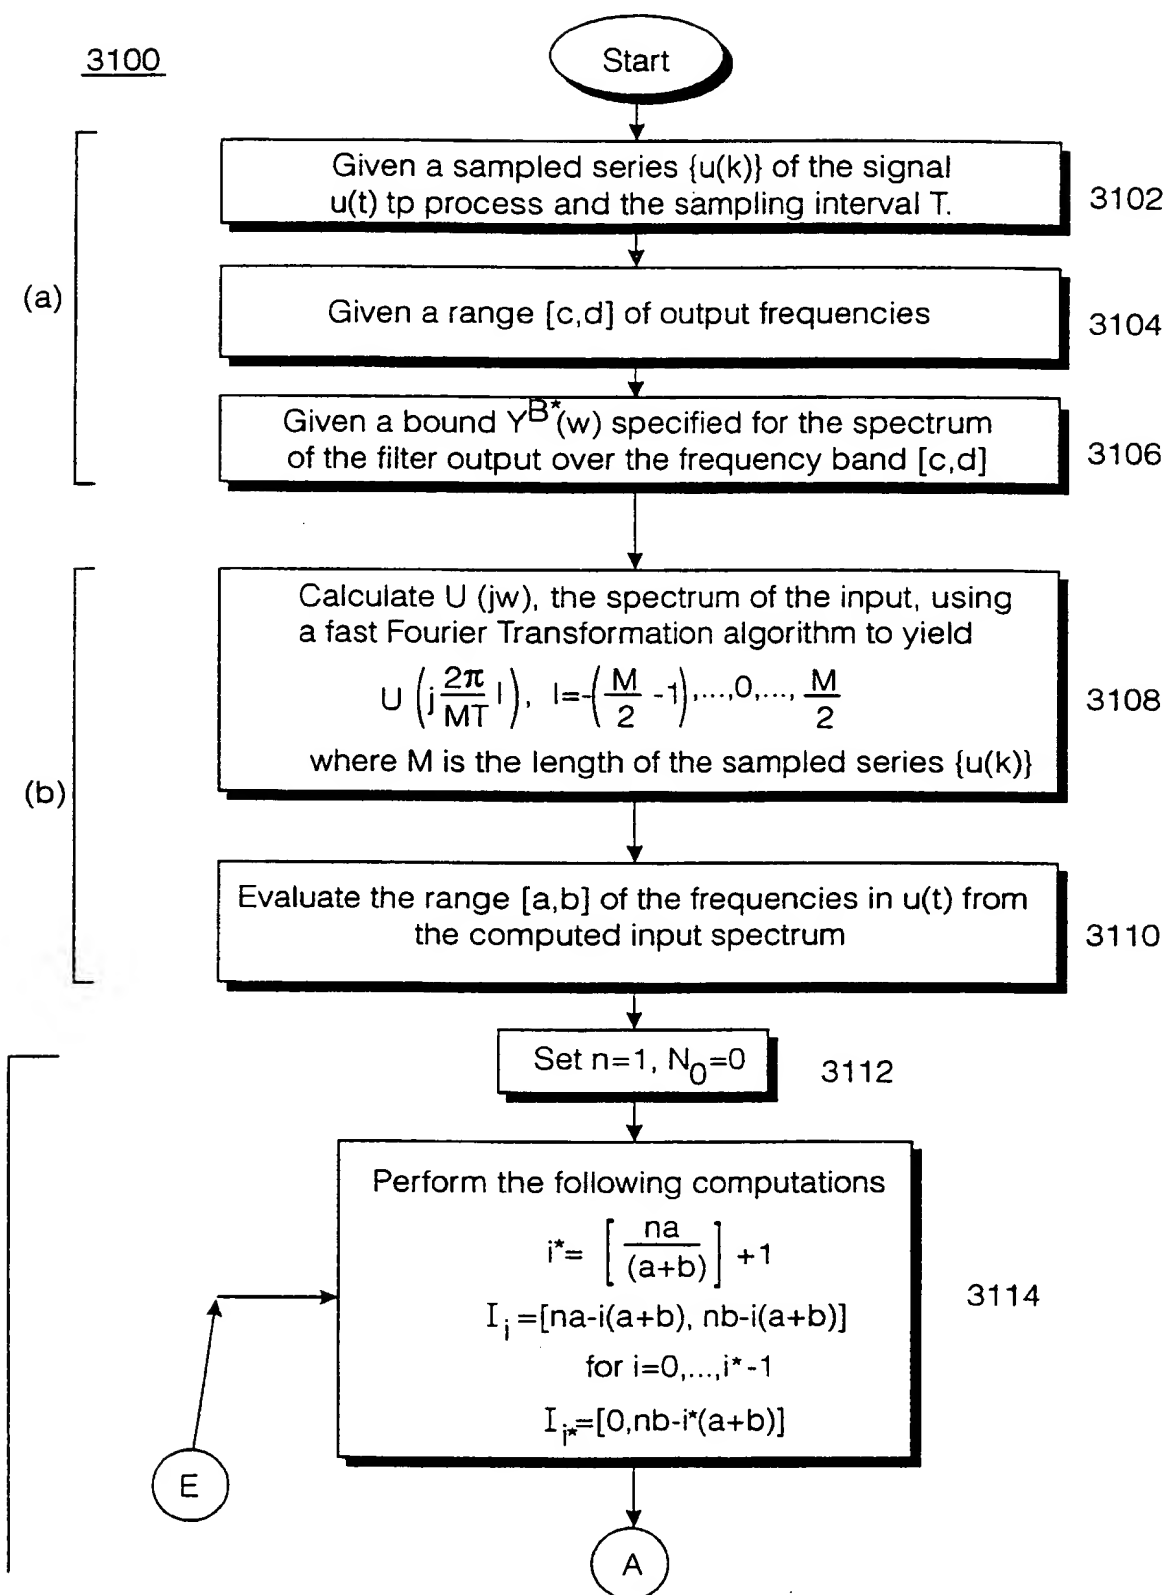


Fig. 31


23/38

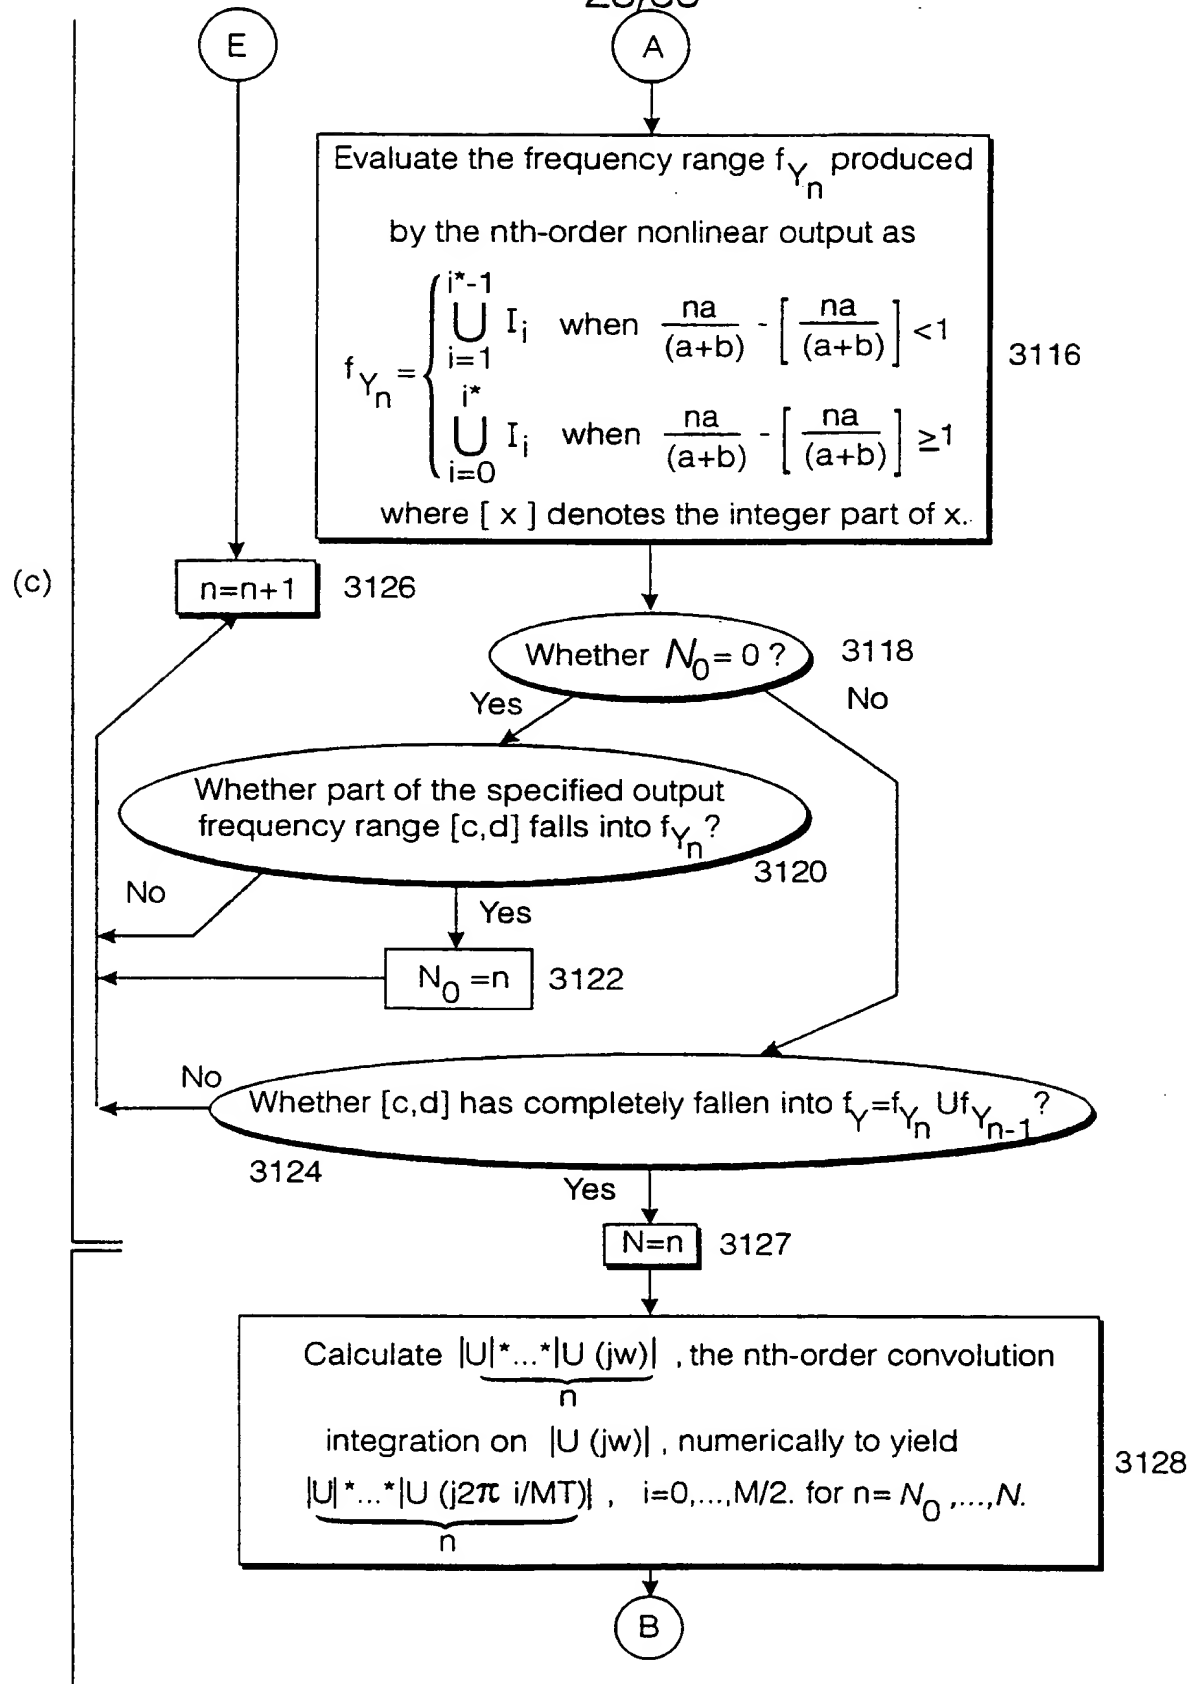

24/38

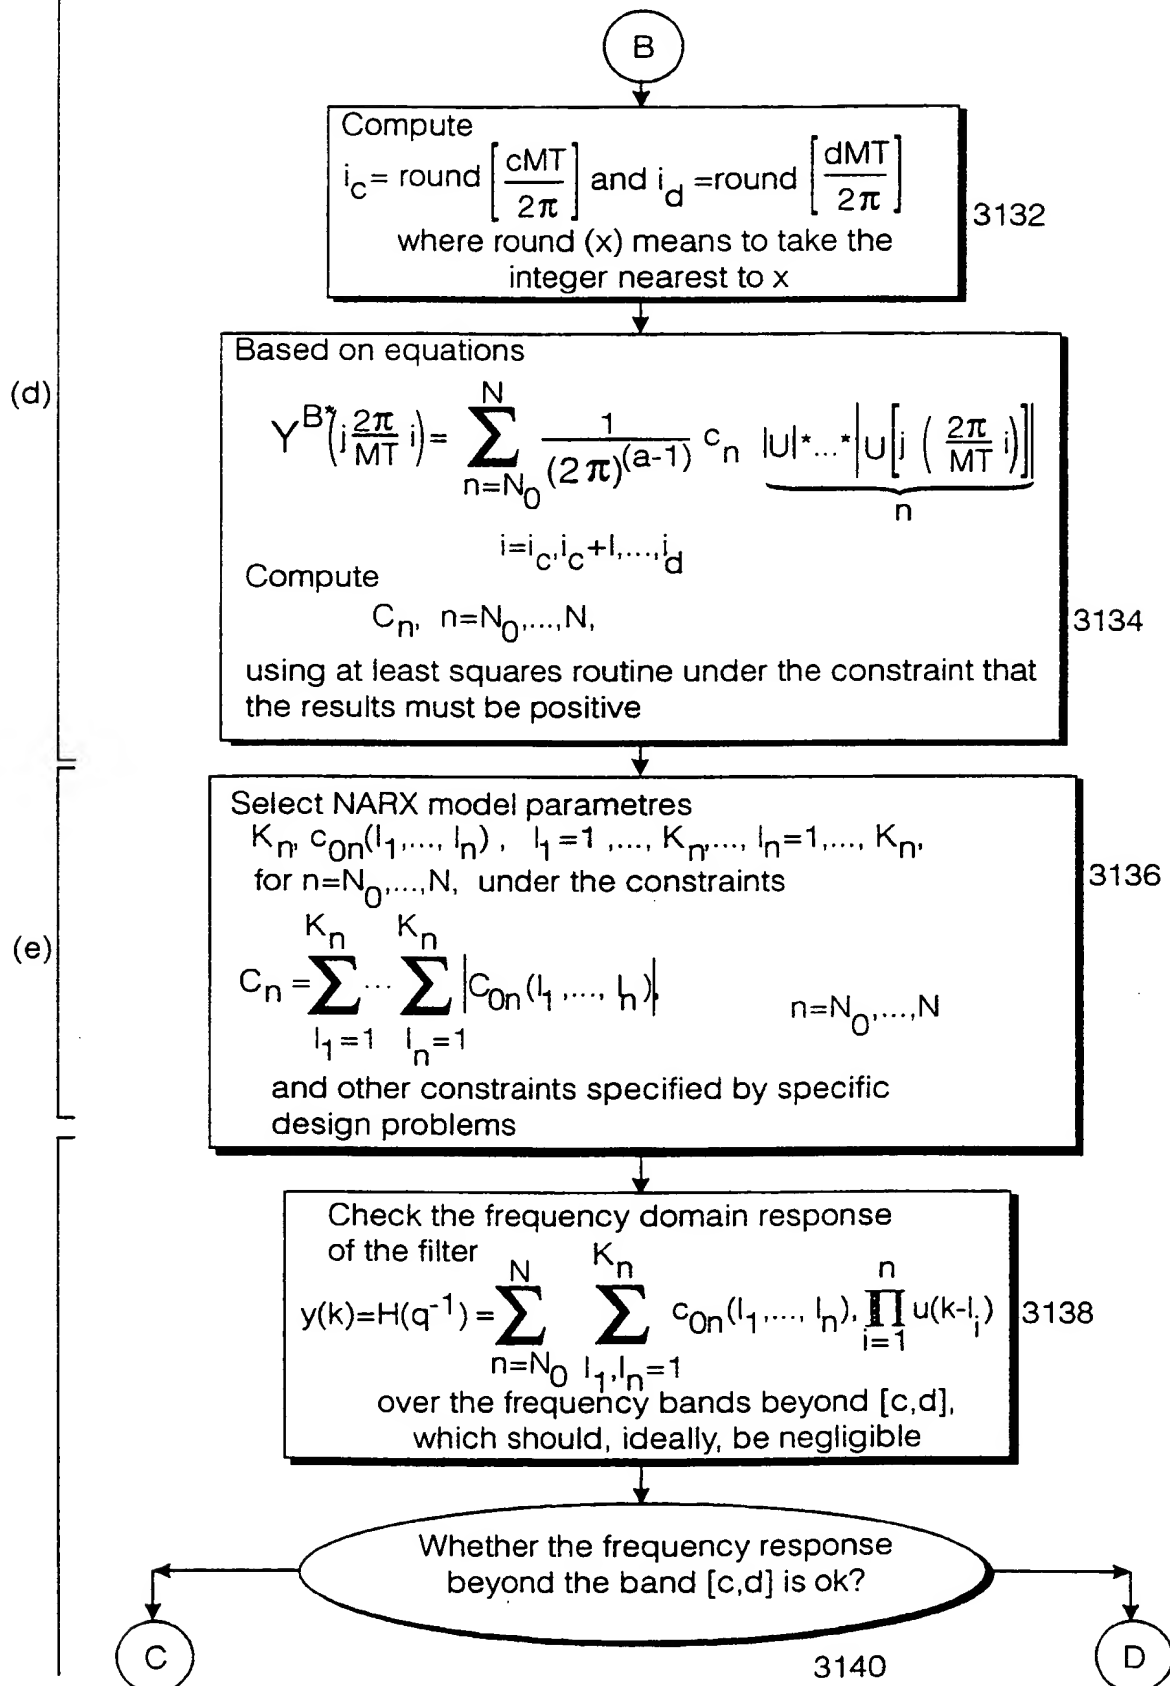

25/38

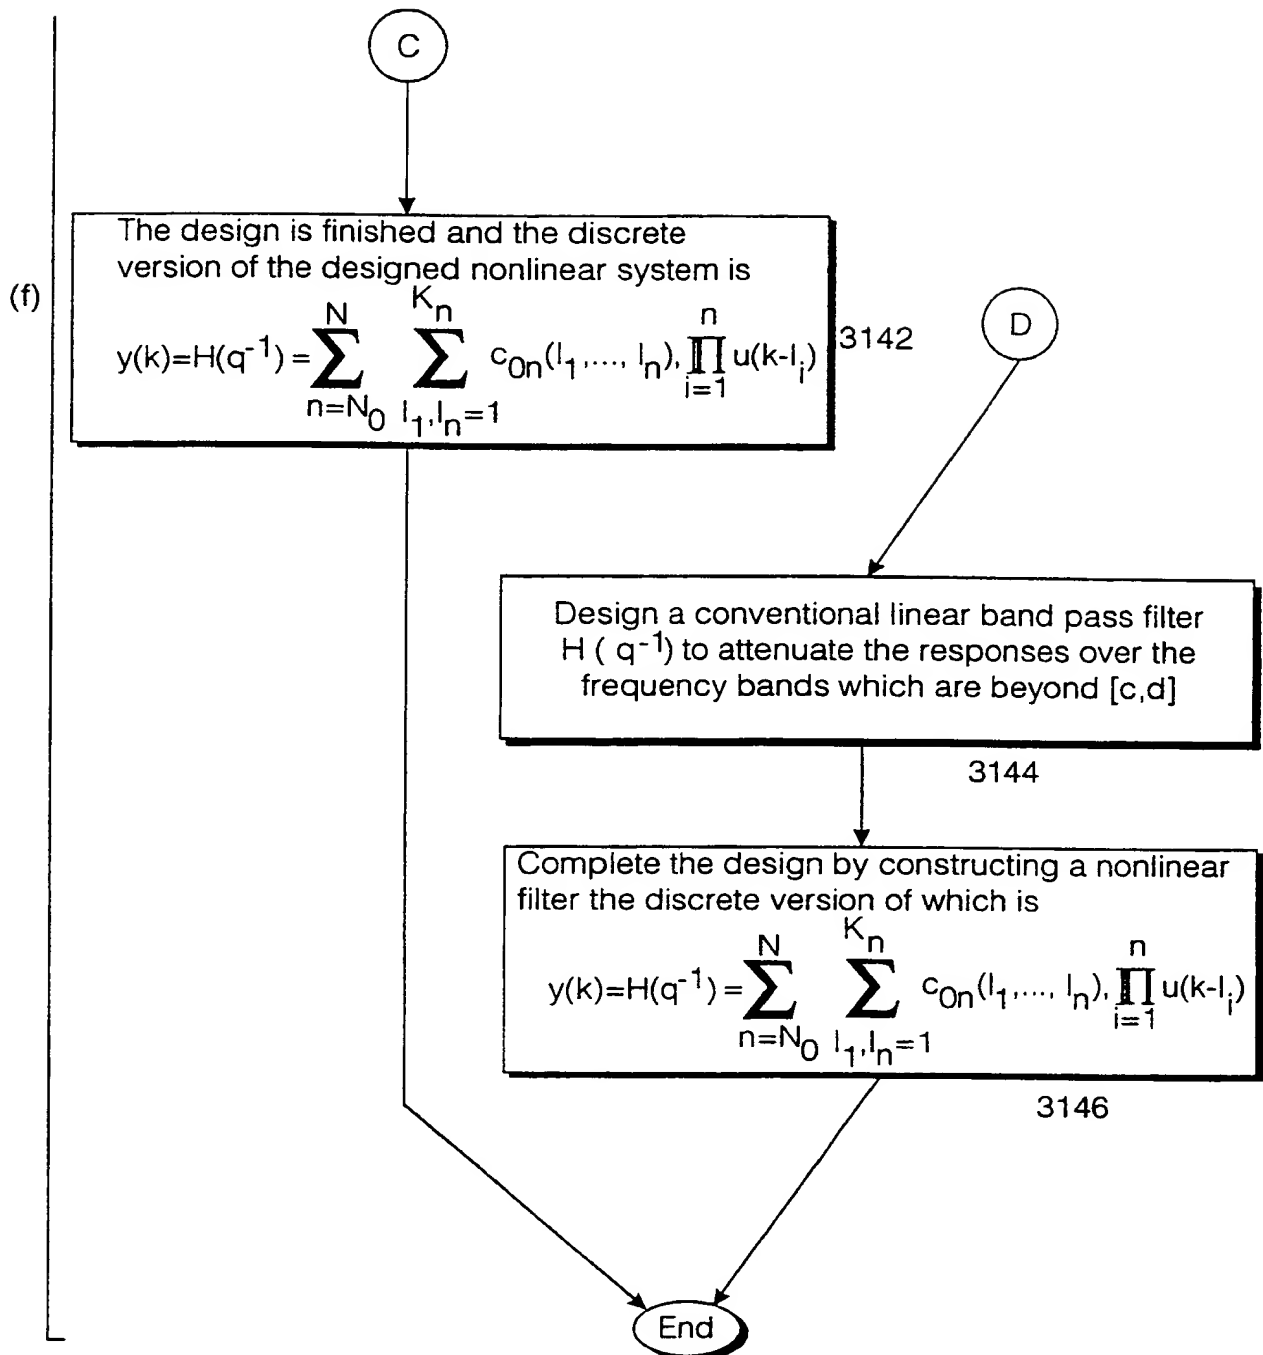

26/38


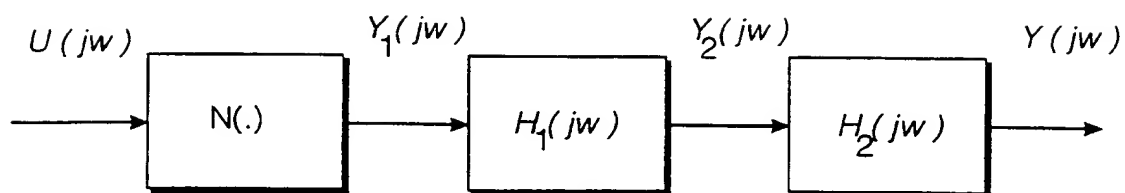


Fig. 32

27/38

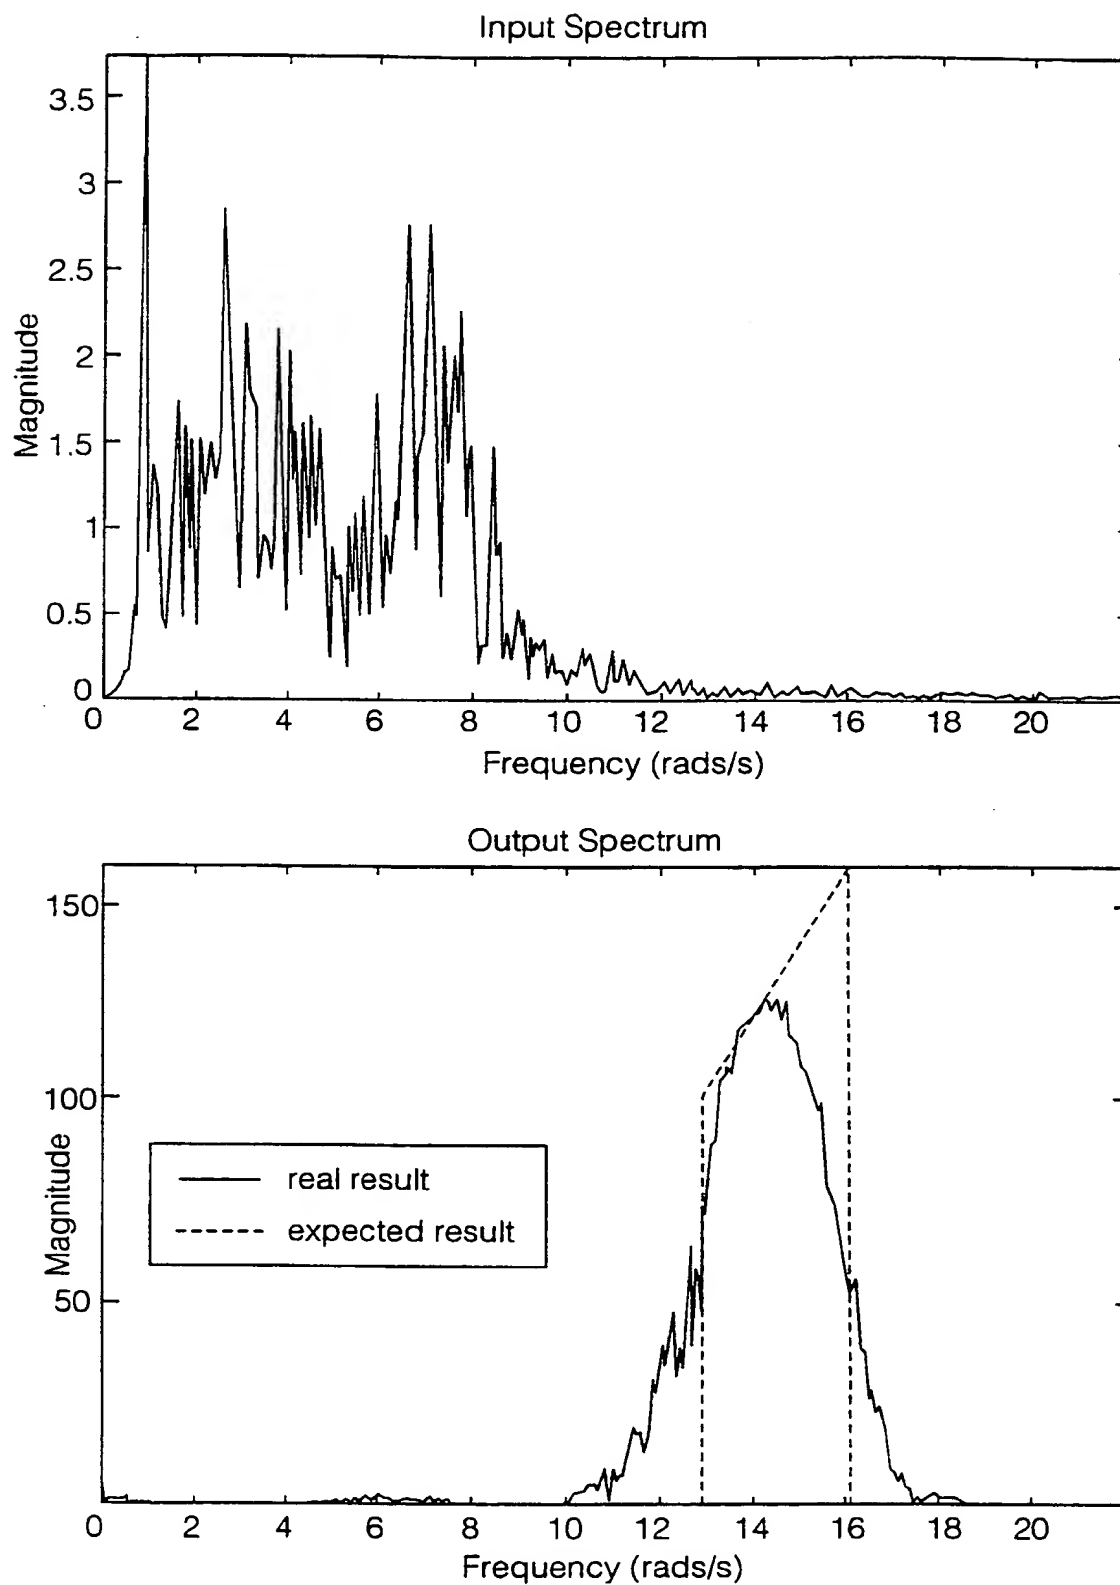

28/38

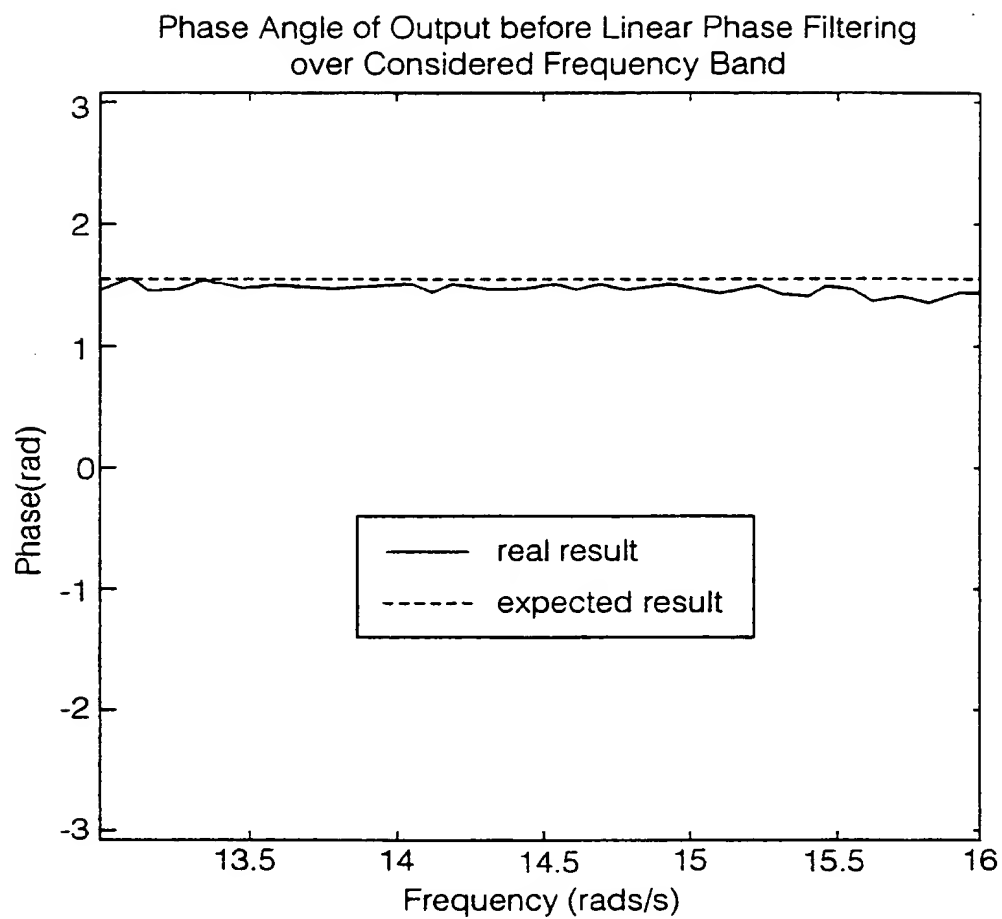


Fig. 34

29/38

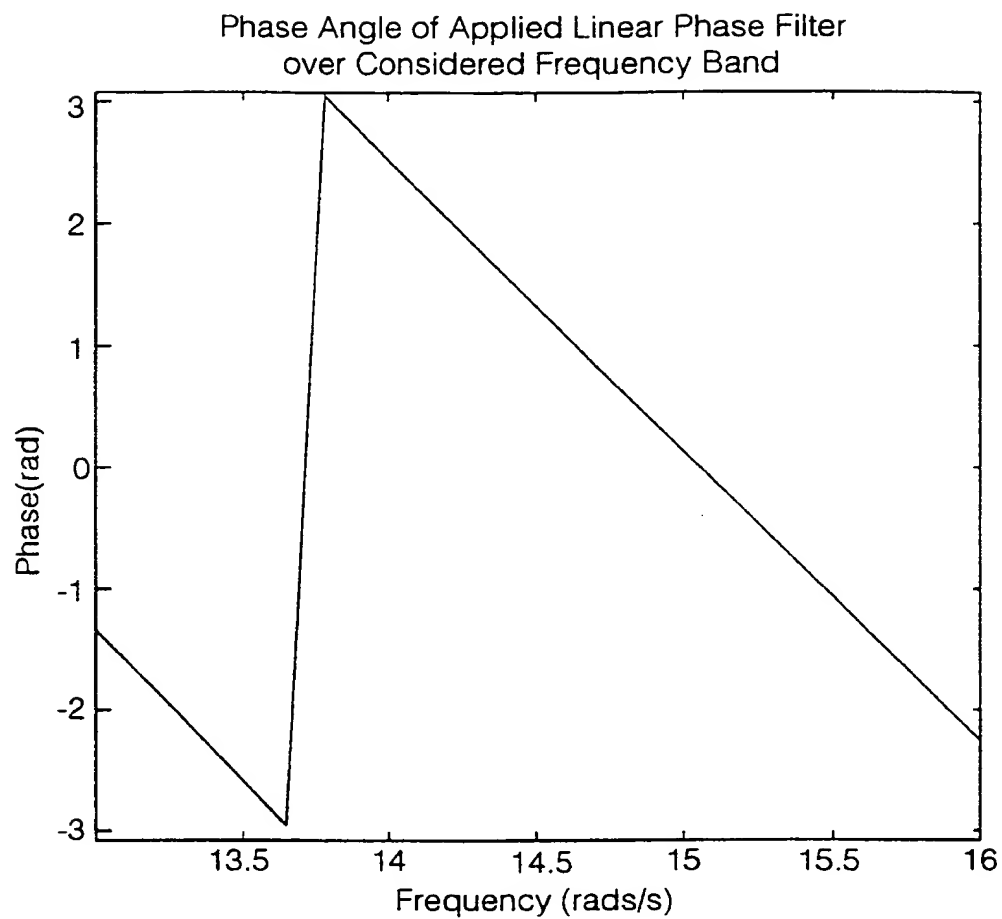


Fig. 35

30/38

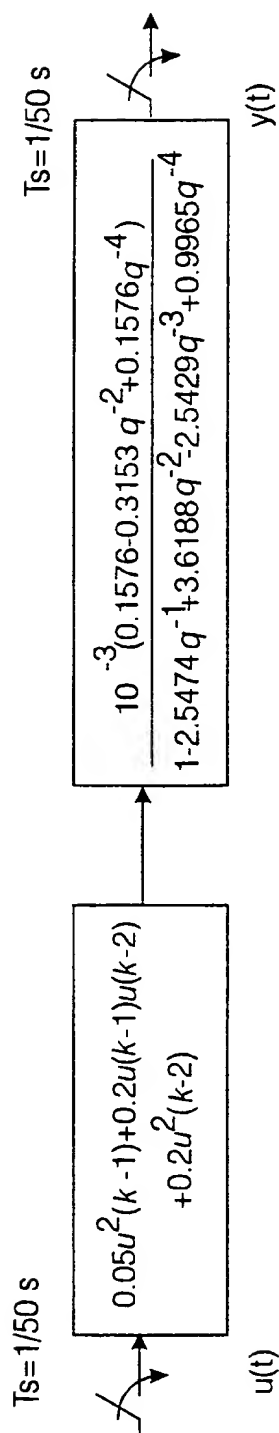


Fig. 36

31/38

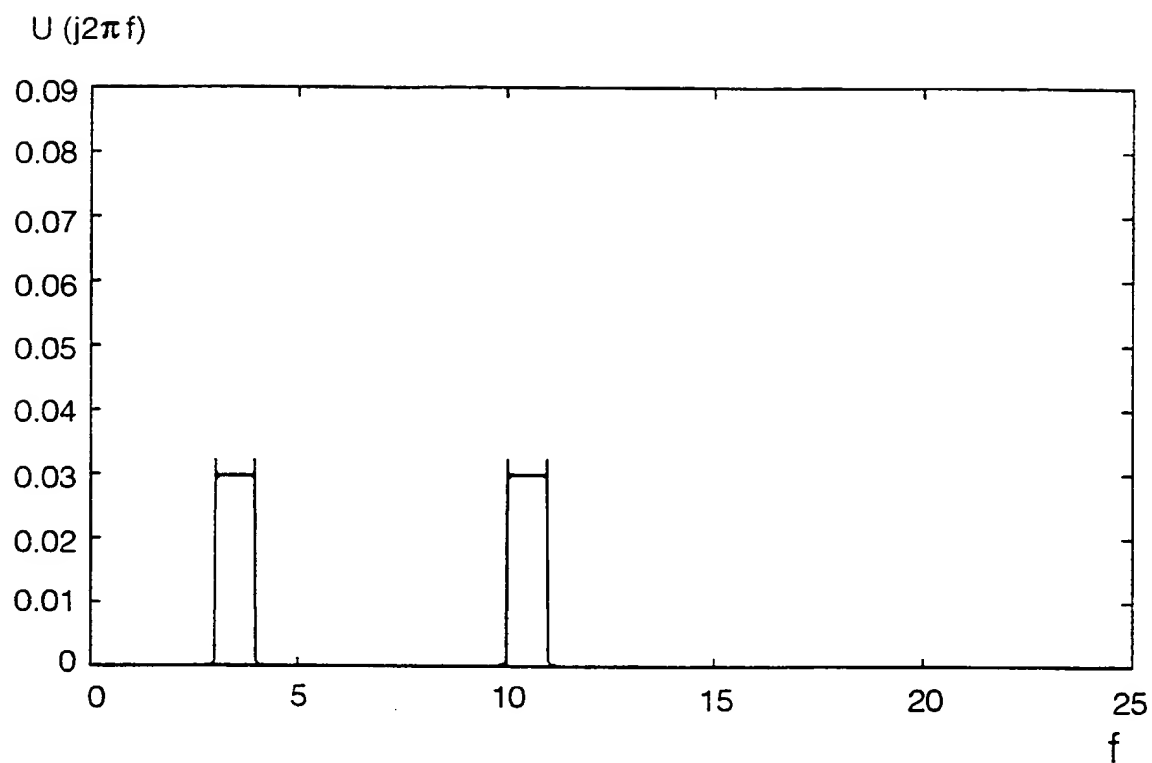


Fig. 37

32/38

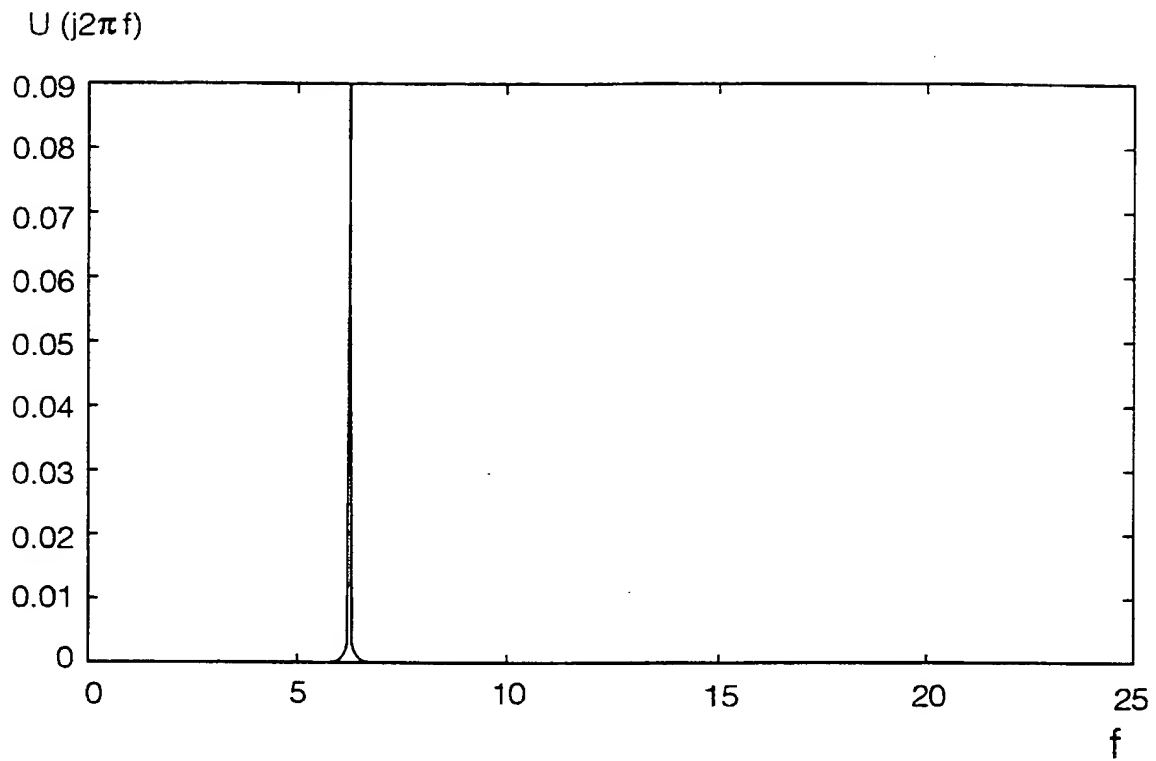


Fig. 38

33/38

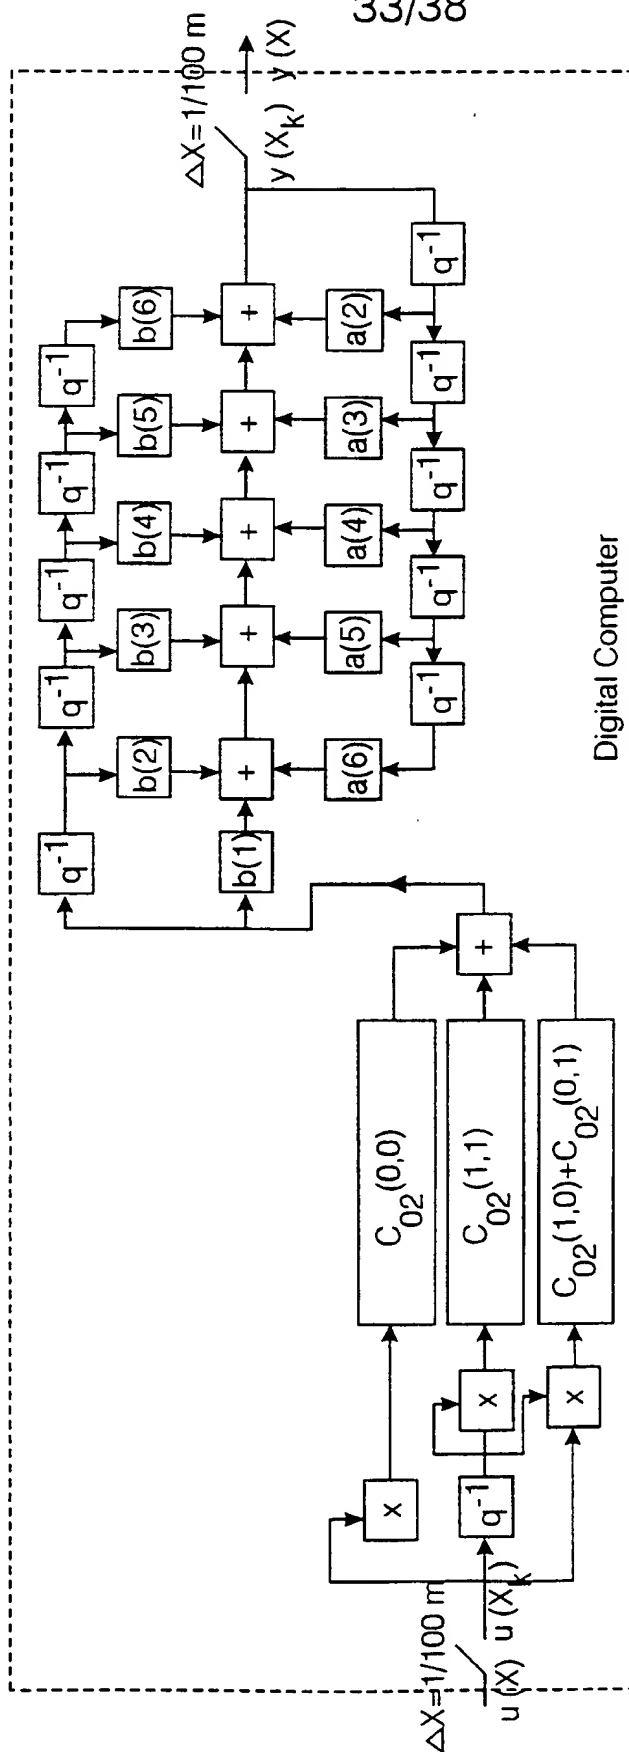


Fig. 39

34/38

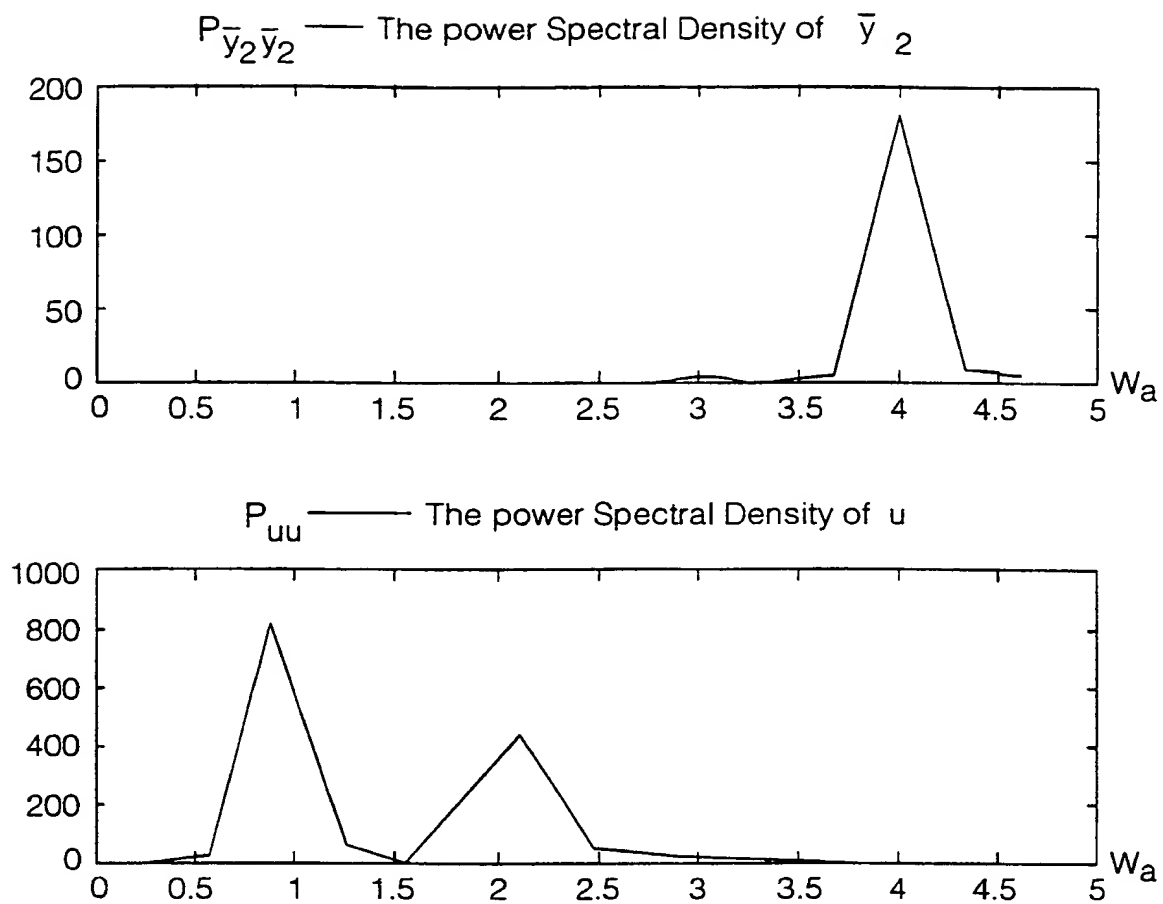


Fig. 40

35/38

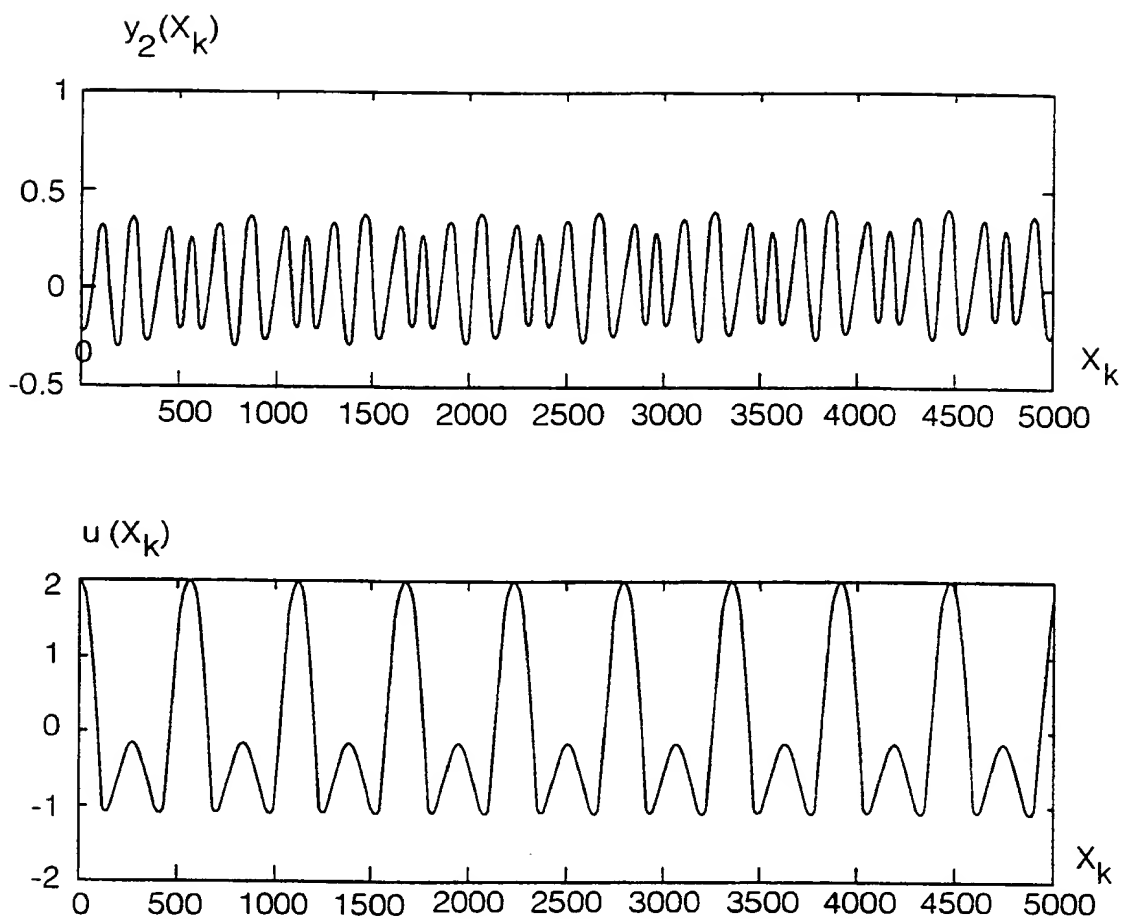


Fig. 41

36/38

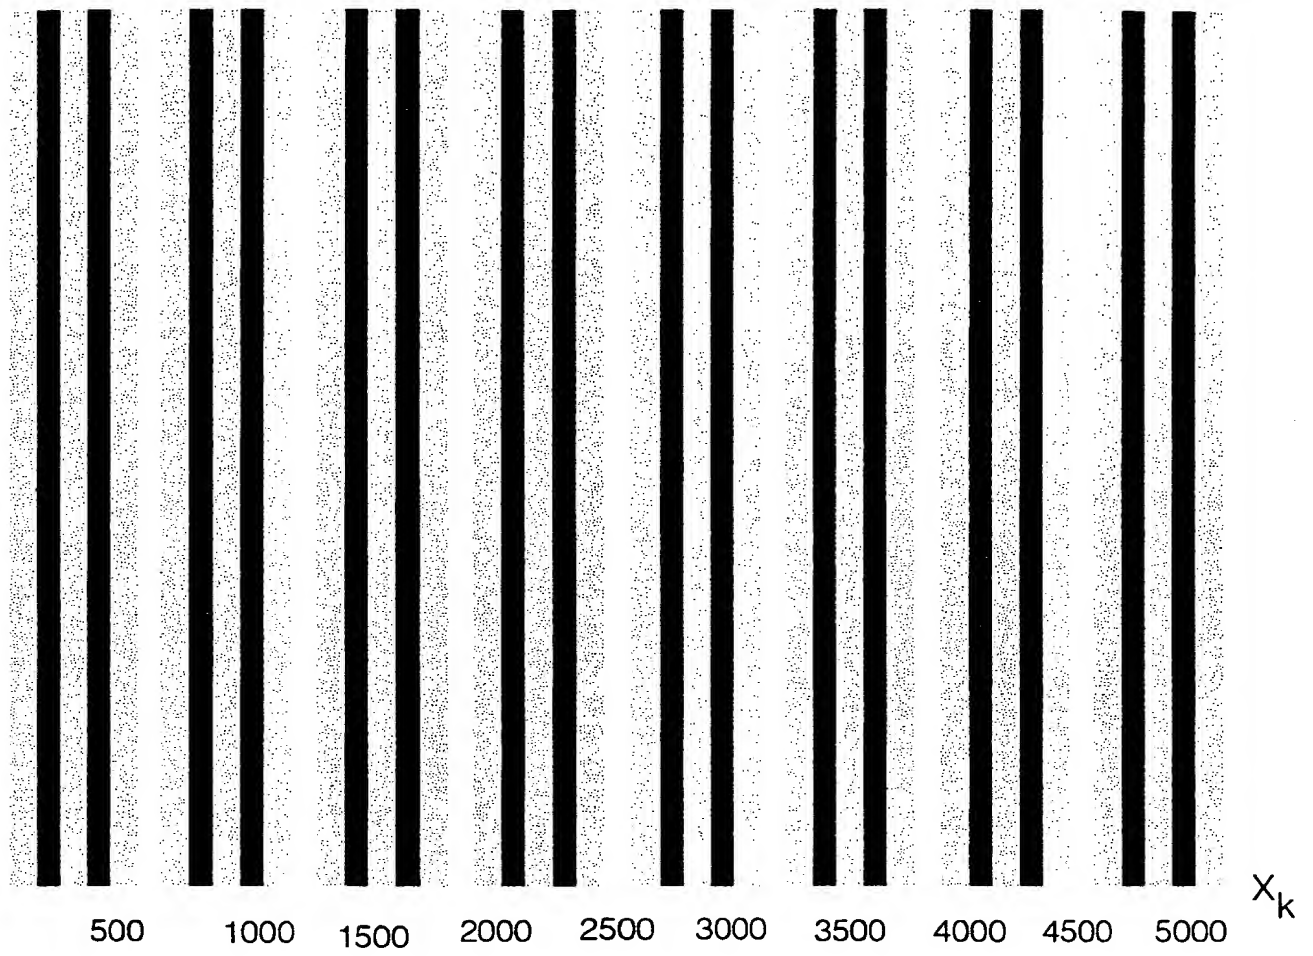


Fig. 42

37/38

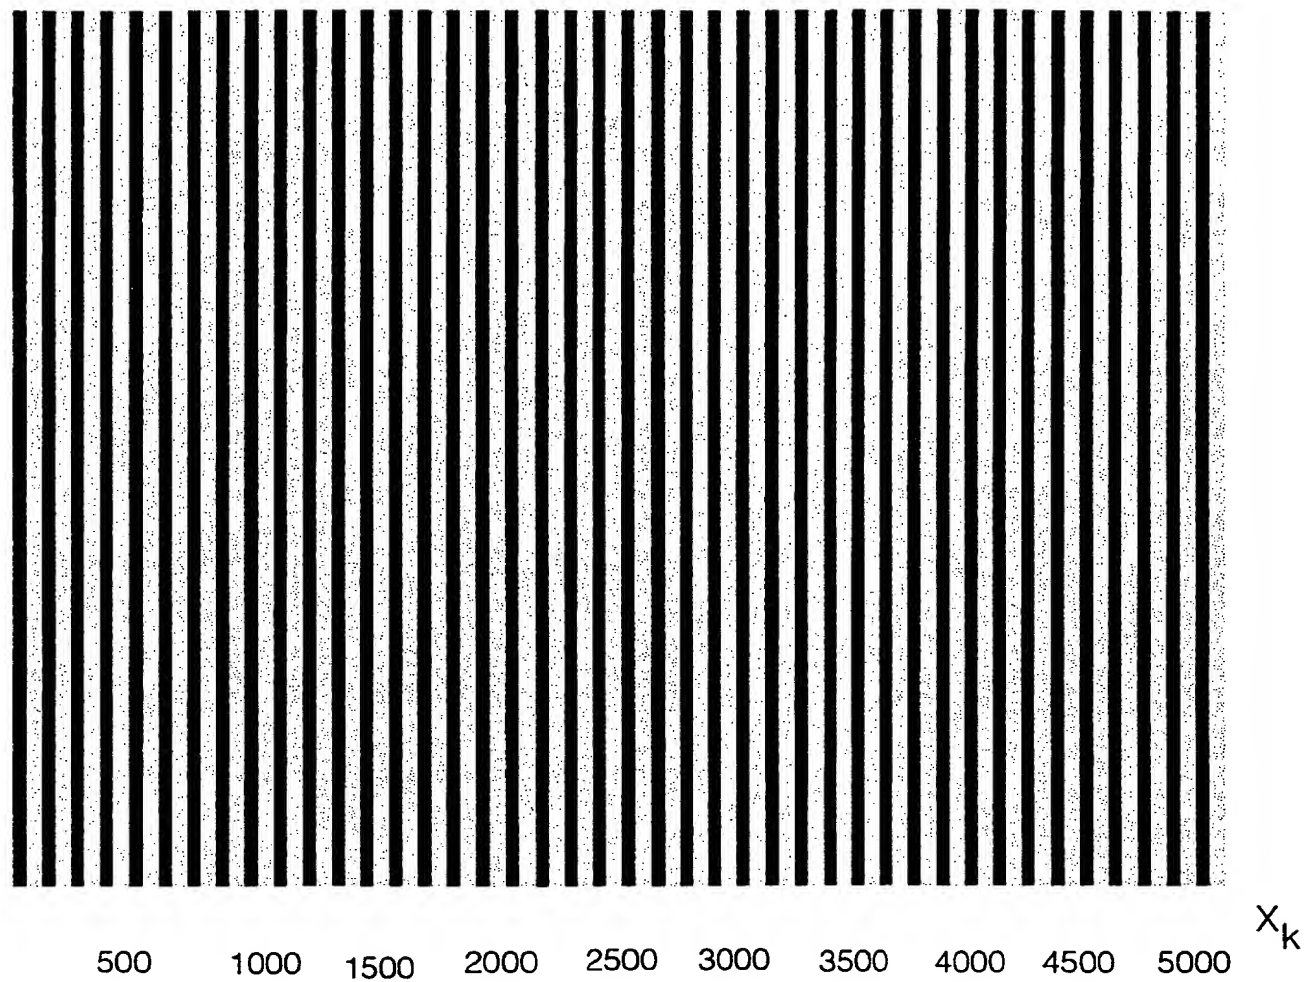


Fig. 43

38/38

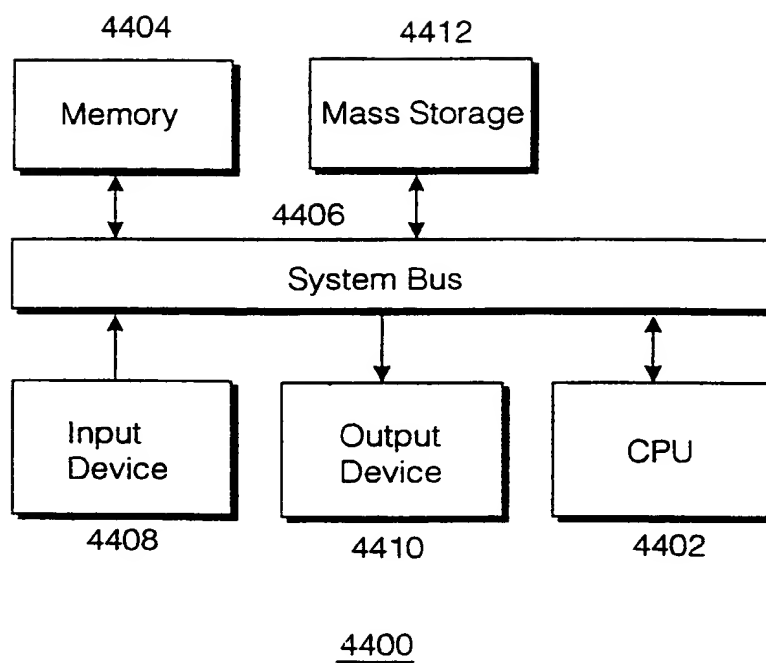


Fig. 44

INTERNATIONAL SEARCH REPORT

Internat. Application No

PCT/GB 99/00550

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H03H17/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H03H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	LEFEBVRE R ET AL: "Spectral amplitude warping (SAW) for noise spectrum shaping in audio coding" 1997 IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING (CAT. NO. 97CB36052), 1997 IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING, MUNICH, GERMANY, 21-24 APRIL 1997, pages 335-338 vol.1, XP002104974 ISBN 0-8186-7919-0, 1997, Los Alamitos, CA, USA, IEEE Comput. Soc. Press, USA	1,10,11, 20,30-37
X	see paragraph 2 see paragraph 3	29
A	EP 0 395 424 A (HEWLETT PACKARD CO) 31 October 1990 see column 6, line 2 - line 10	1,10,11, 20,29-37
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

4 June 1999

Date of mailing of the international search report

17/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

D/L PINTA BALLE... L

INTERNATIONAL SEARCH REPORT

Intern: al Application No
PCT/GB 99/00550

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 075 880 A (KRESSE JAMES M ET AL) 24 December 1991 see column 13, line 33 - line 49 -----	1, 10, 11, 20, 29-37
A	MAIO I A ET AL: "NARX approach to black-box modeling of circuit elements" ISCAS '98. PROCEEDINGS OF THE 1998 IEEE INTERNATIONAL SYMPOSIUM ON CIRCUITS AND SYSTEMS (CAT. NO.98CH36187), ISCAS '98 PROCEEDINGS OF THE 1998 IEEE INTERNATIONAL SYMPOSIUM ON CIRCUITS AND SYSTEMS, MONTEREY, CA, USA, 31 MAY-3 JUNE 1998, pages 411-414 vol.3, XP002104975 ISBN 0-7803-4455-3, 1998, New York, NY, USA, IEEE, USA see paragraph 2 -----	3

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat Application No

PCT/GB 99/00550

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0395424	A	31-10-1990	DE 69028793 D	14-11-1996
			DE 69028793 T	13-02-1997
			JP 2303212 A	17-12-1990
			US 5033018 A	16-07-1991
US 5075880	A	24-12-1991	US 5226000 A	06-07-1993
			US 5260704 A	09-11-1993